

Siemens Gigaset C590 IP



I. Podłączenie telefonu Gigaset C590IP

Podłącz słuchawkę oraz stację bazową zgodnie z instrukcją, która znajduje się na płycie CD w pudełku. Jeśli nie posiadasz instrukcji możesz ją pobrać na stronie sklepu partnerskiego www.4ip.pl.




1. Przygotuj słuchawkę: włóż akumulatory
2. Podłącz zasilacz do ładowarki i naładuj akumulatory
3. Podłącz kabel telefoniczny i zasilający do stacji bazowej (**tylko opcjonalnie**)
4. Podłącz stację bazową do sieci telefonicznej i zasilania
5. W celu połączenia stacji bazowej z Internetem podłącz ją do routera (do routera i modemu lub routera z wbudowanym modemem)
6. Komputer w sieci LAN (opcjonalnie) – umożliwi dodatkowe konfigurowanie stacji bazowej

II. Konfiguracja telefonu w przeglądarce WWW

Naciśnij niebieski przycisk na bazie telefonu. Na wyświetlaczu słuchawki wyświetli się adres IP bazy. Wpisz odczytany adres w pasku adresu przeglądarki internetowej, wyświetli się strona:

Gigaset C590 IP

SIEMENS

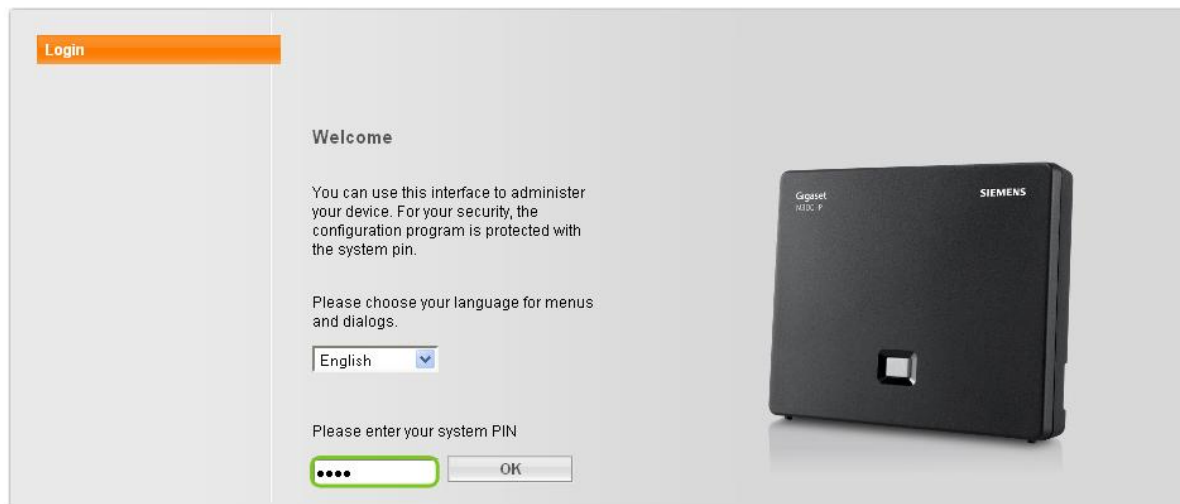

Login

Welcome

You can use this interface to administer your device. For your security, the configuration program is protected with the system pin.

Please choose your language for menus and dialogs.

English

Please enter your system PIN

OK


© Gigaset Communications GmbH 2010. All rights reserved.
Manufactured by Gigaset Communications GmbH under trademark license of Siemens AG.
As of 1 Oct. 2011 Gigaset products bearing the trademark 'Siemens' will exclusively use the trademark 'Gigaset'.

Domyślne hasło to: **0000 (cztery zera).**

Przejdź do zakładki **Settings -> Telephony -> Connections**

Gigaset C590 IP

SIEMENS

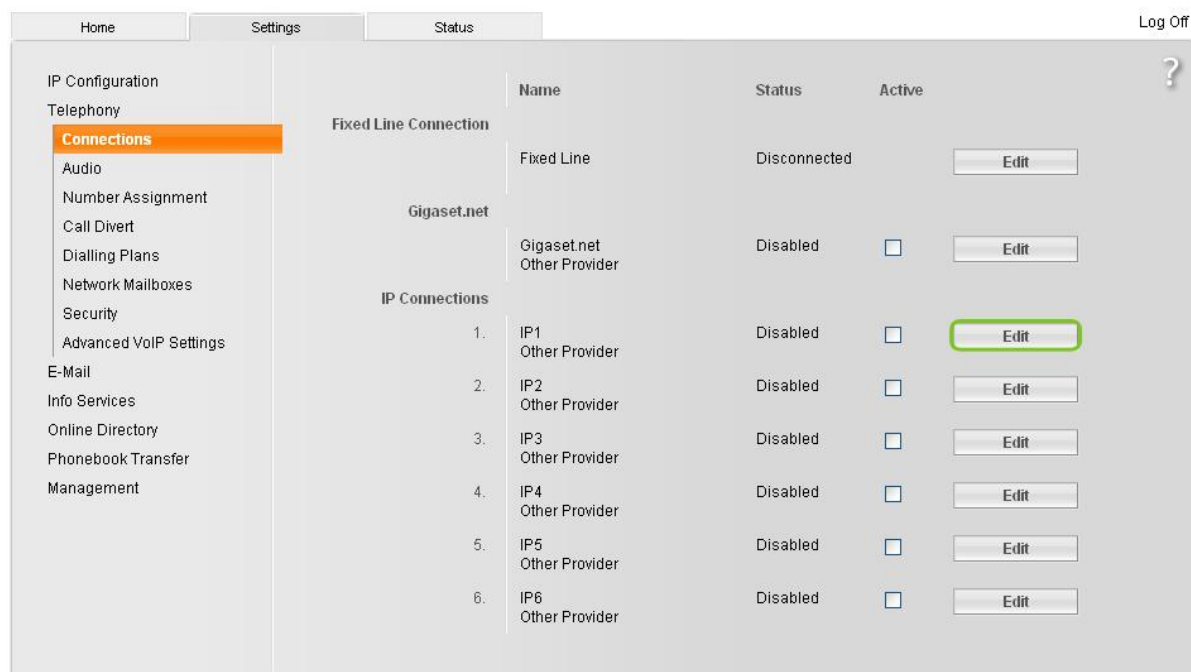

Home Settings Status Log Off

IP Configuration

Telephony

Connections

Audio

Number Assignment

Call Divert

Dialling Plans

Network Mailboxes

Security

Advanced VoIP Settings

E-Mail

Info Services

Online Directory

Phonebook Transfer

Management

Name	Status	Active	
Fixed Line Connection			
Fixed Line	Disconnected		Edit
Gigaset.net			
Gigaset.net Other Provider	Disabled	<input type="checkbox"/>	Edit
IP Connections			
1. IP1 Other Provider	Disabled	<input type="checkbox"/>	Edit
2. IP2 Other Provider	Disabled	<input type="checkbox"/>	Edit
3. IP3 Other Provider	Disabled	<input type="checkbox"/>	Edit
4. IP4 Other Provider	Disabled	<input type="checkbox"/>	Edit
5. IP5 Other Provider	Disabled	<input type="checkbox"/>	Edit
6. IP6 Other Provider	Disabled	<input type="checkbox"/>	Edit

Wybierz: **Edit**

Home Settings Status Log Off

IP Configuration
Telephony
Connections
Audio
Number Assignment
Call Divert
Dialling Plans
Network Mailboxes
Security
Advanced VoIP Settings
E-Mail
Info Services
Online Directory
Phonebook Transfer
Management

1. IP Connection ?

Assign a connection name or actual phone number for identification.

Connection Name or Number:

Auto Configuration

If your provider has issued you with a configuration code, you can use it to start the automatic connection configuration here.

Auto Configuration Code:

Profile Download

Provider: Freeconet

Profile Version: d_freeconet_pl.bin 1251727500

Personal Provider Data

Authentication name:

Authentication password:

Username:

Display name:

Wybierz: **Select VoIP Provider**

Log Off

Profile Download —●—●—●—●—


With selection of a provider most of the configuration data (General Provider Data, Listen Ports, Network, Codecs) for this provider are loaded automatically.

There are two steps necessary to get the configuration data:

- Choose country of your VoIP provider.
- Choose your VoIP provider.

To continue, click Next.

Kliknij **Next**


Profile Download 

Please choose the country from the list you want to load the provider list for.

Country

< Back **Next>** Cancel

Wybierz kraj: **Poland** i kliknij **Next**

Profile Download 

Please choose the provider from the list you need the configuration data from.

Provider

< Back **Finish**

Wybierz: **FreecoNet** i kliknij **Finish**

Podaj swoje dane użytkownika konta FreecoNet.

Gigaset C590 IP

SIEMENS

Home Settings Status Log Off

IP Configuration

Telephony

Connections

Audio

Number Assignment

Call Divert

Dialling Plans

Network Mailboxes

Security

Advanced VoIP Settings

E-Mail

Info Services

Online Directory

Phonebook Transfer

Management

1. IP Connection

Assign a connection name or actual phone number for identification.

Connection Name or Number:

Auto Configuration

If your provider has issued you with a configuration code, you can use it to start the automatic connection configuration here.

Auto Configuration Code:

Profile Download

Provider: Freeconet

Profile Version: d_freeconet_pl.bin 1251727500

Personal Provider Data

Authentication name:

Authentication password:

Username:

Display name:

Authentication Name: **Twój login FreecoNet**
Authentication password: **Twoje Hasło VoIP**
Username: **Twój login FreecoNet**
Display name: **Twój login FreecoNet**

Kliknij **Set**

Konto powinno się zalogować do FreecoNet (czas oczekiwania ~ 60 sekund).

Home Settings Status Log Off

IP Configuration

Telephony

Connections

Audio

Number Assignment

Call Divert

Dialling Plans

Network Mailboxes

Security

Advanced VoIP Settings

E-Mail

Info Services

Online Directory

Phonebook Transfer

Management

Fixed Line Connection

Name	Status	Active	
Fixed Line	Disconnected		<input type="button" value="Edit"/>

Gigaset.net

Gigaset.net	Disabled	<input type="checkbox"/>	<input type="button" value="Edit"/>
Other Provider			

IP Connections

1. IP1	Freeconet	Registered	<input checked="" type="checkbox"/>	<input type="button" value="Edit"/>
2. IP2	Other Provider	Disabled	<input type="checkbox"/>	<input type="button" value="Edit"/>
3. IP3	Other Provider	Disabled	<input type="checkbox"/>	<input type="button" value="Edit"/>
4. IP4	Other Provider	Disabled	<input type="checkbox"/>	<input type="button" value="Edit"/>
5. IP5	Other Provider	Disabled	<input type="checkbox"/>	<input type="button" value="Edit"/>
6. IP6	Other Provider	Disabled	<input type="checkbox"/>	<input type="button" value="Edit"/>

Przejdź do zakładki **Advanced Settings** i wprowadź następujące ustawienia:

Send settings:

RFC 2833

Use the R key to initiate call transfer with the SIP Refer method:

Yes

Transfer Call by On-Hook:

No

Derive target address:

from SIP contact header

Find target addr. automatically:

No

Derive target address:

from the SIP contact header

Hold on transfer target:

For attended transfer

Use random ports:

No

Powyższe ustawienia zapewniają prawidłowe działanie funkcji transferów połączeń.

Gigaset C590 IP

SIEMENS

The screenshot shows the 'Advanced VoIP Settings' page. The left sidebar contains a menu with 'Advanced VoIP Settings' highlighted. The main content area is divided into several sections: 'DTMF over VoIP connections' with 'Send settings' options (Automatic, Audio, RFC 2833, SIP Info), 'Call Transfer' with options for using the R key, transfer by on-hook, and target address derivation, 'Hook Flash (R-key)' which is disabled, and 'Listen ports for VoIP connections' with 'Use random ports' and port range settings for SIP and RTP. A 'Set' button is highlighted at the bottom.

Kliknij **Set**

***transfery połączeń na Siemens Gigaset C590 IP:**

- A > B (C590IP) odbiera połączenie
- B wciska klawisz **R** i wybiera numer C
- C odbiera i łączy się z B (możliwa zapowiedź)
- B wciska klawisz **R** i zestawia połączenie A > C

Przejdź do zakładki **Number Assignment** i wybierz opcję połączeń wychodzących poprzez usługę VoIP zaznaczając pozycję „for outgoing calls” przy Twojej słuchawce.

Gigaset C590 IP

SIEMENS

Home Settings Status Log Off

IP Configuration
Telephony
Connections
Audio
Number Assignment
Call Divert
Dialling Plans
Network Mailboxes
Security
Advanced VoIP Settings
E-Mail
Info Services
Online Directory
Phonebook Transfer
Management

Select the line for outgoing calls and also one or more lines for incoming calls for the desk phone and each handset. ?

Handsets
INT 1

Name INT 1

Connection	for outgoing calls	for incoming calls
IP1	<input checked="" type="radio"/>	<input checked="" type="checkbox"/>
Gigaset.net	<input type="radio"/>	<input checked="" type="checkbox"/>
Fixed Line	<input type="radio"/>	<input checked="" type="checkbox"/>

Select line for each outgoing call

Alternative Connection
Alternate connection in case the VoIP connection is offline.
Automatic Fallback to Fixed Line:
 Yes No

Set Cancel

Twój telefon Siemens Gigaset C590 IP jest gotowy do użycia !

Jeżeli telefon VoIP zarejestruje się poprawnie do platformy zadzwoń testowo na numer FreecoNet sprawdzający stan Twojego konta. W tym celu wybierz 901