URZĄDZENIA
KOMUNIKACJI
INTERNETOWEJ

Konfiguracja VoIP

Fritz!Box Fon WLAN 7390

FRITZ!Box
Fon WLAN

1. Podłączenie

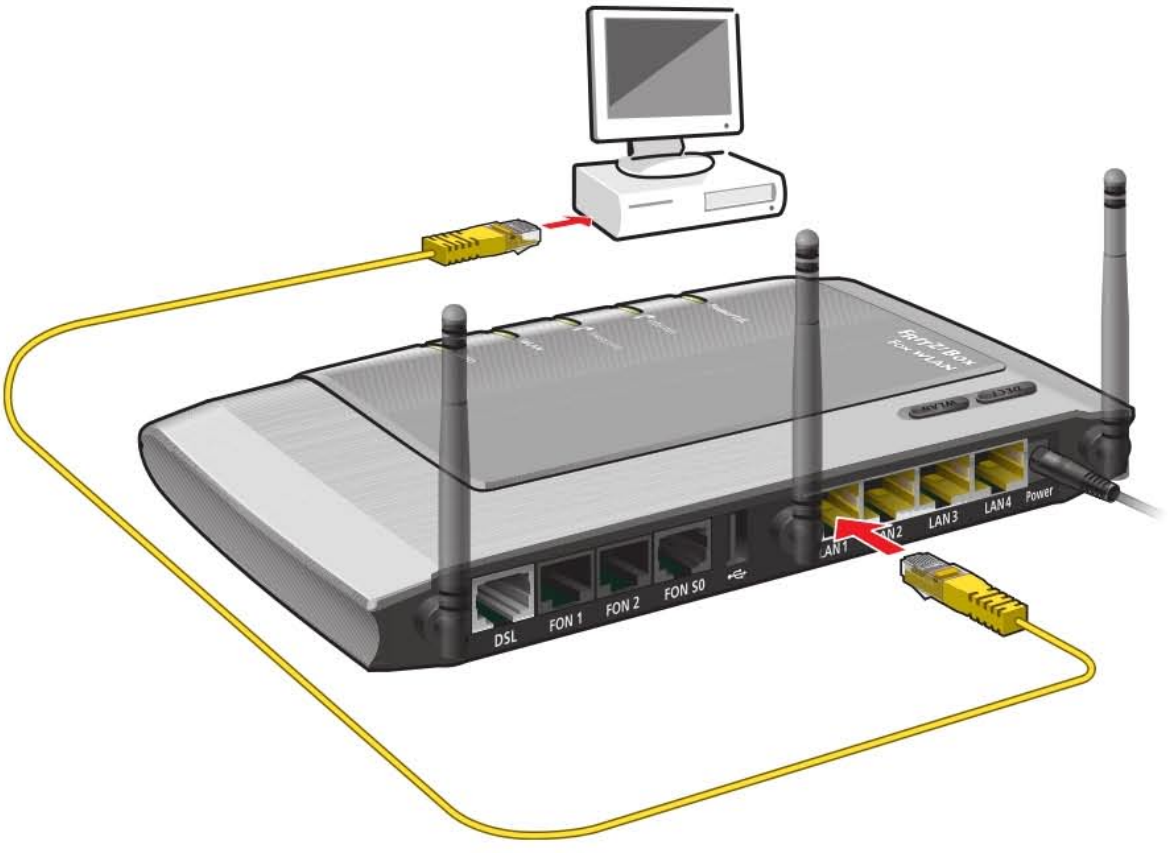
FRITZ!Box
Fon WLAN
WLAN
DECT
DSL
FON 1
FON 2
FON S0
LAN 1
LAN 2
LAN 3
LAN 4
Power

2. Konfiguracja części VoIP

I. Konfiguracja przez WWW

1. Uruchom dowolną przeglądarkę internetową. (np.: Internet Explorer lub FireFox)
2. W pasku adresu przeglądarki wprowadź adres IP bramki VoIP 192.168.178.1 lub fritz.box i naciśnij ENTER.
3. Przejdź do zakładki Expert Mode

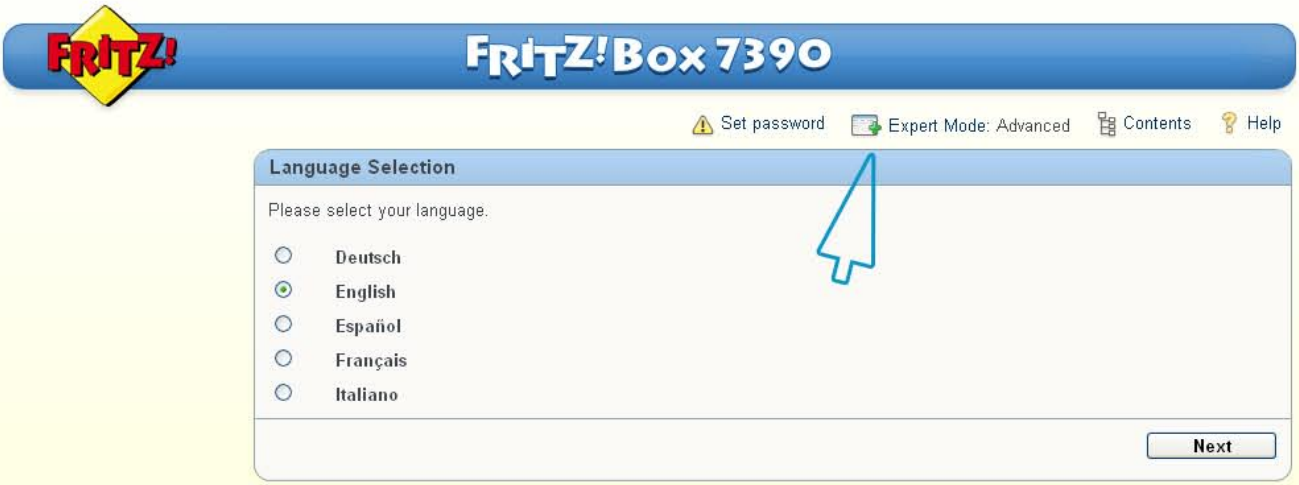
FRITZ!
FRITZ!Box 7390
Set password
Expert Mode: Advanced
Contents
Help
Next

Language Selection

Please select your language.

○ Deutsch
● English
○ Español
○ Français
○ Italiano

4. Ustaw widok Advanced View

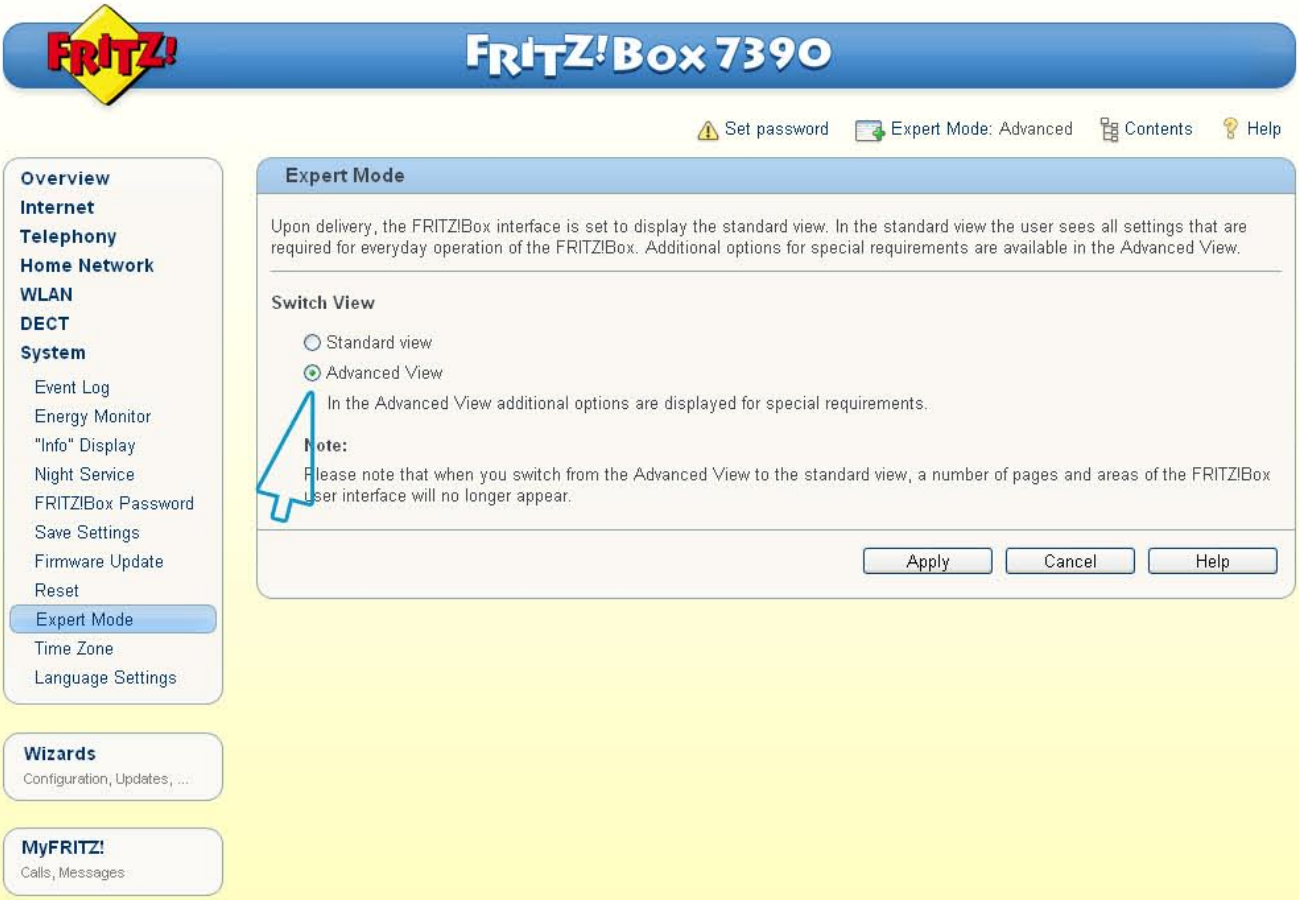
FRITZ!
FRITZ!Box 7390
Set password
Expert Mode: Advanced
Contents
Help
Overview
Internet
Telephony
Home Network
WLAN
DECT
System
Event Log
Energy Monitor
"Info" Display
Night Service
FRITZ!Box Password
Save Settings
Firmware Update
Reset
Expert Mode
Time Zone
Language Settings
Wizards
Configuration, Updates, ...
MyFRITZ!
Calls, Messages
Apply
Cancel
Help

Expert Mode

Upon delivery, the FRITZ!Box interface is set to display the standard view. In the standard view the user sees all settings that are required for everyday operation of the FRITZ!Box. Additional options for special requirements are available in the Advanced View.

Switch View

○ Standard view
● Advanced View

In the Advanced View additional options are displayed for special requirements.

Note:

Please note that when you switch from the Advanced View to the standard view, a number of pages and areas of the FRITZ!Box user interface will no longer appear.

5. Przejdź do Telephony > Own Telephone Number i dodaj konto SIP wybierając New Telephone Number

FRITZ!
FRITZ!Box 7390
Set password
Expert Mode: Advanced
Contents
Help

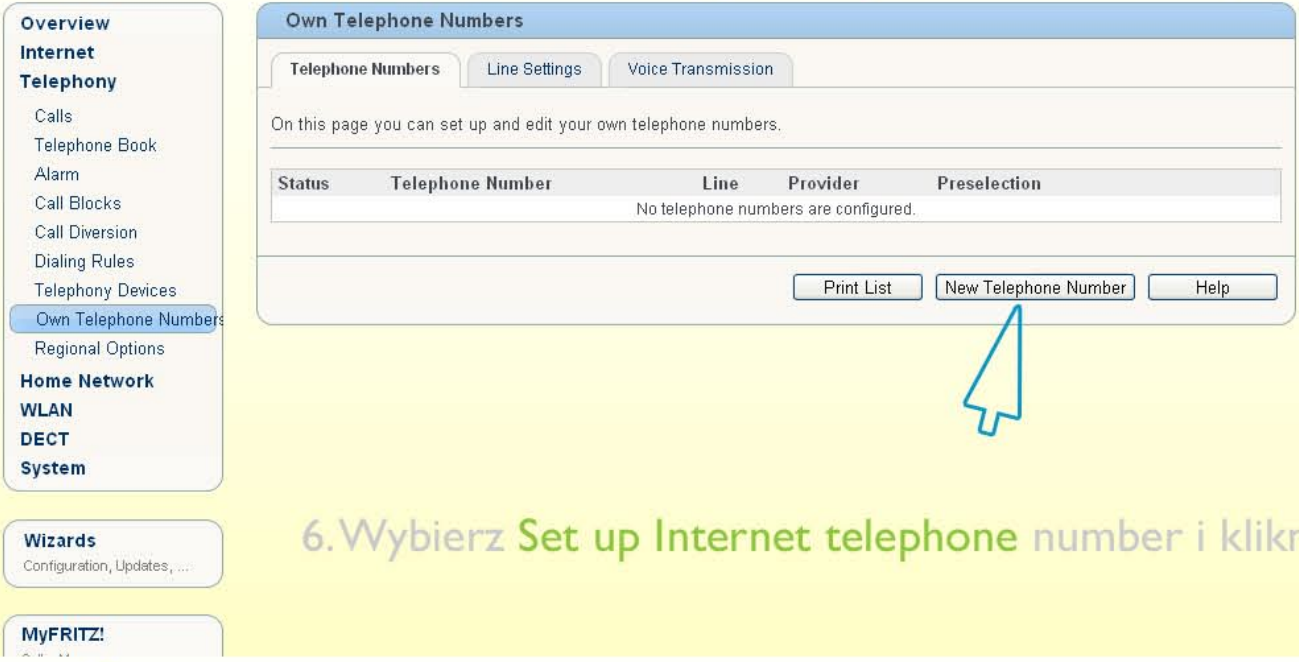

Overview
Internet
Telephony
- Calls
- Telephone Book
- Alarm
- Call Blocks
- Call Diversion
- Dialing Rules
- Telephony Devices
- Own Telephone Numbers
- Regional Options

Home Network
WLAN
DECT
System

Wizards
Configuration, Updates, ...

MyFRITZ!

Own Telephone Numbers

Telephone Numbers | Line Settings | Voice Transmission

On this page you can set up and edit your own telephone numbers.

Status	Telephone Number	Line	Provider	Preselection
No telephone numbers are configured.				

Print List
New Telephone Number
Help

6. Wybierz **Set up Internet telephone** number i kliknij **Next**

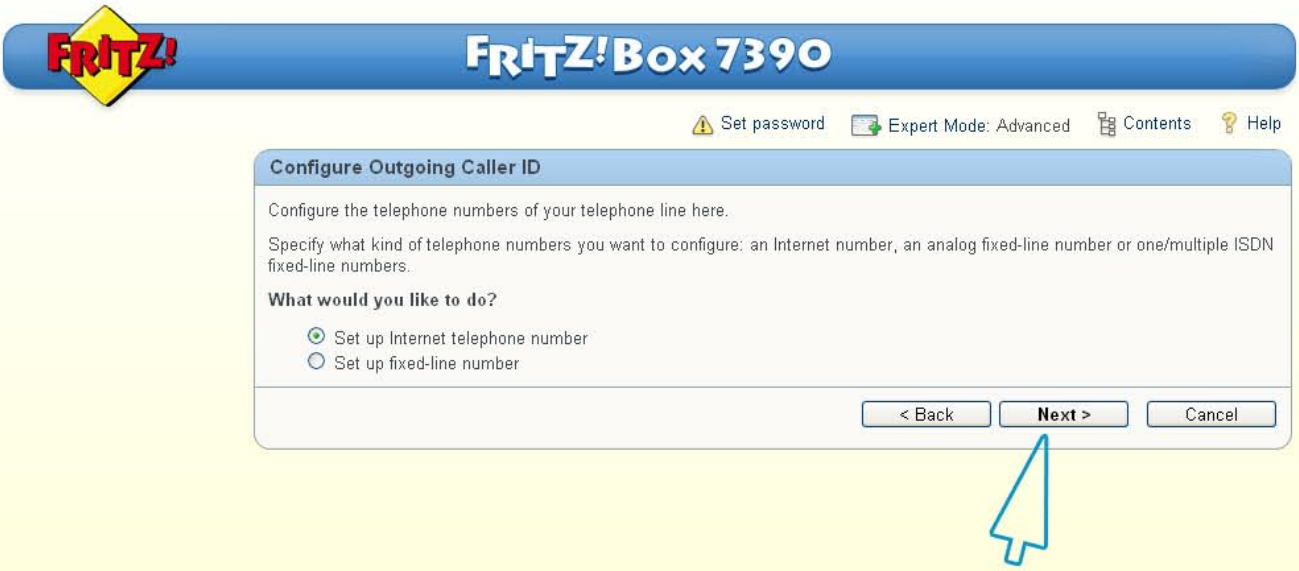

FRITZ!
FRITZ!Box 7390
Set password
Expert Mode: Advanced
Contents
Help

Configure Outgoing Caller ID

Configure the telephone numbers of your telephone line here.

Specify what kind of telephone numbers you want to configure: an Internet number, an analog fixed-line number or one/multiple ISDN fixed-line numbers.

What would you like to do?

● Set up Internet telephone number
○ Set up fixed-line number

< Back
Next >
Cancel

7. Uzupełnij pola według schematu poniżej.

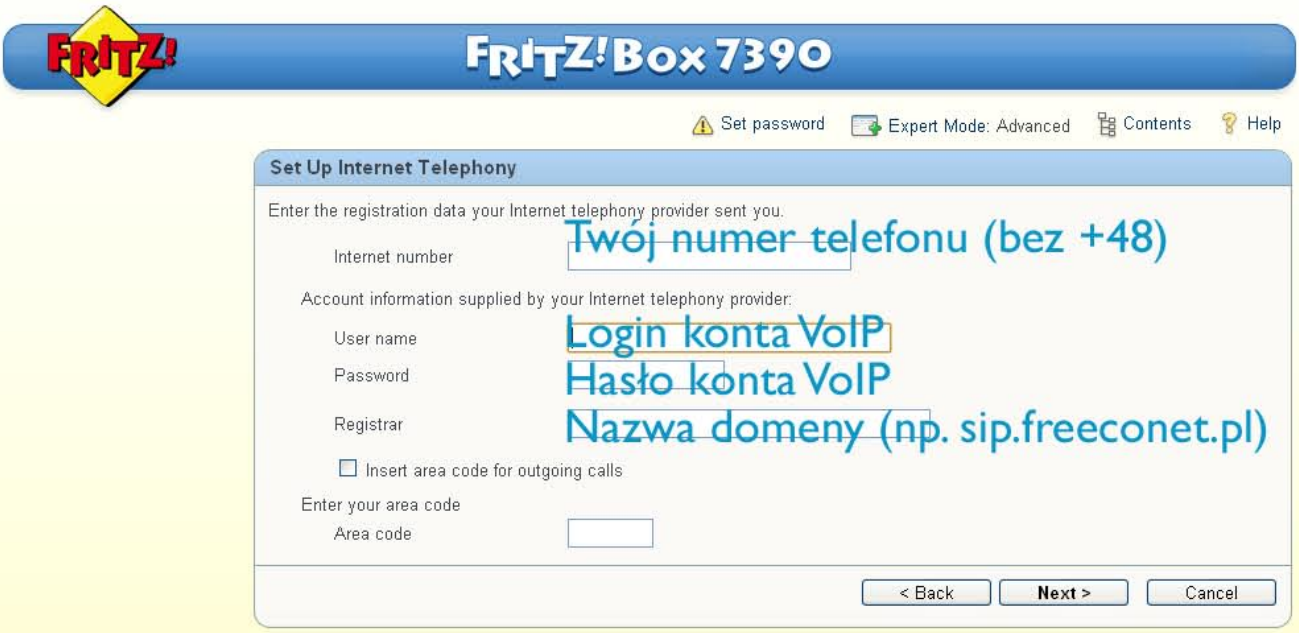

FRITZ!
FRITZ!Box 7390
Set password
Expert Mode: Advanced
Contents
Help

Set Up Internet Telephony

Enter the registration data your Internet telephony provider sent you.

Internet number: Twój numer telefonu (bez +48)

Account information supplied by your Internet telephony provider:

User name: Login konta VoIP
Password: Hasło konta VoIP
Registrar: Nazwa domeny (np. sip.freeconet.pl)

☐ Insert area code for outgoing calls

Enter your area code
Area code:

< Back
Next >
Cancel

8. Edytuj dodany numer klikając w pozycję **Edit**

FRITZ!
FRITZ!Box 7390

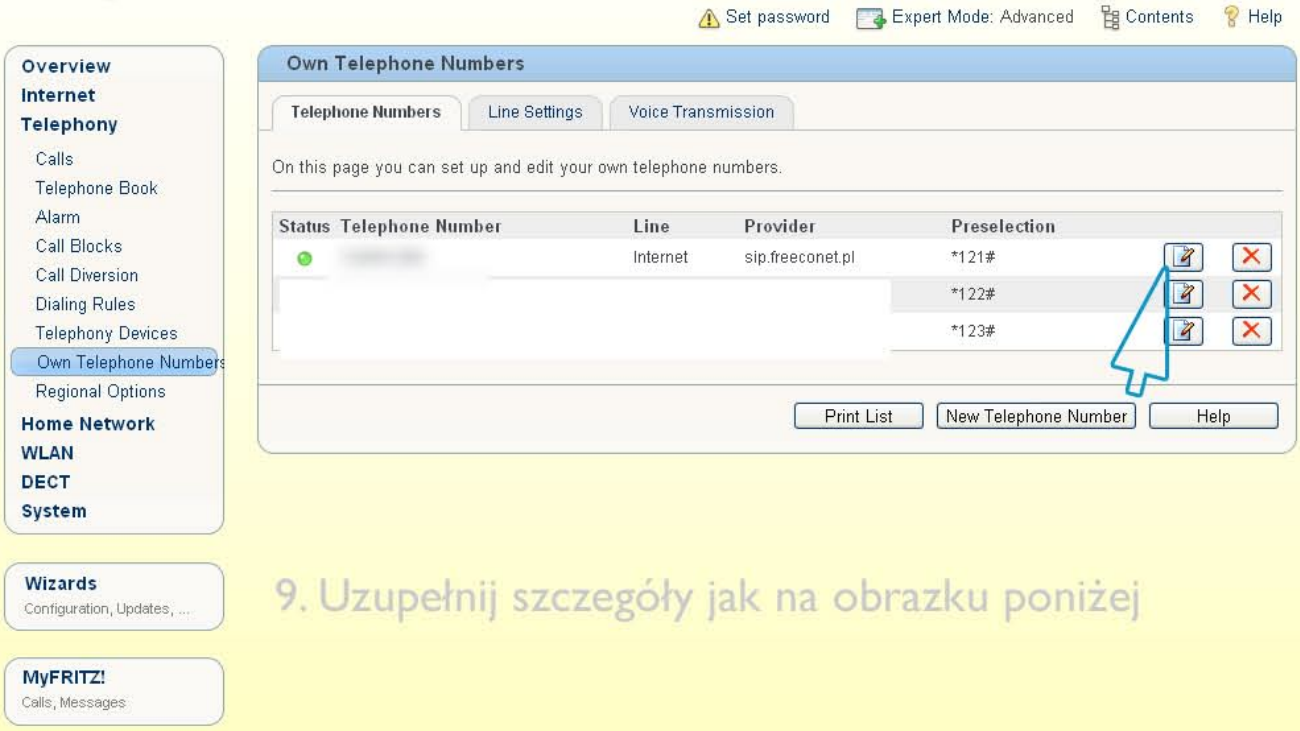
Set password
Expert Mode: Advanced
Contents
Help
Overview
Internet
Telephony
Calls
Telephone Book
Alarm
Call Blocks
Call Diversion
Dialing Rules
Telephony Devices
Own Telephone Numbers
Regional Options
Home Network
WLAN
DECT
System
Wizards
Configuration, Updates, ...
MyFRITZ!
Calls, Messages
Own Telephone Numbers
Telephone Numbers
Line Settings
Voice Transmission
Print List
New Telephone Number
Help

On this page you can set up and edit your own telephone numbers.

Status	Telephone Number	Line	Provider	Preselection
●	[redacted]	Internet	sip.freeconet.pl	*121#
[redacted]				*122#
				*123#

9. Uzupełnij szczegóły jak na obrazku poniżej

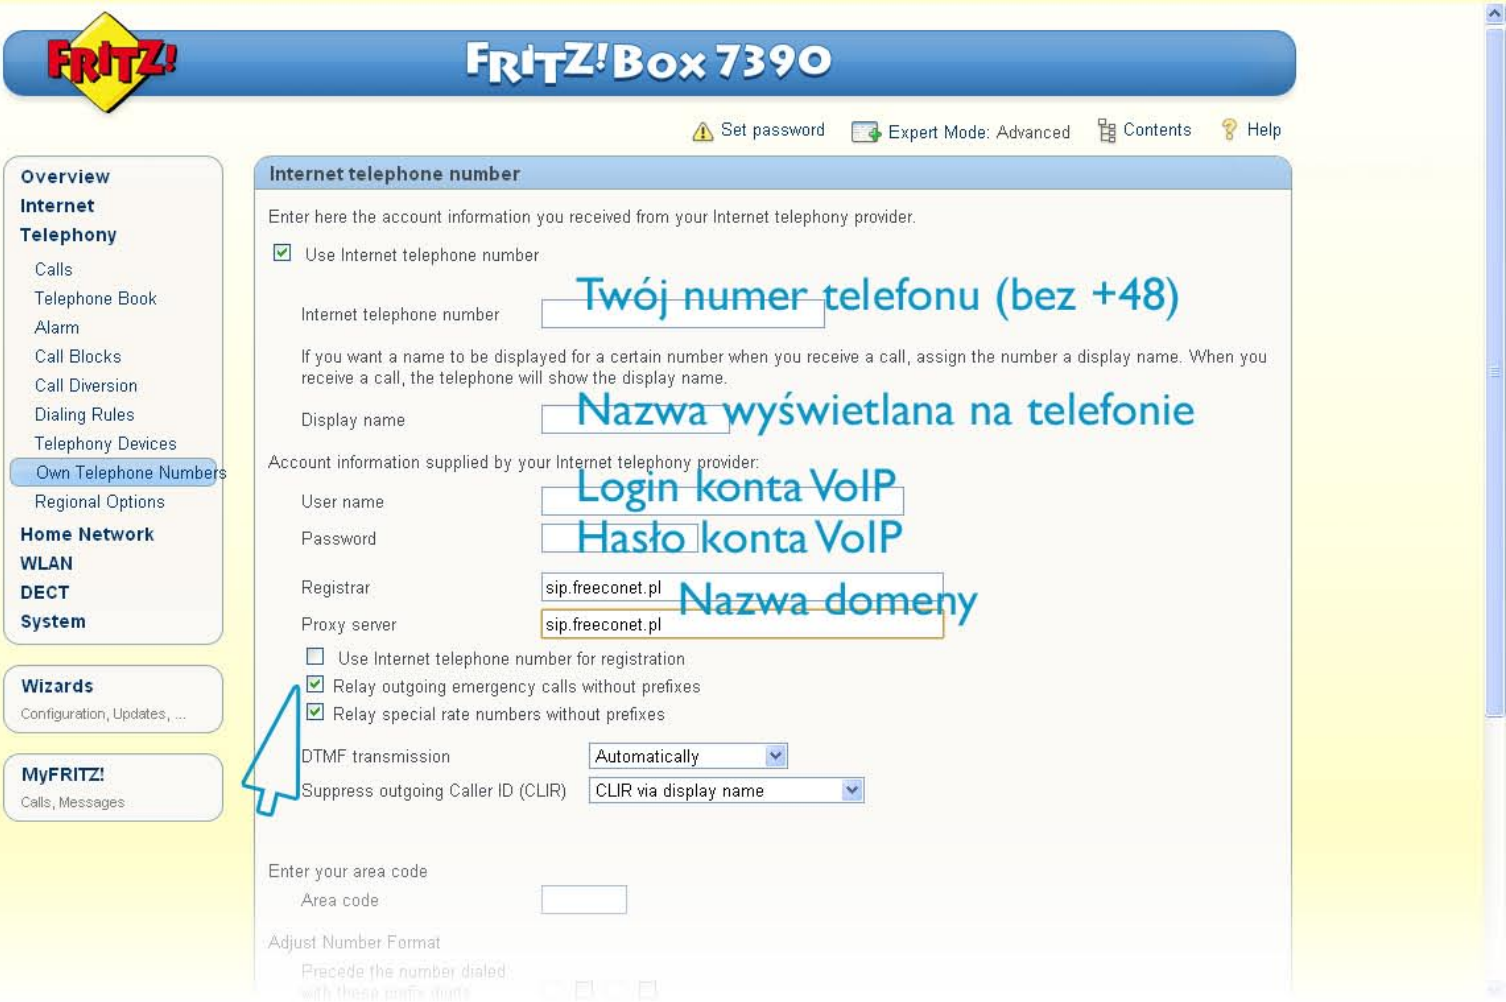
FRITZ!
FRITZ!Box 7390
Set password
Expert Mode: Advanced
Contents
Help
Overview
Internet
Telephony
Calls
Telephone Book
Alarm
Call Blocks
Call Diversion
Dialing Rules
Telephony Devices
Own Telephone Numbers
Regional Options
Home Network
WLAN
DECT
System
Wizards
Configuration, Updates, ...
MyFRITZ!
Calls, Messages
Internet telephone number

Enter here the account information you received from your Internet telephony provider.

☑ Use Internet telephone number

Internet telephone number: Twój numer telefonu (bez +48)

If you want a name to be displayed for a certain number when you receive a call, assign the number a display name. When you receive a call, the telephone will show the display name.

Display name: Nazwa wyświetlana na telefonie

Account information supplied by your Internet telephony provider:

User name: Login konta VoIP

Password: Hasło konta VoIP

Registrar: sip.freeconet.pl

Proxy server: sip.freeconet.pl

Nazwa domeny

☐ Use Internet telephone number for registration

☑ Relay outgoing emergency calls without prefixes

☑ Relay special rate numbers without prefixes

DTMF transmission: Automatically

Suppress outgoing Caller ID (CLIR): CLIR via display name

Enter your area code

Area code

Adjust Number Format

Precede the number dialed with these prefix digits

Zapisz ustawienia

II. Rejestracja słuchawek DECT (max. 3 połączenia VoIP równocześnie)

1. Zarejestruj słuchawkę zgodnie załączoną do urządzenia instrukcją
2. Przejdź do zakładki DECT (zarejestrowna słuchawka pojawi się na liście)
3. Kliknij Edit

FRITZ!
FRITZ!Box 7390
Set password
Expert Mode: Advanced
Contents
Help

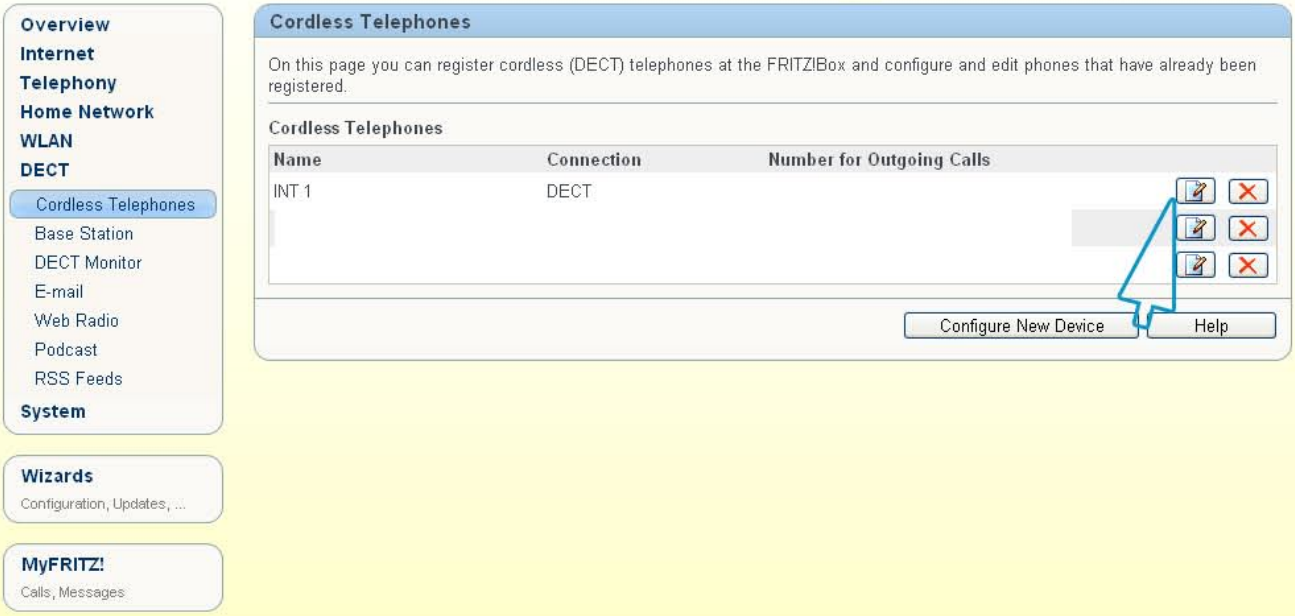
Overview
Internet
Telephony
Home Network
WLAN
DECT
Cordless Telephones
Base Station
DECT Monitor
E-mail
Web Radio
Podcast
RSS Feeds
System
Wizards
Configuration, Updates, ...
MyFRITZ!
Calls, Messages
Configure New Device
Help

Cordless Telephones

On this page you can register cordless (DECT) telephones at the FRITZ!Box and configure and edit phones that have already been registered.

Cordless Telephones

Name	Connection	Number for Outgoing Calls
INT 1	DECT	

4. Ustaw reguły dla połączeń wychodzących / przychodzących dla zarejestrowanych słuchawek

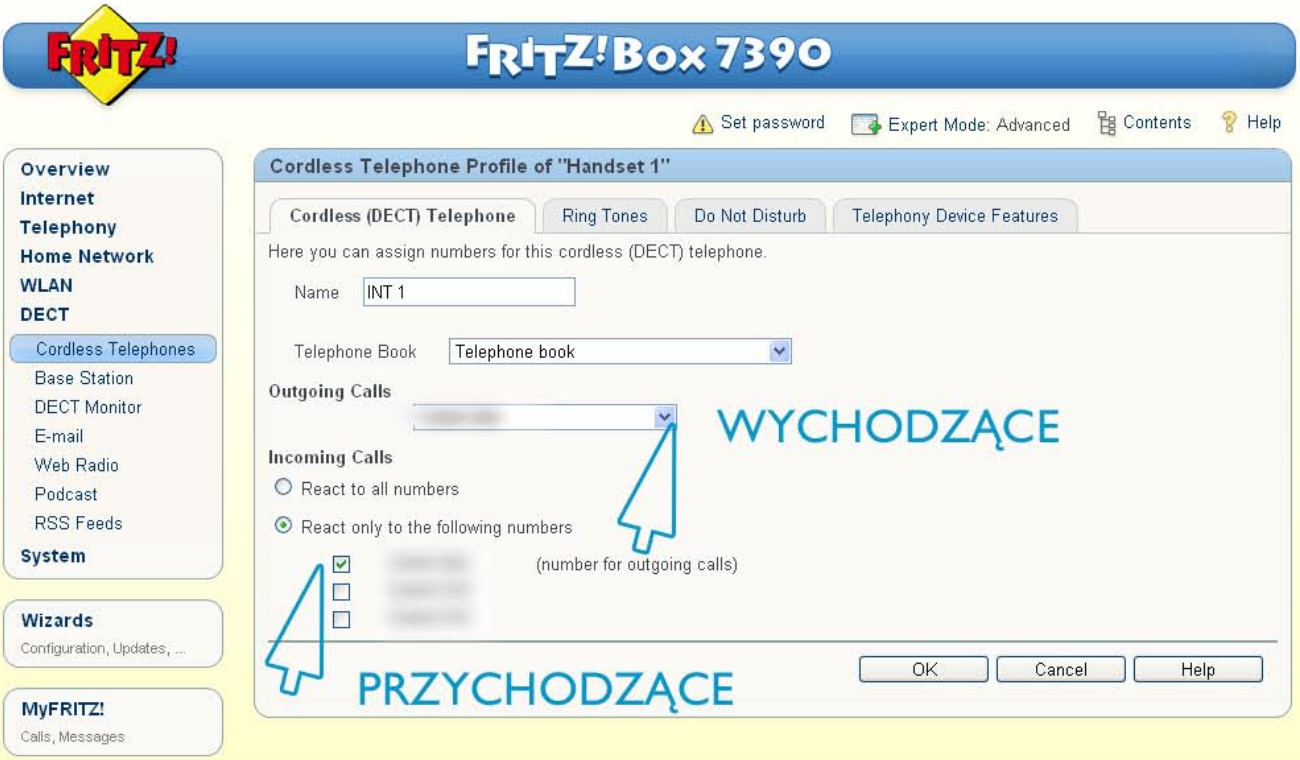
FRITZ!
FRITZ!Box 7390
Set password
Expert Mode: Advanced
Contents
Help
Overview
Internet
Telephony
Home Network
WLAN
DECT
Cordless Telephones
Base Station
DECT Monitor
E-mail
Web Radio
Podcast
RSS Feeds
System
Wizards
Configuration, Updates, ...
MyFRITZ!
Calls, Messages
Cordless (DECT) Telephone
Ring Tones
Do Not Disturb
Telephony Device Features
OK
Cancel
Help
WYCHODZĄCE
PRZYCHODZĄCE

Cordless Telephone Profile of "Handset 1"

Here you can assign numbers for this cordless (DECT) telephone.

Name: INT 1

Telephone Book: Telephone book

Outgoing Calls

[redacted]

Incoming Calls

○ React to all numbers

● React only to the following numbers

☑ [redacted] (number for outgoing calls)
☐ [redacted]
☐ [redacted]

5. Sprawdź status wprowadzonych ustawień w zakładce Overview

FRITZ!
FRITZ!Box 7390
Set password
Expert Mode: Advanced
Contents
Help

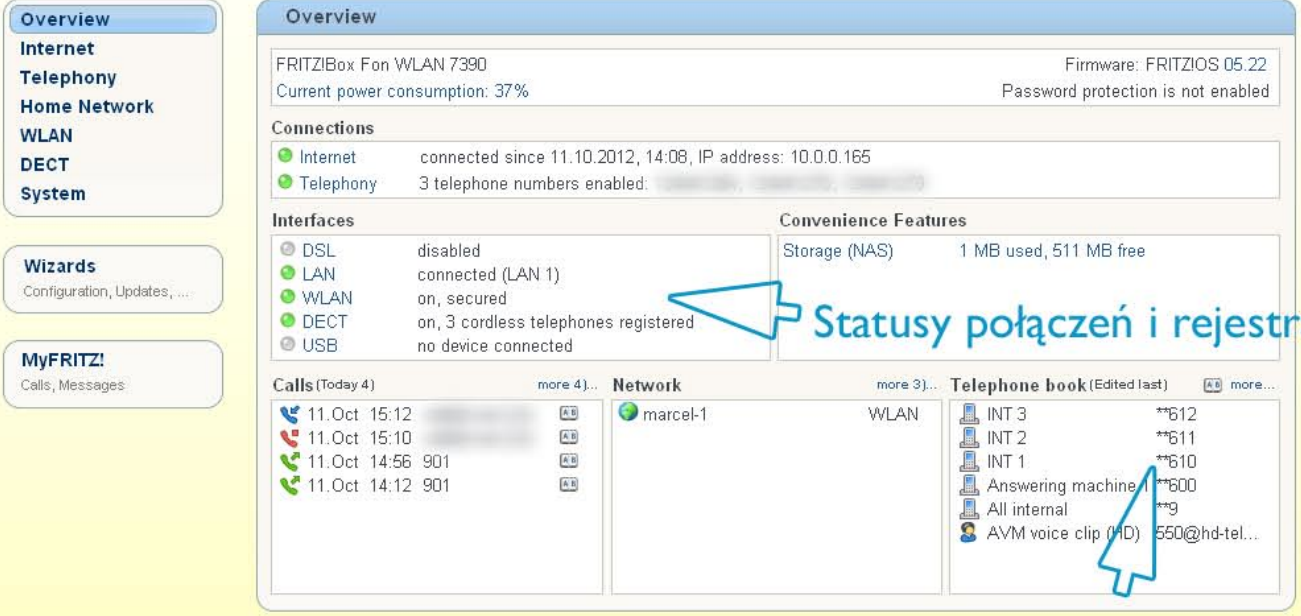
Overview
Internet
Telephony
Home Network
WLAN
DECT
System
Wizards
Configuration, Updates, ...
MyFRITZ!
Calls, Messages

Overview

FRITZ!Box Fon WLAN 7390 — Firmware: FRITZ!OS 05.22
Current power consumption: 37% — Password protection is not enabled

Connections

Internet	connected since 11.10.2012, 14:08, IP address: 10.0.0.165
Telephony	3 telephone numbers enabled: [redacted]

Interfaces

DSL	disabled
LAN	connected (LAN 1)
WLAN	on, secured
DECT	on, 3 cordless telephones registered
USB	no device connected

Convenience Features

Storage (NAS)	1 MB used, 511 MB free

Statusy połączeń i rejestracji

Calls (Today 4) more 4)...

11.Oct	15:12	[redacted]
11.Oct	15:10	[redacted]
11.Oct	14:56	901
11.Oct	14:12	901

Network more 3)...

marcel-1	WLAN

Telephone book (Edited last) more...

INT 3	**612
INT 2	**611
INT 1	**610
Answering machine 1	**600
All internal	**9
AVM voice clip (HD)	550@hd-tel...

Manual | FAQs | FRITZ! Clips | Programs | www.avm.de

Zarejestrowane słuchawki oraz numery wewnętrzne przyznane przez Fritz!Box-a (zawsze stałe dla słuchawek DECT / innych terminali)

III. Rejestracja innych urządzeń (max. 5 połączeń VoIP równocześnie)

W zakładce **Telephony > Telephony Devices** można wyświetlić listę wszystkich skonfigurowanych terminali z wewnętrzną centralą Fritza. W tej zakładce również można zarejestrować do Fritza inne urządzenia jak np. **telefon IP** lub **telefon analogowy FON1/FON2** (wbudowana bramka VoIP Fritza)

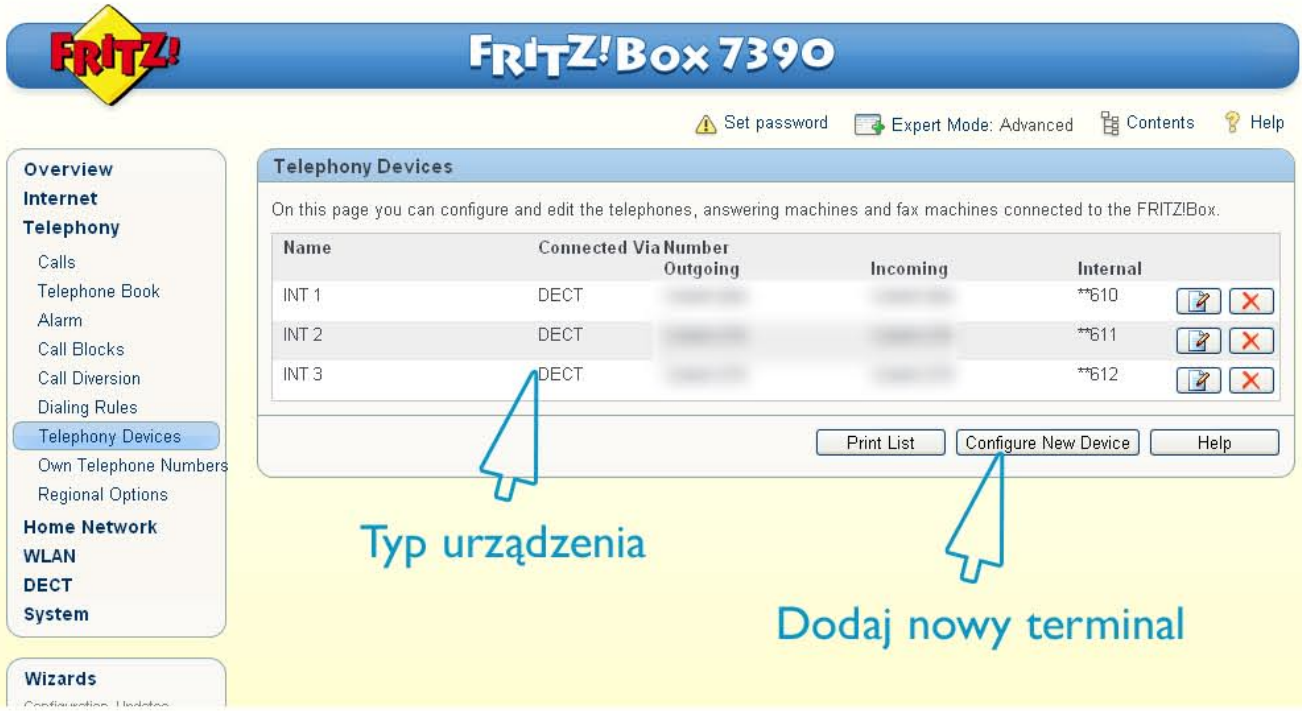
FRITZ!
FRITZ!Box 7390
Set password
Expert Mode: Advanced
Contents
Help
Overview
Internet
Telephony
Calls
Telephone Book
Alarm
Call Blocks
Call Diversion
Dialing Rules
Telephony Devices
Own Telephone Numbers
Regional Options
Home Network
WLAN
DECT
System
Wizards
Print List
Configure New Device
Help

Telephony Devices

On this page you can configure and edit the telephones, answering machines and fax machines connected to the FRITZ!Box.

Name	Connected Via	Number Outgoing	Incoming	Internal
INT 1	DECT	[redacted]	[redacted]	**610
INT 2	DECT	[redacted]	[redacted]	**611
INT 3	DECT	[redacted]	[redacted]	**612

Typ urządzenia

Dodaj nowy terminal

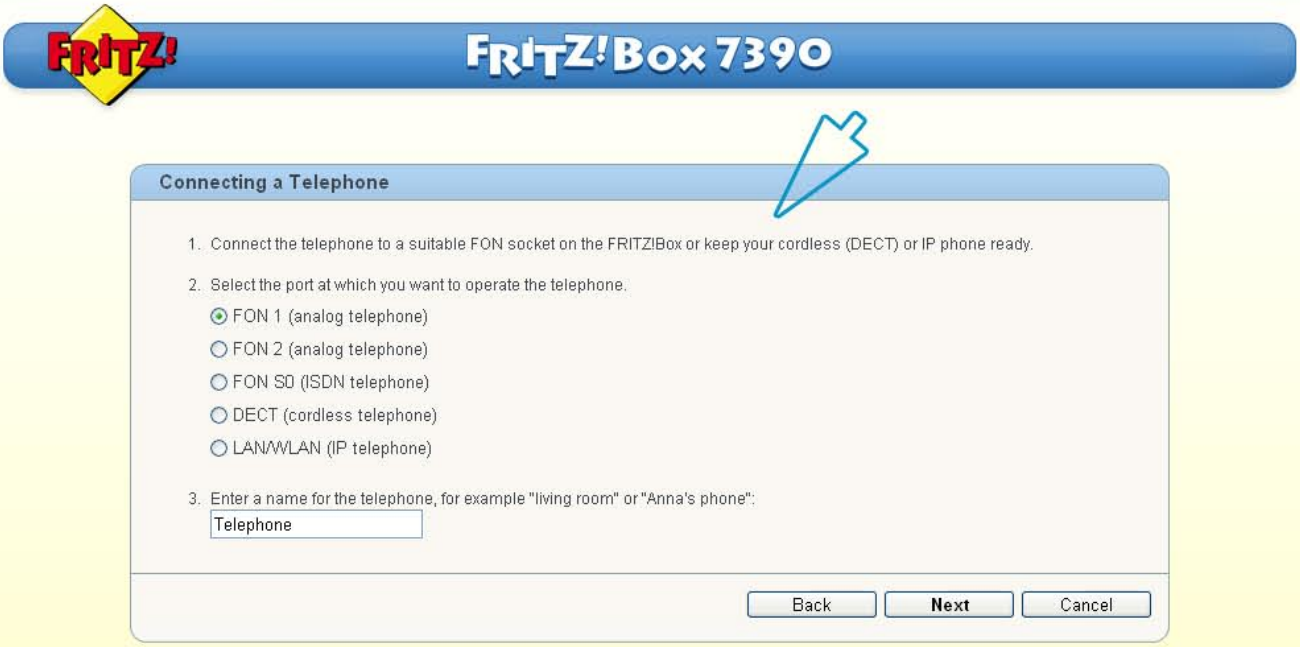
FRITZ!
FRITZ!Box 7390

Connecting a Telephone

1. Connect the telephone to a suitable FON socket on the FRITZ!Box or keep your cordless (DECT) or IP phone ready.
2. Select the port at which you want to operate the telephone.
   - ● FON 1 (analog telephone)
   - ○ FON 2 (analog telephone)
   - ○ FON S0 (ISDN telephone)
   - ○ DECT (cordless telephone)
   - ○ LAN/WLAN (IP telephone)
3. Enter a name for the telephone, for example "living room" or "Anna's phone": Telephone

Back
Next
Cancel

IV. Ustawienia przekierowań

W zakładce Telephony > Call Diversion można ustawić przekierowania połączeń. W przypadku gdy dana osoba nie odbiera, połączenie zostaje przekierowane na inny numer.

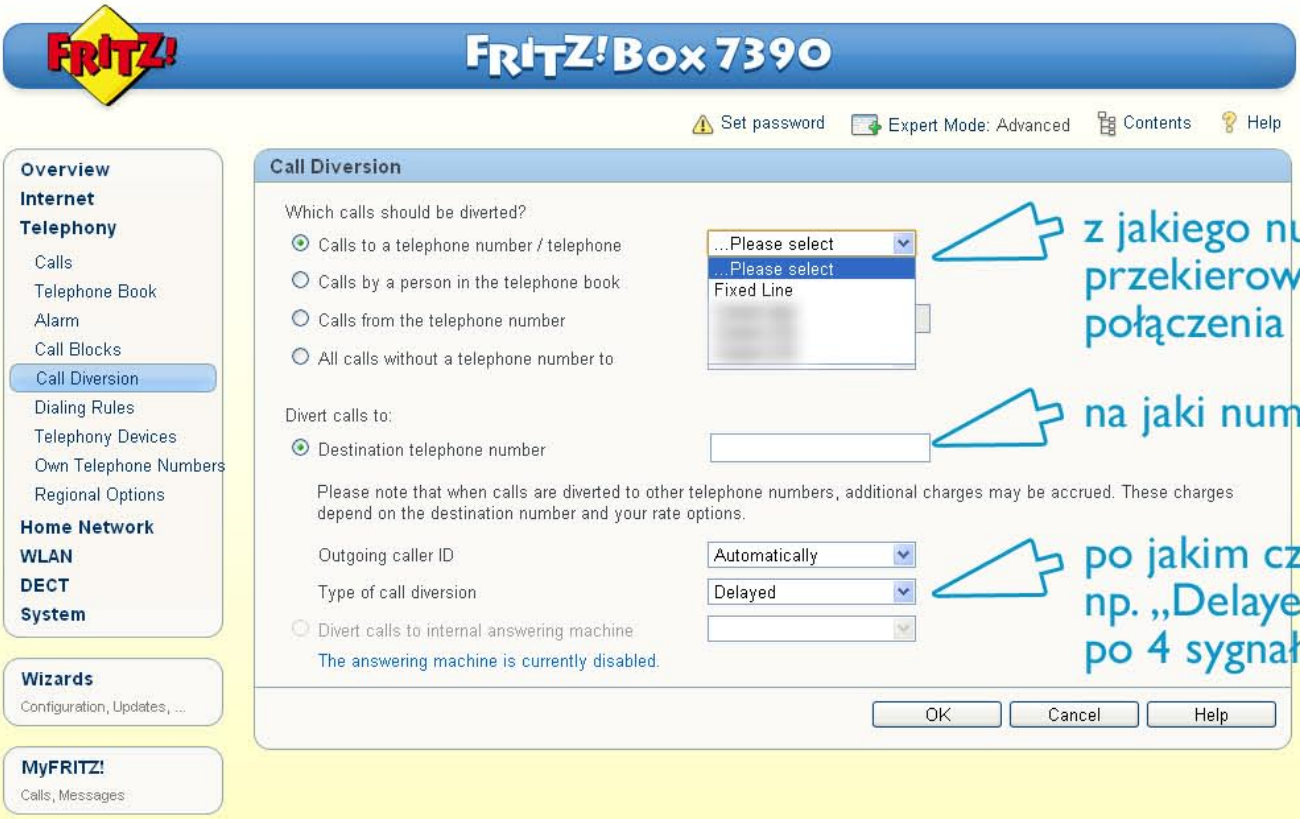
FRITZ!
FRITZ!Box 7390
Set password
Expert Mode: Advanced
Contents
Help
Overview
Internet
Telephony
Calls
Telephone Book
Alarm
Call Blocks
Call Diversion
Dialing Rules
Telephony Devices
Own Telephone Numbers
Regional Options
Home Network
WLAN
DECT
System
Wizards
Configuration, Updates, ...
MyFRITZ!
Calls, Messages

Call Diversion

Which calls should be diverted?

- ● Calls to a telephone number / telephone — ...Please select
- ○ Calls by a person in the telephone book
- ○ Calls from the telephone number
- ○ All calls without a telephone number to

...Please select
Fixed Line
[redacted]

z jakiego numeru przekierowywać połączenia

Divert calls to:

● Destination telephone number

na jaki numer

Please note that when calls are diverted to other telephone numbers, additional charges may be accrued. These charges depend on the destination number and your rate options.

Outgoing caller ID: Automatically

Type of call diversion: Delayed

○ Divert calls to internal answering machine

The answering machine is currently disabled.

OK
Cancel
Help

po jakim czasie np. „Delayed” - po 4 sygnałach

Instrukcja konfiguracji części internetowej (dostawca telekomunikacyjny / kablowy) jest załączona do przesyłki w formie papierowej.

www.4ip.pl