

# Grandstream Networks, Inc.

---

## UCM6200 Series IP PBX

### User Manual



## **COPYRIGHT**

©2016 Grandstream Networks, Inc. <http://www.grandstream.com>

All rights reserved. Information in this document is subject to change without notice. Reproduction or transmittal of the entire or any part, in any form or by any means, electronic or print, for any purpose without the express written permission of Grandstream Networks, Inc. is not permitted.

The latest electronic version of this user manual is available for download here:

<http://www.grandstream.com/support>

Grandstream is a registered trademark and Grandstream logo is trademark of Grandstream Networks, Inc. in the United States, Europe and other countries.

## **CAUTION**

Changes or modifications to this product not expressly approved by Grandstream, or operation of this product in any way other than as detailed by this User Manual, could void your manufacturer warranty.

## **WARNING**

Please do not use a different power adaptor with your devices as it may cause damage to the products and void the manufacturer warranty.



## GNU GPL INFORMATION

UCM6200 firmware contains third-party software licensed under the GNU General Public License (GPL). Grandstream uses software under the specific terms of the GPL. Please see the GNU General Public License (GPL) for the exact terms and conditions of the license.

Grandstream GNU GPL related source code can be downloaded from Grandstream web site from:  
<http://www.grandstream.com/support/faq/gnu-general-public-license/gnu-gpl-information-download>



## Table of Content

|                                     |           |
|-------------------------------------|-----------|
| <b>GNU GPL INFORMATION.....</b>     | <b>20</b> |
| <b>CHANGE LOG .....</b>             | <b>21</b> |
| Firmware Version 1.0.13.14.....     | 21        |
| Firmware Version 1.0.12.19.....     | 21        |
| Firmware Version 1.0.11.27.....     | 22        |
| Firmware Version 1.0.0.7.....       | 23        |
| <b>WELCOME .....</b>                | <b>24</b> |
| <b>PRODUCT OVERVIEW.....</b>        | <b>25</b> |
| Technical Specifications .....      | 25        |
| <b>INSTALLATION.....</b>            | <b>28</b> |
| Equipment Packaging.....            | 28        |
| Connect Your UCM6200.....           | 28        |
| <i>Connect The UCM6202</i> .....    | 28        |
| <i>Connect The UCM6204</i> .....    | 29        |
| <i>Connect The UCM6208</i> .....    | 30        |
| Safety Compliances.....             | 31        |
| Warranty .....                      | 31        |
| <b>GETTING STARTED .....</b>        | <b>32</b> |
| Use The LCD Menu .....              | 32        |
| Use The LED Indicators .....        | 34        |
| Use The Web GUI .....               | 34        |
| <i>Access Web GUI</i> .....         | 34        |
| <i>Setup Wizard</i> .....           | 36        |
| <i>Web GUI Configurations</i> ..... | 37        |
| <i>Web GUI Languages</i> .....      | 37        |
| <i>Save And Apply Changes</i> ..... | 38        |
| Make Your First Call .....          | 38        |
| <b>SYSTEM SETTINGS .....</b>        | <b>39</b> |
| User Management .....               | 39        |
| <i>User Information</i> .....       | 39        |
| <i>Custom Privilege</i> .....       | 41        |
| <i>User Portal</i> .....            | 43        |





|   |           |
|---|-----------|
| <i>Concurrent Multi-User Login</i> .....              | 45        |
| <i>Operation Log</i> .....                            | 45        |
| <i>Change Password</i> .....                          | 47        |
| <i>Change binding Email</i> .....                     | 48        |
| Network Settings .....                                | 49        |
| <i>Basic Settings</i> .....                           | 49        |
| <i>DHCP Client List</i> .....                         | 55        |
| <i>802.1X</i> .....                                   | 56        |
| <i>Static Routes</i> .....                            | 58        |
| <i>Port Forwarding</i> .....                          | 60        |
| <i>OpenVPN</i> .....                                  | 62        |
| <i>DDNS Settings</i> .....                            | 63        |
| Firewall .....  | 65        |
| <i>Static Defense</i> .....                           | 65        |
| <i>Dynamic Defense</i> .....                          | 68        |
| <i>Fail2ban</i> .....                                 | 69        |
| LDAP Server.....                                      | 70        |
| <i>LDAP Server Configurations</i> .....               | 70        |
| <i>LDAP Phonebook</i> .....                           | 72        |
| <i>LDAP Client Configurations</i> .....               | 75        |
| HTTP Server.....                                      | 77        |
| Email settings .....                                  | 78        |
| <i>Email settings</i> .....                           | 78        |
| <i>Email Templates</i> .....                          | 79        |
| <i>Email Send Log</i> .....                           | 80        |
| Time settings .....                                   | 81        |
| <i>Auto time updating</i> .....                       | 81        |
| <i>Set Time Manually</i> .....                        | 83        |
| <i>Office Time</i> .....                              | 83        |
| <i>Holiday</i> .....                                  | 85        |
| NTP Server.....                                       | 87        |
| Recordings Storage.....                               | 87        |
| Login Settings.....                                   | 89        |
| Google Service Settings Support.....                  | 90        |
| <b>PROVISIONING .....</b>                             | <b>93</b> |
| Overview.....   | 93        |
| Configuration Architecture for End Point Device ..... | 93        |
| Auto Provisioning Settings.....                       | 94        |
| Discovery.....  | 97        |
| Global configuration.....                             | 98        |



|   |            |
|---|------------|
| <i>Global policy</i> .....                | 98         |
| <i>Global Templates</i> .....             | 106        |
| Model configuration .....                 | 108        |
| <i>Model templates</i> .....              | 108        |
| <i>Model Update</i> .....                 | 110        |
| Device Configuration .....                | 111        |
| <i>Create New Device</i> .....            | 111        |
| <i>Manage Devices</i> .....               | 112        |
| Sample Application .....                  | 119        |
| <b>EXTENSIONS.....</b>                    | <b>124</b> |
| Create new user .....                     | 124        |
| <i>Create new SIP extension</i> .....     | 124        |
| <i>Create New IAX Extension</i> .....     | 130        |
| <i>Create New FXS Extension</i> .....     | 134        |
| Batch Add Extensions.....                 | 139        |
| <i>Batch Add SIP Extensions</i> .....     | 139        |
| <i>Batch Add IAX Extensions</i> .....     | 142        |
| Search and Edit Extension .....           | 144        |
| Export Extensions.....                    | 145        |
| Import Extensions.....                    | 145        |
| Email to User .....                       | 153        |
| Multiple Registrations Per Extension..... | 156        |
| SMS message support .....                 | 157        |
| <b>TRUNKS.....</b>                        | <b>158</b> |
| Analog Trunks.....                        | 158        |
| <i>Analog Trunk Configuration</i> .....   | 158        |
| <i>PSTN Detection</i> .....               | 161        |
| VOIP Trunks .....                         | 164        |
| <i>Direct Outward Dialing (DOD)</i> ..... | 174        |
| <b>SLA STATION .....</b>                  | <b>177</b> |
| Create/Edit SLA Station.....              | 177        |
| Sample Configuration .....                | 178        |
| <b>CALL ROUTES .....</b>                  | <b>180</b> |
| Outbound Routes .....                     | 180        |
| <i>Outbound Routes</i> .....              | 180        |
| <i>Outbound Blacklist</i> .....           | 182        |
| Inbound Routes .....                      | 183        |



|  |            |
|--|------------|
| <i>Inbound Rule Configurations</i> .....             | 183        |
| <i>Inbound Route: Prepend Example</i> .....          | 185        |
| <i>Inbound Route: Multiple Mode</i> .....            | 186        |
| <i>FAX Intelligent Route</i> .....                   | 187        |
| <i>FAX with Two Media</i> .....                      | 188        |
| <i>Blacklist Configurations</i> .....                | 188        |
| <b>CONFERENCE BRIDGE</b> .....                       | <b>190</b> |
| <i>Conference Bridge Configurations</i> .....        | 190        |
| <i>Join A Conference Call</i> .....                  | 192        |
| <i>Invite Other Parties to Join Conference</i> ..... | 192        |
| <i>During The Conference</i> .....                   | 193        |
| <i>Record Conference</i> .....                       | 195        |
| <b>CONFERENCE SCHEDULE</b> .....                     | <b>196</b> |
| Conference Schedule Configuration .....              | 196        |
| <b>IVR</b> .....                                     | <b>200</b> |
| Configure IVR .....                                  | 200        |
| Black/White List in IVR .....                        | 202        |
| Create Custom Prompt .....                           | 203        |
| <b>LANGUAGE SETTINGS FOR VOICE PROMPT</b> .....      | <b>204</b> |
| Download and Install Voice Prompt Package .....      | 204        |
| Customize Specific Prompt .....                      | 206        |
| <b>VOICEMAIL</b> .....                               | <b>207</b> |
| Configure Voicemail .....                            | 207        |
| Access Voicemail .....                               | 208        |
| Voicemail Email Settings .....                       | 209        |
| Configure Voicemail Group .....                      | 210        |
| <b>RING GROUP</b> .....                              | <b>212</b> |
| Configure Ring Group .....                           | 212        |
| Remote Extension in Ring Group .....                 | 214        |
| <b>PAGING AND INTERCOM GROUP</b> .....               | <b>217</b> |
| Configure Paging/Intercom Group .....                | 217        |
| <b>CALL QUEUE</b> .....                              | <b>219</b> |
| Configure Call Queue .....                           | 219        |



|  |            |
|--|------------|
| <b>EXTENSION GROUPS.....</b>                               | <b>223</b> |
| Configure Extension Groups .....                           | 223        |
| Using Extension Groups.....                                | 223        |
| <b>PICKUP GROUPS.....</b>                                  | <b>225</b> |
| Configure Pickup Groups .....                              | 225        |
| Configure Pickup Feature Code .....                        | 225        |
| <b>MUSIC ON HOLD.....</b>                                  | <b>227</b> |
| <b>FAX/T.38.....</b>                                       | <b>230</b> |
| Configure Fax/T.38 .....                                   | 230        |
| Sample Configuration to Receive Fax from PSTN Line .....   | 231        |
| Sample Configuration for Fax-To-Email .....                | 234        |
| <b>ASTERISK MANAGER INTERFACE (RESTRICTED ACCESS).....</b> | <b>236</b> |
| <b>BUSY CAMP-ON.....</b>                                   | <b>237</b> |
| <b>FOLLOW ME.....</b>                                      | <b>238</b> |
| <b>SPEED DIAL .....</b>                                    | <b>241</b> |
| <b>DISA.....</b>   | <b>242</b> |
| <b>CALLBACK FEATURE .....</b>                              | <b>244</b> |
| <b>BLF AND EVENT LIST.....</b>                             | <b>246</b> |
| BLF .....  | 246        |
| Event List.....  | 246        |
| <b>DIAL BY NAME.....</b>                                   | <b>249</b> |
| Dial by Name Configuration.....                            | 249        |
| <b>WAKEUP SERVICE .....</b>                                | <b>253</b> |
| WakeUp Service using admin login.....                      | 253        |
| WakeUp service from User portal.....                       | 254        |
| WakeUp service using feature code.....                     | 254        |
| <b>ACTIVE CALLS AND MONITOR .....</b>                      | <b>255</b> |



|   |            |
|---|------------|
| Active Calls Status.....                | 255        |
| Hang Up Active Calls.....               | 256        |
| Call Monitor .....                      | 256        |
| <b>CALL FEATURES .....</b>              | <b>258</b> |
| Feature Codes.....                      | 258        |
| Call Recording.....                     | 263        |
| Call Park .....                         | 263        |
| <i>Park A Call</i> .....                | 263        |
| <i>Retrieve The Parked Call</i> .....   | 264        |
| Enable Spy .....                        | 264        |
| <b>INTERNAL OPTIONS.....</b>            | <b>265</b> |
| Internal Options/General .....          | 265        |
| Internal Options/Custom Prompt.....     | 267        |
| <i>Record New Custom Prompt</i> .....   | 267        |
| <i>Upload Custom Prompt</i> .....       | 268        |
| <i>Download All Custom Prompt</i> ..... | 268        |
| Internal Options/Jitter Buffer.....     | 269        |
| Internal Options/RTP Settings.....      | 269        |
| Internal Options/Payload .....          | 270        |
| Internal Options/PIN Groups .....       | 270        |
| <b>IAX SETTINGS.....</b>                | <b>273</b> |
| IAX Settings/General .....              | 273        |
| IAX Settings/Registration.....          | 273        |
| IAX Settings/Static Defense .....       | 274        |
| <b>SIP SETTINGS .....</b>               | <b>275</b> |
| SIP Settings/General .....              | 275        |
| SIP Settings/MISC.....                  | 275        |
| SIP Settings/Session Timer .....        | 276        |
| SIP Settings/TCP and TLS .....          | 276        |
| SIP Settings/NAT .....                  | 277        |
| SIP Settings/TOS.....                   | 277        |
| <b>PORTS CONFIG .....</b>               | <b>280</b> |
| <b>VALUE-ADDED FEATURES .....</b>       | <b>282</b> |
| FAX Sending.....                        | 282        |
| Announcements Center.....               | 282        |



|  |            |
|--|------------|
| <i>Announcements Center Settings</i> ..... | 283        |
| <i>Group Settings</i> .....                | 284        |
| <b>PMS</b> .....                           | <b>286</b> |
| Basic Settings .....                       | 286        |
| Room Status .....                          | 287        |
| Wake Up Service .....                      | 288        |
| Mini Bar .....                             | 290        |
| <b>CRM</b> .....                           | <b>293</b> |
| SugarCRM .....                             | 293        |
| Salesforce CRM .....                       | 294        |
| <b>STATUS AND REPORTING</b> .....          | <b>297</b> |
| PBX Status .....                           | 297        |
| <i>Trunks</i> .....                        | 297        |
| <i>Extensions</i> .....                    | 298        |
| <i>Queues</i> .....                        | 299        |
| <i>Conference Rooms</i> .....              | 300        |
| <i>Interfaces Status</i> .....             | 301        |
| <i>Parking Lot</i> .....                   | 302        |
| System Status .....                        | 303        |
| <i>General</i> .....                       | 303        |
| <i>Network</i> .....                       | 303        |
| <i>Storage Usage</i> .....                 | 304        |
| <i>Resource Usage</i> .....                | 305        |
| System Events .....                        | 306        |
| <i>Alert Events List</i> .....             | 306        |
| <i>Alert Log</i> .....                     | 308        |
| <i>Alert Contact</i> .....                 | 310        |
| CDR .....                                  | 310        |
| <i>CDR Improvement</i> .....               | 314        |
| <i>Downloaded CDR File</i> .....           | 315        |
| <i>Statistics</i> .....                    | 316        |
| <i>Recording Files</i> .....               | 317        |
| <i>API Configuration</i> .....             | 318        |
| <b>UPGRADING AND MAINTENANCE</b> .....     | <b>320</b> |
| Upgrading .....                            | 320        |
| <i>Upgrading Via Network</i> .....         | 320        |
| <i>Upgrading Via Local Upload</i> .....    | 321        |



|   |            |
|---|------------|
| <i>No Local Firmware Servers</i> .....              | 323        |
| Backup .....  | 323        |
| <i>Backup/Restore</i> .....                         | 323        |
| <i>Data Sync</i> .....                              | 326        |
| <i>Restore Configuration from Backup File</i> ..... | 327        |
| Cleaner .....                                       | 327        |
| <i>Cleaner</i> .....                                | 327        |
| <i>USB/SD Card Files Cleanup</i> .....              | 329        |
| Reset and Reboot.....                               | 330        |
| Syslog.....   | 330        |
| Troubleshooting .....                               | 331        |
| <i>Ethernet Capture</i> .....                       | 331        |
| <i>IP Ping</i> .....                                | 332        |
| <i>Traceroute</i> .....                             | 332        |
| <i>Analog Record Trace</i> .....                    | 333        |
| <i>Service Check</i> .....                          | 334        |
| <i>Network Status</i> .....                         | 335        |
| Remote Access.....                                  | 335        |
| <i>SSH Access</i> .....                             | 335        |
| <b>EXPERIENCING THE UCM6200 SERIES IP PBX .....</b> | <b>337</b> |



## Table of Tables

|  |     |
|--|-----|
| Table 1: Technical Specifications .....                                | 25  |
| Table 2: UCM6200 Equipment Packaging .....                             | 28  |
| Table 3: LCD Menu Options .....  | 33  |
| Table 4: UCM6202/UCM6204 LED Indicators .....                          | 34  |
| Table 5: UCM6208 LED Indicators.....                                   | 34  |
| Table 6: User Management->Create New User.....                         | 40  |
| Table 7: Operation Log Column Header .....                             | 46  |
| Table 8: Change Binding Email option .....                             | 49  |
| Table 9: UCM6200 Network Settings->Basic Settings.....                 | 49  |
| Table 10: UCM6200 Network Settings->802.1X .....                       | 57  |
| Table 11: UCM6200 Network Settings->Static Routes .....                | 58  |
| Table 12: UCM6200 Network Settings->Port Forwarding.....               | 60  |
| Table 13: UCM6200 Settings -> Network Settings -> Open VPN.....        | 62  |
| Table 14: UCM6200 Firewall->Static Defense->Current Service.....       | 66  |
| Table 15: Typical Firewall Settings .....                              | 66  |
| Table 16: Firewall Rule Settings.....                                  | 67  |
| Table 17: UCM6200 Firewall Dynamic Defense .....                       | 68  |
| Table 18: Fail2Ban Settings .....                                      | 69  |
| Table 19: HTTP Server Settings.....                                    | 77  |
| Table 20: Email Settings.....  | 78  |
| Table 21: Email Log.....   | 81  |
| Table 22: Time Auto Updating .....                                     | 82  |
| Table 23: Create New Office Time .....                                 | 84  |
| Table 24: Create New Holiday.....                                      | 85  |
| Table 25: Auto Provision Settings .....                                | 96  |
| Table 26: Global Policy Parameters->Localization .....                 | 99  |
| Table 27: Global Policy Parameters->Phone Settings.....                | 100 |
| Table 28: Global Policy Parameters->Contact List .....                 | 101 |
| Table 29: Global Policy Parameters->Maintenance.....                   | 103 |
| Table 30: Global Policy Parameters->Network Settings .....             | 104 |
| Table 31: Global Policy Parameters->Customization.....                 | 105 |
| Table 32: Create New Template .....                                    | 106 |
| Table 33: Create New Model Template .....                              | 108 |
| Table 34: SIP Extension Configuration Parameters->Basic Settings ..... | 125 |
| Table 35: SIP Extension Configuration Parameters->Media.....           | 126 |
| Table 36: SIP Extension Configuration Parameters->Features .....       | 127 |
| Table 37: SIP Extension Configuration Parameters->Specific Time.....   | 130 |
| Table 38: IAX Extension Configuration Parameters->Basic Settings ..... | 130 |





|  |     |
|--|-----|
| Table 39: IAX Extension Configuration Parameters->Media .....          | 131 |
| Table 40: IAX Extension Configuration Parameters->Features .....       | 132 |
| Table 41: IAX Extension Configuration Parameters->Specific Time.....   | 134 |
| Table 42: FXS Extension Configuration Parameters->Basic Settings ..... | 134 |
| Table 43: FXS Extension Configuration Parameters->Media .....          | 135 |
| Table 44: FXS Extension Configuration Parameters->Features.....        | 136 |
| Table 45: FXS Extension Configuration Parameters->Specific Time.....   | 139 |
| Table 46: Batch Add SIP Extension Parameters.....                      | 139 |
| Table 47: Batch Add IAX Extension Parameters.....                      | 142 |
| Table 48: SIP extensions Imported File Example .....                   | 146 |
| Table 49: IAX extensions Imported File Example .....                   | 149 |
| Table 50: FXS extensions Imported File Example .....                   | 151 |
| Table 51: Analog Trunk Configuration Parameters .....                  | 158 |
| Table 52: PSTN Detection for Analog Trunk .....                        | 163 |
| Table 53: Create New SIP Trunk.....                                    | 165 |
| Table 54: SIP Register Trunk Configuration Parameters .....            | 166 |
| Table 55: SIP Peer Trunk Configuration Parameters .....                | 169 |
| Table 56: Create New IAX Trunk.....                                    | 172 |
| Table 57: IAX Register Trunk Configuration Parameters .....            | 172 |
| Table 58: IAX Peer Trunk Configuration Parameters.....                 | 173 |
| Table 59: SLA Station Configuration Parameters .....                   | 177 |
| Table 60: Outbound Route Configuration Parameters.....                 | 180 |
| Table 61: Inbound Rule Configuration Parameters.....                   | 183 |
| Table 62: Conference Bridge Configuration Parameters .....             | 190 |
| Table 63: Conference Settings.....                                     | 191 |
| Table 64: Conference Caller IVR Menu .....                             | 194 |
| Table 65: Conference Schedule Parameters .....                         | 196 |
| Table 66: IVR Configuration Parameters .....                           | 200 |
| Table 67: Voicemail Settings .....                                     | 207 |
| Table 68: Voicemail IVR Menu .....                                     | 208 |
| Table 69: Voicemail Email Settings .....                               | 209 |
| Table 70: Voicemail Group Settings .....                               | 211 |
| Table 71: Ring Group Parameters .....                                  | 212 |
| Table 72: Paging/Intercom Group Configuration Parameters .....         | 217 |
| Table 73: Call Queue Configuration Parameters .....                    | 219 |
| Table 74: FAX/T.38 Settings .....                                      | 230 |
| Table 75: Follow Me Settings .....                                     | 239 |
| Table 76: Follow Me Options.....                                       | 240 |
| Table 77: DISA Settings .....  | 242 |
| Table 78: Callback Configuration Parameters.....                       | 244 |
| Table 79: Event List Settings.....                                     | 246 |



|   |     |
|---|-----|
| Table 80: Wakeup Service .....                  | 253 |
| Table 81: UCM6200 Feature Codes .....           | 258 |
| Table 82: Internal Options/General .....        | 265 |
| Table 83: Internal Options/Jitter Buffer.....   | 269 |
| Table 84: Internal Options/RTP Settings .....   | 269 |
| Table 85: Internal Options/Payload .....        | 270 |
| Table 86: Internal Options/PIN Group .....      | 271 |
| Table 87: IAX Settings/General .....            | 273 |
| Table 88: IAX Settings/Registration .....       | 273 |
| Table 89: IAX Settings/Static Defense .....     | 274 |
| Table 90: SIP Settings/General .....            | 275 |
| Table 91: SIP Settings/Misc .....               | 275 |
| Table 92: SIP Settings/Session Timer .....      | 276 |
| Table 93: SIP Settings/TCP and TLS .....        | 276 |
| Table 94: SIP Settings/NAT .....                | 277 |
| Table 95: SIP Settings/ToS.....                 | 277 |
| Table 96: Internal Options/Ports Config .....   | 280 |
| Table 97: Announcements Center Settings .....   | 283 |
| Table 98: Group Settings.....                   | 284 |
| Table 99: PMS Supported Features .....          | 286 |
| Table 100: PMS Basic Settings .....             | 287 |
| Table 101: PMS Wake up Service.....             | 289 |
| Table 102: Create New Mini Bar .....            | 290 |
| Table 103: Create New Maid.....                 | 291 |
| Table 104: SugarCRM Settings.....               | 293 |
| Table 105: Salesforce Settings.....             | 295 |
| Table 106: Trunk Status .....                   | 297 |
| Table 107: Extension Status.....                | 298 |
| Table 108: Agent Status .....                   | 300 |
| Table 109: Interface Status Indicators.....     | 301 |
| Table 110: Parking Lot Status .....             | 302 |
| Table 111: System Status->General.....          | 303 |
| Table 112: System Status->Network .....         | 303 |
| Table 113: CDR Filter Criteria .....            | 310 |
| Table 114: CDR Statistics Filter Criteria ..... | 317 |
| Table 115: API Configuration Files .....        | 318 |
| Table 116: Network Upgrade Configuration .....  | 321 |
| Table 117: Data Sync Configuration.....         | 326 |
| Table 118: Cleaner Configuration.....           | 328 |
| Table 119: USB/SD Card files Cleanup.....       | 329 |
| Table 120: Ethernet Capture .....               | 331 |



## Table of Figures

|  |    |
|--|----|
| Figure 1: UCM6202 Front View.....                                | 28 |
| Figure 2: UCM6202 Back View.....                                 | 29 |
| Figure 3: UCM6204 Front View.....                                | 29 |
| Figure 4: UCM6204 Back View.....                                 | 30 |
| Figure 5: UCM6208 Front View.....                                | 31 |
| Figure 6: UCM6208 Back View.....                                 | 31 |
| Figure 7: UCM6204 Web GUI Login Page.....                        | 35 |
| Figure 8: UCM6200 Setup Wizard.....                              | 36 |
| Figure 9: UCM6200 Web GUI Language.....                          | 37 |
| Figure 10: User Management Page Display.....                     | 39 |
| Figure 11: Create New User.....                                  | 40 |
| Figure 12: User Management – New Users.....                      | 41 |
| Figure 13: General User.....                                     | 42 |
| Figure 14: Create New custom Privilege.....                      | 43 |
| Figure 15: Edit User Information by Super Admin.....             | 44 |
| Figure 16: User Portal Login.....                                | 44 |
| Figure 17: User Portal Layout.....                               | 45 |
| Figure 18: Multiple User Operation Error Prompt.....             | 45 |
| Figure 19: Operation Logs.....                                   | 46 |
| Figure 20: Operation Logs Filter.....                            | 47 |
| Figure 21 : Change Password.....                                 | 48 |
| Figure 22: Change Binding Email.....                             | 48 |
| Figure 23: UCM6200 Network Interface Method: Route.....          | 53 |
| Figure 24: UCM6200 Network Interface Method: Switch.....         | 54 |
| Figure 25: UCM6200 Network Interface Method: Dual.....           | 55 |
| Figure 26: DHCP Client List.....                                 | 55 |
| Figure 27: Add MAC Address Bind.....                             | 56 |
| Figure 28: Batch Add MAC Address Bind.....                       | 56 |
| Figure 29: UCM6200 Using 802.1X as Client.....                   | 57 |
| Figure 30: UCM6200 Using 802.1X EAP-MD5.....                     | 57 |
| Figure 31: UCM6204 Static Route Sample.....                      | 59 |
| Figure 32: UCM6204 Static Route Configuration.....               | 60 |
| Figure 33: Create New Port Forwarding.....                       | 61 |
| Figure 34: UCM6200 Port Forwarding Configuration.....            | 62 |
| Figure 35: GXP2160 Web Access Using UCM6202 Port Forwarding..... | 62 |
| Figure 36: Open VPN feature on the UCM6200.....                  | 63 |
| Figure 37: Register Domain Name on noip.com.....                 | 64 |
| Figure 38: UCM6200 DDNS Setting.....                             | 64 |



|  |     |
|--|-----|
| Figure 39: Using Domain Name to Connect to UCM6200 .....                     | 65  |
| Figure 40: Create New Firewall Rule .....                                    | 67  |
| Figure 41: Configure Dynamic Defense .....                                   | 69  |
| Figure 42: LDAP Server Configurations .....                                  | 71  |
| Figure 43: Default LDAP Phonebook DN .....                                   | 71  |
| Figure 44: Default LDAP Phonebook Attributes .....                           | 72  |
| Figure 45: LDAP Server->LDAP Phonebook .....                                 | 72  |
| Figure 46: Add LDAP Phonebook .....  | 73  |
| Figure 47: Edit LDAP Phonebook .....   | 73  |
| Figure 48: Import Phonebook.....   | 74  |
| Figure 49: Phonebook CSV File Format .....                                   | 74  |
| Figure 50: LDAP Phonebook After Import.....                                  | 75  |
| Figure 51: Export Selected LDAP Phonebook.....                               | 75  |
| Figure 52: LDAP Client Configurations .....                                  | 76  |
| Figure 53: GXP2200 LDAP Phonebook Configuration .....                        | 77  |
| Figure 54: UCM6200 Email Settings.....                                       | 79  |
| Figure 55: Email Templates.....  | 79  |
| Figure 56: Conference Schedule Template.....                                 | 80  |
| Figure 57: Email Send log.....   | 80  |
| Figure 58: Email Logs .....  | 81  |
| Figure 59: Set Time Manually .....   | 83  |
| Figure 60: Create New Office Time.....                                       | 84  |
| Figure 61: Settings->Time Settings->Office Time .....                        | 85  |
| Figure 62: Create New Holiday .....  | 85  |
| Figure 63: Settings->Time Settings->Holiday .....                            | 86  |
| Figure 64: Settings->Recordings Storage.....                                 | 87  |
| Figure 65: Recordings Storage Prompt Information .....                       | 88  |
| Figure 66: Recording Storage Category .....                                  | 88  |
| Figure 67: Login Timeout Settings .....                                      | 89  |
| Figure 68: Google Service Settings->OAuth2.0 Authentication .....            | 90  |
| Figure 69: Google Service->New Project .....                                 | 91  |
| Figure 70: Google Service->Create New Credential .....                       | 91  |
| Figure 71: Google Service->OAuth2.0 Login.....                               | 92  |
| Figure 72: Zero Config Configuration Architecture for End Point Device ..... | 94  |
| Figure 73: UCM6200 Zero Config .....   | 95  |
| Figure 74: Auto Provision Settings .....                                     | 96  |
| Figure 75: Auto Discover.....  | 98  |
| Figure 76: Discovered Devices .....  | 98  |
| Figure 77: Global Policy Categories .....                                    | 99  |
| Figure 78: Edit Global Template.....   | 107 |
| Figure 79: Edit Model Template .....   | 109 |



|   |     |
|---|-----|
| Figure 80: Template Management .....                          | 110 |
| Figure 81: Upload Model Template Manually.....                | 111 |
| Figure 82: Create New Device .....                            | 112 |
| Figure 83: Manage Devices .....                               | 112 |
| Figure 84: Edit Device.....                                   | 113 |
| Figure 85: Edit Customize Device Settings.....                | 115 |
| Figure 86: Add P Value in Customize Device Settings .....     | 116 |
| Figure 87: Modify Selected Devices - Same Model.....          | 117 |
| Figure 88: Modify Selected Devices - Different Models.....    | 118 |
| Figure 89: Device List in Zero Config.....                    | 119 |
| Figure 90: Zero Config Sample - Global Policy.....            | 120 |
| Figure 91: Zero Config Sample - Device Preview 1.....         | 121 |
| Figure 92: Zero Config Sample - Device Preview 2.....         | 122 |
| Figure 93: Zero Config Sample - Device Preview 3.....         | 123 |
| Figure 94: Create New Device .....                            | 124 |
| Figure 95: Manage Extensions .....                            | 144 |
| Figure 96: Export Extensions .....                            | 145 |
| Figure 97: Import Extensions .....                            | 146 |
| Figure 98: Import File.....                                   | 146 |
| Figure 99: Import Error.....                                  | 153 |
| Figure 100: Auto Record Empty.....                            | 153 |
| Figure 101: Email To User - Prompt Information.....           | 154 |
| Figure 102: Account Registration Information and QR Code..... | 154 |
| Figure 103: LDAP Client Information and QR Code .....         | 155 |
| Figure 104: Multiple Registrations per Extension .....        | 156 |
| Figure 105: Extension - Concurrent Registration.....          | 156 |
| Figure 106: SMS Message Support.....                          | 157 |
| Figure 107: UCM6200 FXO Tone Settings .....                   | 161 |
| Figure 108: UCM6200 PSTN Detection.....                       | 162 |
| Figure 109: UCM6200 PSTN Detection: Auto Detect.....          | 162 |
| Figure 110: UCM6200 PSTN Detection: Semi-Auto Detect.....     | 163 |
| Figure 111: DOD extension selection.....                      | 175 |
| Figure 112: Edit DOD .....                                    | 176 |
| Figure 113: SLA Station .....                                 | 177 |
| Figure 114: Enable SLA Mode for Analog Trunk.....             | 178 |
| Figure 115: Analog Trunk with SLA Mode Enabled.....           | 178 |
| Figure 116: SLA Example - SLA Station .....                   | 179 |
| Figure 117: SLA Example - MPK Configuration .....             | 179 |
| Figure 118: Country Codes .....                               | 183 |
| Figure 119: Inbound Route feature: Prepend.....               | 186 |
| Figure 120: Inbound Route - Multiple Mode.....                | 187 |



|  |     |
|--|-----|
| Figure 121: Blacklist Configuration Parameters.....                    | 188 |
| Figure 122: Blacklist csv File.....                                    | 189 |
| Figure 123: Conference .....   | 192 |
| Figure 124: Conference Invitation From Web GUI.....                    | 193 |
| Figure 125: Conference Recording.....                                  | 195 |
| Figure 126: Conference Schedule .....                                  | 198 |
| Figure 127: Black/White List .....                                     | 202 |
| Figure 128: Click on Prompt to Create IVR Prompt.....                  | 203 |
| Figure 129: Language Settings for Voice Prompt .....                   | 204 |
| Figure 130: Voice Prompt Package List.....                             | 205 |
| Figure 131: New Voice Prompt Language Added .....                      | 205 |
| Figure 132: Upload Single Voice Prompt for Entire Language Pack .....  | 206 |
| Figure 133: Voicemail Email Settings .....                             | 210 |
| Figure 134: Voicemail Group.....                                       | 211 |
| Figure 135: Ring Group.....  | 212 |
| Figure 136: Ring Group Configuration .....                             | 214 |
| Figure 137: Sync LDAP Server option .....                              | 215 |
| Figure 138: Manually Sync LDAP Server .....                            | 215 |
| Figure 139: Ring Group Remote Extension .....                          | 216 |
| Figure 140: Paging/Intercom Group.....                                 | 217 |
| Figure 141: Page/Intercom Group Settings .....                         | 218 |
| Figure 142: Call Queue .....   | 219 |
| Figure 143: Agent Login Settings .....                                 | 222 |
| Figure 144: Edit Extension Group.....                                  | 223 |
| Figure 145: Select Extension Group in Outbound Route.....              | 224 |
| Figure 146: Edit Pickup Group .....                                    | 225 |
| Figure 147: Edit Pickup Feature Code.....                              | 226 |
| Figure 148: Music On Hold Default Class .....                          | 227 |
| Figure 149: Play Custom Prompt.....                                    | 228 |
| Figure 150: Information Prompt .....                                   | 229 |
| Figure 151: Record Custom Prompt .....                                 | 229 |
| Figure 152: Configure Analog Trunk without Fax Detection .....         | 232 |
| Figure 153: Configure Extension for Fax Machine: FXS Extension .....   | 232 |
| Figure 154: Configure Extension for Fax Machine: Analog Settings ..... | 233 |
| Figure 155: Configure Inbound Rule for Fax.....                        | 233 |
| Figure 156: Create Fax Extension .....                                 | 234 |
| Figure 157: Inbound Route to Fax Extension .....                       | 235 |
| Figure 158: Create Follow Me.....                                      | 238 |
| Figure 159: Edit Follow Me .....                                       | 238 |
| Figure 160: Configure Speed Dial.....                                  | 241 |
| Figure 161: Speed Dial Destinations .....                              | 241 |



|  |     |
|--|-----|
| Figure 162: Create New DISA.....                                     | 242 |
| Figure 163: Create New Event List.....                               | 247 |
| Figure 164: Create Dial By Name Group.....                           | 249 |
| Figure 165: Configure Extension First Name and Last Name.....        | 250 |
| Figure 166: Dial By Name Group In IVR Key Pressing Events.....       | 251 |
| Figure 167: Dial By Name Group In Inbound Rule.....                  | 252 |
| Figure 168: Create New Wakeup Service.....                           | 253 |
| Figure 169: Status->PBX Status->Active Calls - Ringing.....          | 255 |
| Figure 170: Status->PBX Status->Active Calls – Call Established..... | 255 |
| Figure 171: Configure to Monitor an Active Call.....                 | 256 |
| Figure 172: Enable/Disable Feature codes.....                        | 262 |
| Figure 173: Download Recording File from CDR Page.....               | 263 |
| Figure 174: Download Recording File from Recording Files Page.....   | 263 |
| Figure 175: Record New Custom Prompt.....                            | 267 |
| Figure 176: Upload Custom Prompt.....                                | 268 |
| Figure 177: Download All Custom Prompt.....                          | 268 |
| Figure 178: Create New PIN Group.....                                | 271 |
| Figure 179: PIN members.....   | 271 |
| Figure 180: Outbound PIN.....  | 272 |
| Figure 181: CDR Record.....  | 272 |
| Figure 182: FXS Ports Signaling Preference.....                      | 280 |
| Figure 183: FXO Ports ACIM Settings.....                             | 280 |
| Figure 184: Fax Sending in Web UI.....                               | 282 |
| Figure 185: Announcements Center.....                                | 283 |
| Figure 186: Announcements Center Group Configuration.....            | 284 |
| Figure 187: Announcements Center Code Configuration.....             | 285 |
| Figure 188: Announcements Center Example.....                        | 285 |
| Figure 189: Create New Room.....                                     | 287 |
| Figure 190: Room Status.....   | 288 |
| Figure 191: Add batch rooms.....                                     | 288 |
| Figure 192: Create New Wake Up Service.....                          | 289 |
| Figure 193: Wakeup Call executed.....                                | 289 |
| Figure 194: Create New Mini Bar.....                                 | 290 |
| Figure 195: Create New Maid.....                                     | 291 |
| Figure 196: Create New Consumer Goods.....                           | 291 |
| Figure 197: Mini Bar.....  | 292 |
| Figure 198: SugarCRM Basic Settings.....                             | 293 |
| Figure 199: CRM User Settings.....                                   | 294 |
| Figure 200: Salesforce Basic Settings.....                           | 295 |
| Figure 201: Salesforce User Settings.....                            | 296 |
| Figure 202: Status->PBX Status.....                                  | 297 |





|  |     |
|--|-----|
| Figure 203: Trunk Status .....   | 297 |
| Figure 204: Extension Status .....   | 298 |
| Figure 205: Queue Status .....   | 300 |
| Figure 206: Conference Room Status .....   | 301 |
| Figure 207: UCM6204 Interfaces Status.....                                       | 301 |
| Figure 208: Parking Lot Status .....   | 302 |
| Figure 209: System Status->Storage Usage .....                                   | 305 |
| Figure 210: System Status->Resource Usage .....                                  | 305 |
| Figure 211: System Events->Alert Events Lists: Disk Usage .....                  | 307 |
| Figure 212: System Events->Alert Events Lists: External Disk Usage.....          | 307 |
| Figure 213: System Events->Alert Events Lists: Memory Usage .....                | 307 |
| Figure 214: System Events->Alert Events Lists: System Reboot.....                | 308 |
| Figure 215: System Events->Alert Events Lists: System Crash.....                 | 308 |
| Figure 216: System Events->Alert Log .....                                       | 309 |
| Figure 217: Filter for Alert Log .....   | 309 |
| Figure 218: CDR Filter .....   | 310 |
| Figure 219: Call Report .....  | 312 |
| Figure 220: Call Report Entry with Audio Recording File.....                     | 313 |
| Figure 221: Automatic Download Settings .....                                    | 314 |
| Figure 222: CDR Report .....   | 315 |
| Figure 223: Detailed CDR Information.....  | 315 |
| Figure 224: Downloaded CDR File Sample .....                                     | 315 |
| Figure 225: Downloaded CDR File Sample - Source Channel and Dest Channel 1 ..... | 316 |
| Figure 226: Downloaded CDR File Sample - Source Channel and Dest Channel 2.....  | 316 |
| Figure 227: CDR Statistics.....  | 317 |
| Figure 228: CDR->Recording Files.....  | 318 |
| Figure 229: Network Upgrade.....   | 320 |
| Figure 230: Local Upgrade.....   | 321 |
| Figure 231: Upgrading Firmware Files.....  | 322 |
| Figure 232: Reboot UCM6200 .....   | 322 |
| Figure 233: Create New Backup .....  | 324 |
| Figure 234: Restore Warning .....  | 324 |
| Figure 235: Backup / Restore .....   | 325 |
| Figure 236: Local Backup .....   | 325 |
| Figure 237: Data Sync .....  | 326 |
| Figure 238: Restore UCM6200 from Backup File .....                               | 327 |
| Figure 239: Cleaner .....  | 328 |
| Figure 240: USB/SD Card Files Cleanup.....                                       | 329 |
| Figure 241: Reset and Reboot.....  | 330 |
| Figure 242: Ethernet Capture.....  | 331 |
| Figure 243: Ping.....  | 332 |





|   |     |
|---|-----|
| Figure 244: Traceroute.....                     | 333 |
| Figure 245: Troubleshooting Analog Trunks ..... | 333 |
| Figure 246: A Key Dial-up FXO.....              | 334 |
| Figure 247: Service Check.....                  | 334 |
| Figure 248: Network Status.....                 | 335 |
| Figure 249: SSH Access .....                    | 336 |

## CHANGE LOG

This section documents significant changes from previous versions of the UCM6200 user manuals. Only major new features or major document updates are listed here. Minor updates for corrections or editing are not documented here.

### Firmware Version 1.0.13.14

- Added extension whitelist/blacklist for IVR dialing [Black/White List in IVR]
- Added ability to include DOD in PPI Header for SIP trunk [Use DOD in PPI]
- Added advanced IPv6 support including IPv6-to-IPv4 SIP calls, IPv6 router, IPv6 iptables/Static defense.
- Added ability to customize PAI Header [PAI Header]
- Added blacklist for outbound calls [Outbound Blacklist]
- Added support to upload/download MOH package from web UI [MUSIC ON HOLD]
- Added support to download custom prompts from web UI [Download All Custom Prompt]
- Added option to configure prompt timeout in Dial By Name [DIAL BY NAME]
- Added description field in ZeroConfig settings to configure Softkey/Line/MPK for GXP series phones [PROVISIONING]
- Improved seamless transfer privilege control [Seamless transfer privilege control]
- Added RTP Keep-alive support [RTP Keep-alive]
- Added Email Send Log [Email Send Log]
- Added support for Mitel simulation/protocol interfaces for PMS module. [PMS]
- Added support for up to 10 failover trunks. [Use Failover Trunk]

### Firmware Version 1.0.12.19

- Added support for binding a mobile phone number to extension [Mobile Phone Number]
- Added support opus codec
- Added support call-barging privilege settings based on extensions [Monitor privilege control]
- Added support for Seamless Transfer [Seamless Transfer]
- Added support for Custom Call-Info for Auto Answer [Custom Call-info for Auto Answer]
- Added support for DND Whitelist [Do Not Disturb]
- Add the Field Description on Softkey, Line keys and MPK from Zero Config
- Added support to select interval for numbers on Batch add extension [Extension Interval]
- Added support for Batch Add CallerID Number [CallerID Number]
- Added support for Search Extensions Using CallerID Name
- Added support to Enable/Disable Inbound and Outbound Route [Disable This Route/Disable This Route]
- Added support for Outbound Route Time Condition [Time Condition]
- Added support for IPv6 [IPv6 Address]
- Added Support for MTU configurable [MTU]
- Added support of CRM [CRM]
- Added support for Custom Privilege in User Management [Custom Privilege]

- Added Hotline support for FXS Extension [Hotline]
- Added support for Separate Wakeup Service [WAKEUP SERVICE]
- Added ability to provision phones from different network subnets using zero config [Subnet Whitelist]
- One-key-dial is replaced by Speed Dial to support more than one digit [SPEED DIAL]
- Added Append extension number in the end of DOD [Direct Outward Dialing (DOD)]
- Support Japan CID NTT Detect
- Added support for Ethernet Capture Auto Sync to SFTP Server [Enable SFTP Data Sync]
- Added support for Ethernet Capture saved to External Storage Device [Storage to External Device]
- Added support for Disable Extension Range on the Setup Wizard [Setup Wizard]
- Added more support for Port Forwarding [Port Forwarding]
- Added support for USB/SD Card Files Cleanup [USB/SD Card Files Cleanup]
- Added support for A Key Dial-up FXO [A key Dial-up FXO]
- Added support for ACIM Detect Option for FXO [PORTS CONFIG]
- Added support for some special character on the file name of FW [Upgrading Via Local Upload]
- Added more search criteria of CDR [CDR]
- Added support of "Allow outgoing calls if registration failure" for register trunks [Allow outgoing calls if registration failure]
- Added support for music on hold playback from webGUI [MUSIC ON HOLD]
- Added support to enable delete recording files for user privilege [Consumer]
- Added support disk Inode usage in "Storage Usage" page [Storage Usage]
- Added support for Ring Group/Call Queue/IVR Display Option for Caller ID [Replace Caller ID | Replace Caller ID | Replace Caller ID]
- Added support for compatibility between backup package from UCM61xx and UCM62xx [Backup/Restore]
- Added support to Detect talking users in conference [CONFERENCE BRIDGE]
- Added Support of Mini Bar for PMS [Mini Bar]

### **Firmware Version 1.0.11.27**

- Added ability to sort extension status on web UI [Extensions]
- Added one click enable / disable feature code [Feature Codes]
- Added Uruguay time zone support [Auto time updating]
- Added distinctive ring tone support [Configure Call Queue] / [Configure IVR] / [Create new SIP extension]
- Added special character support for SFTP client account [Data Sync]
- Added destination directory support for data sync [Data Sync]
- Added ring group music on hold [Configure Ring Group]
- Added CDR multi-email / time condition support [CDR]
- Added blacklist anonymous call block [Blacklist Configurations]
- Added ability to sort selected extension in Eventlist [Event List]
- Added Banned User list for web UI login attempts [Login Settings]
- Added Email template support [Email Templates]
- Added outbound route country restriction
- Added external disk usage alert option [Alert Events List]

- Added range IP input support for dynamic defense white list [Dynamic Defense]
- Added blacklist support for Fail2ban [Fail2ban]
- Added ability to reboot device from zero config page [Discovery]
- Added GXP1628B template for zero config [Model Update]
- Added PIN group support [Internal Options/PIN Groups]
- Added PMS support [PMS]
- Added call queue custom prompt support [Configure Call Queue]
- Added call queue retry time support [Configure Call Queue]
- Added Support for DHCP Client List [DHCP Client List]

### **Firmware Version 1.0.0.7**

- This is the initial version.



## WELCOME

Thank you for purchasing Grandstream UCM6200 series IP PBX appliance. The UCM6200 series IP PBX appliance is designed to bring enterprise-grade voice, video, data, and mobility features to small-to-medium businesses (SMBs) in an easy-to-manage fashion. This IP PBX series allows businesses to unify multiple communication technologies, such comprehensive voice, video calling, video conferencing, video surveillance, data tools and facility access management onto one common network that that can be managed and/or accessed remotely. The UCM6200 series supports a dual core 1GHz ARM Cortex™ A9 and 400Mhz VINETIC™ A8 processors, 1GB RAM and 4GB flash. The secure and reliable UCM6200 series delivers enterprise-grade features without any licensing fees, costs-per-feature or recurring fees.

---

 **Caution:**

Changes or modifications to this product not expressly approved by Grandstream, or operation of this product in any way other than as detailed by this User Manual, could void your manufacturer warranty.

 **Warning:**

Please do not use a different power adaptor with the UCM6200 as it may cause damage to the products and void the manufacturer warranty.

---

This document is subject to change without notice. The latest electronic version of this user manual is available for download here:

<http://www.grandstream.com/support>

Reproduction or transmittal of the entire or any part, in any form or by any means, electronic or print, for any purpose without the express written permission of Grandstream Networks, Inc. is not permitted.



# PRODUCT OVERVIEW

## Technical Specifications

Table 1: Technical Specifications

| Interfaces                              |  |
|---|--|
| Analog Telephone FXS Ports              | 2 ports (both with lifeline capability in case of power outage)  |
| PSTN Line FXO Ports                     | <ul style="list-style-type: none"> <li>• UCM6202: 2 ports</li> <li>• UCM6204: 4 ports</li> <li>• UCM6208: 8 ports</li> </ul>   |
| Network Interfaces                      | <ul style="list-style-type: none"> <li>• UCM6202/6204/6208: Dual Gigabit RJ45 ports with integrated PoE Plus (IEEE 802.3at-2009)</li> </ul>  |
| NAT Router                              | Yes  |
| Peripheral Ports                        | USB, SD  |
| LED Indicators                          | Power/Ready, Network, PSTN Line, USB, SD   |
| LCD Display                             | 128x32 graphic LCD with DOWN and OK button   |
| Reset Switch                            | Yes  |
| Voice/Video Capabilities                |  |
| Voice-over-Packet Capabilities          | LEC with NLP Packetized Voice Protocol Unit, 128ms-tail-length carrier grade Line Echo Cancellation, Dynamic Jitter Buffer, Modem detection and auto-switch to G.711                     |
| Voice and Fax Codecs                    | G.711 A-law/U-law, G.722, G.723.1 5.3K/6.3K, G.726, G.729A/B, iLBC (30ms only), GSM, AAL2-G.726-32, ADPCM; T.38  |
| Video Codecs                            | H.264, H.263, H.263+, VP8  |
| QoS                                     | Layer 3 QoS, Layer 2 QoS   |
| Signaling and Control                   |  |
| DTMF Methods                            | In Audio, RFC2833, and SIP INFO  |
| Provisioning Protocol and Plug-and-Play | TFTP/HTTP/HTTPS, auto-discovery and auto-provisioning of Grandstream IP endpoints via ZeroConfig (DHCP Option 66/multicast SIP SUBSCRIBE/mDNS), eventlist between local and remote trunk |
| Network Protocols                       | TCP/UDP/IP, RTP/RTCP, ICMP, ARP, DNS, DDNS, DHCP, NTP, TFTP, SSH, HTTP/HTTPS, PPPoE, SIP (RFC3261), STUN, SRTP, TLS, LADP  |
| Disconnect Methods                      | Call Progress Tone, Polarity Reversal, Hook Flash Timing, Loop Current Disconnect, Busy Tone   |
| Security                                |  |
| Media                                   | SRTP, TLS, HTTPS, SSH  |
| Physical                                |  |



|                               |  |
|-------------------------------|--|
| <b>Universal Power Supply</b> | <ul style="list-style-type: none"> <li>• Output: 12VDC, 1.5A</li> <li>• Input: 100-240VAC, 50-60Hz</li> </ul>  |
| <b>Dimensions</b>             | <ul style="list-style-type: none"> <li>• UCM6202/6204: 226mm (L) x 155mm (W) x 34.5mm (H)</li> <li>• UCM6208: 440mm (L) x 185mm (W) x 44mm (H)</li> </ul>  |
| <b>Environmental</b>          | <ul style="list-style-type: none"> <li>• Operating: 32 - 104°F / 0 - 40°C, 10-90% (non-condensing)</li> <li>• Storage: 14 - 140°F / -10 - 60°C</li> </ul>  |
| <b>Mounting</b>               | <ul style="list-style-type: none"> <li>• UCM6202/6204: Wall mount and Desktop</li> <li>• UCM6208: Rack mount and Desktop</li> </ul>  |
| <b>Weight</b>                 | <ul style="list-style-type: none"> <li>• UCM6202: Unit weight 0.51kg, Package weight 0.94kg</li> <li>• UCM6204: Unit weight 0.51kg, Package weight 0.94kg</li> <li>• UCM6208: Unit weight 2.23kg, Package weight 3.09kg</li> </ul> |

### Additional Features

|                                    |   |
|------------------------------------|---|
| <b>Multi-language Support</b>      | <p>English/Simplified Chinese/Traditional Chinese/Spanish/French/Portuguese/German/Russian/Italian/Polish/Czech for Web UI; Customizable IVR/voice prompts for English, Chinese, British English, German, Spanish, Greek, French, Italian, Dutch, Polish, Portuguese, Russian, Swedish, Turkish, Hebrew, Arabic;</p> <p>Customizable language pack to support any other languages</p> |
| <b>Caller ID</b>                   | Bellcore/Telcordia, ETSI-FSK, ETSI-DTMF, SIN 227 - BT   |
| <b>Polarity Reversal/ Wink</b>     | Yes, with enable/disable option upon call establishment and termination   |
| <b>Call Center</b>                 | Multiple configurable call queues, automatic call distribution (ACD) based on agent skills/availability busy level, in-queue announcement   |
| <b>Customizable Auto Attendant</b> | Up to 5 layers of IVR (Interactive Voice Response)  |
| <b>Maximum Call Capacity</b>       | <ul style="list-style-type: none"> <li>• UCM6202: Concurrent audio calls up to 30, concurrent WebRTC calls up to 25</li> <li>• UCM6204: Concurrent audio calls up to 45, concurrent WebRTC calls up to 35</li> <li>• UCM6208: Concurrent audio calls up to 100, concurrent WebRTC calls up to 50.</li> </ul> <p>Or up to 66% performance if calls are SRTP encrypted</p>              |
| <b>SIP Devices</b>                 | <ul style="list-style-type: none"> <li>• UCM6202/6204 up to 500 registered SIP endpoints.</li> <li>• UCM6208 up to 800 registered SIP endpoints.</li> </ul>   |
| <b>Conference Bridges</b>          | <ul style="list-style-type: none"> <li>• UCM6202/6204: Up to 3 password-protected conference bridges allowing up to 25 simultaneous PSTN or IP participants</li> <li>• UCM6208: Up to 6 password-protected conference bridges allowing up to 32 simultaneous PSTN or IP participants</li> </ul>   |
| <b>Call Features</b>               | Call park, call forward, call transfer, DND, ring/hunt group, paging/intercom and etc   |



**Compliance**

- FCC: Part 15 (CFR 47) Class B, Part 68
- CE: EN55022 Class B, EN55024, EN61000-3-2, EN61000-3-3, EN60950-1, TBR21, RoHS
- A-TICK: AS/NZS CISPR 22 Class B, AS/NZS CISPR 24, AS/NZS 60950, AS/ACIF S002 and ITU-T K.21 (Basic Level)
- UL 60950 (power adapter)

**Note:**

- UCM6200 FXS ports lifeline functionality:  
The UCM6200 FXS interfaces are metallic through to the FXO interfaces. If there is power outage, FXS1 port will fail over to FXO 1 port, FXS 2 port will fail over to FXO 2 port. The user can still access the PSTN connected with the FXO interfaces from FXS interfaces.
- 





## INSTALLATION

Before deploying and configuring the UCM6200 series, the device needs to be properly powered up and connected to network. This section describes detailed information on installation, connection and warranty policy of the UCM6200 series.

### Equipment Packaging

Table 2: UCM6200 Equipment Packaging

|                                 |         |
|---------------------------------|---------|
| <b>Main Case</b>                | Yes (1) |
| <b>Power Adaptor</b>            | Yes (1) |
| <b>Ethernet Cable</b>           | Yes (1) |
| <b>Quick Installation Guide</b> | Yes (1) |
| <b>GPL License</b>              | Yes (1) |

### Connect Your UCM6200

#### Connect The UCM6202

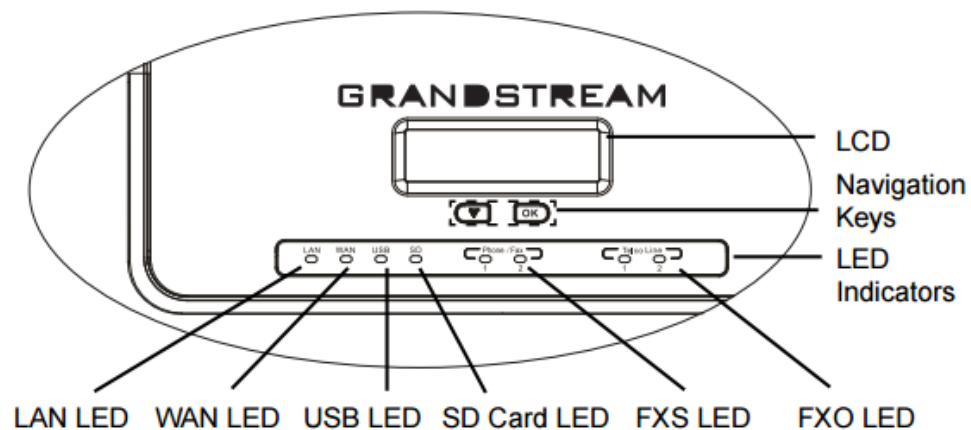


Figure 1: UCM6202 Front View



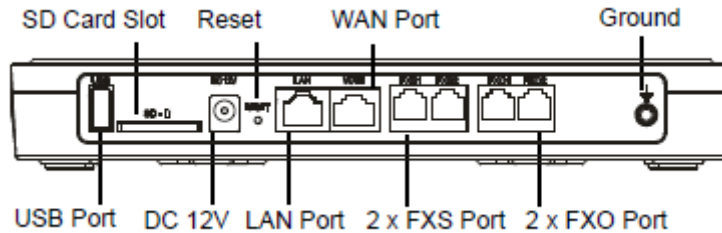


Figure 2: UCM6202 Back View

To set up the UCM6202, follow the steps below:

1. Connect one end of an RJ-45 Ethernet cable into the WAN port of the UCM6202.
2. Connect the other end of the Ethernet cable into the uplink port of an Ethernet switch/hub.
3. Connect the 12V DC power adapter into the 12V DC power jack on the back of the UCM6202. Insert the main plug of the power adapter into a surge-protected power outlet.
4. Wait for the UCM6202 to boot up. The LCD in the front will show the device hardware information when the boot process is done.
5. Once the UCM6202 is successfully connected to network, the LED indicator for WAN in the front will be solid green and the LCD shows up the IP address.
6. (Optional) Connect PSTN lines from the wall jack to the FXO ports; connect analog lines (phone and Fax) to the FXS ports.

## Connect The UCM6204


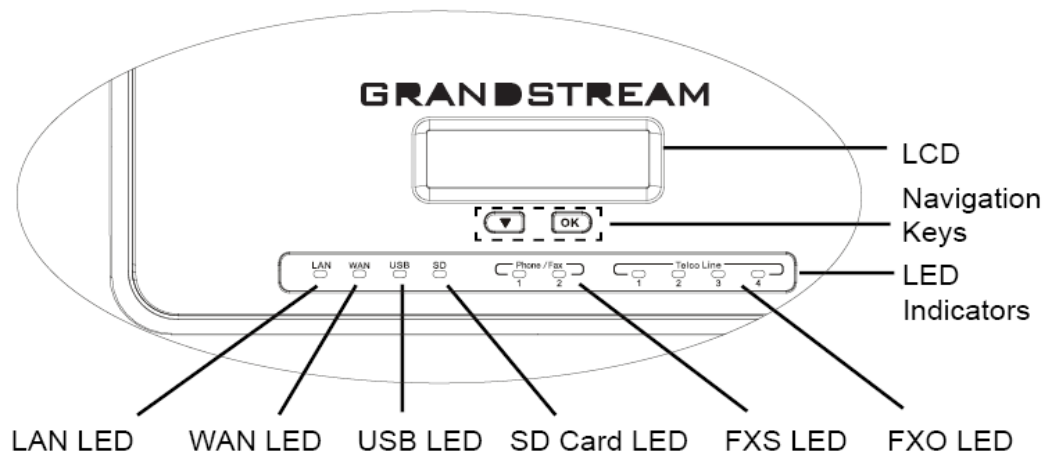


Figure 3: UCM6204 Front View



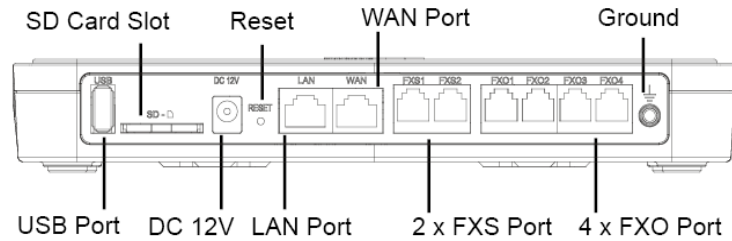

**Figure 4: UCM6204 Back View**

To set up the UCM6204, follow the steps below:

1. Connect one end of an RJ-45 Ethernet cable into the WAN port of the UCM6204.
2. Connect the other end of the Ethernet cable into the uplink port of an Ethernet switch/hub.
3. Connect the 12V DC power adapter into the 12V DC power jack on the back of the UCM6204. Insert the main plug of the power adapter into a surge-protected power outlet.
4. Wait for the UCM6204 to boot up. The LCD in the front will show the device hardware information when the boot process is done.
5. Once the UCM6204 is successfully connected to network, the LED indicator for WAN in the front will be in solid green and the LCD shows up the IP address.
6. (Optional) Connect PSTN lines from the wall jack to the FXO ports; connect analog lines (phone and Fax) to the FXS ports.

### **Connect The UCM6208**

To set up the UCM6208, follow the steps below:

1. Connect one end of an RJ-45 Ethernet cable into the WAN port of the UCM6208.
2. Connect the other end of the Ethernet cable into the uplink port of an Ethernet switch/hub.
3. Connect the 12V DC power adapter into the 12V DC power jack on the back of the UCM6208. Insert the main plug of the power adapter into a surge-protected power outlet.
4. Wait for the UCM6208 to boot up. The LCD in the front will show the device hardware information when the boot process is done.
5. Once the UCM6208 is successfully connected to network, the LED indicator for NETWORK in the front will be in solid green and the LCD shows up the IP address.
6. (Optional) Connect PSTN lines from the wall jack to the FXO ports; connect analog lines (phone and Fax) to the FXS ports.



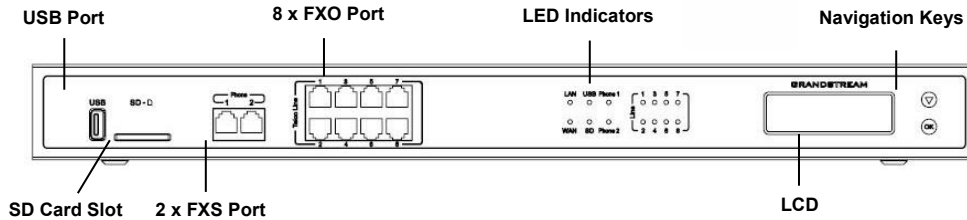


Figure 5: UCM6208 Front View

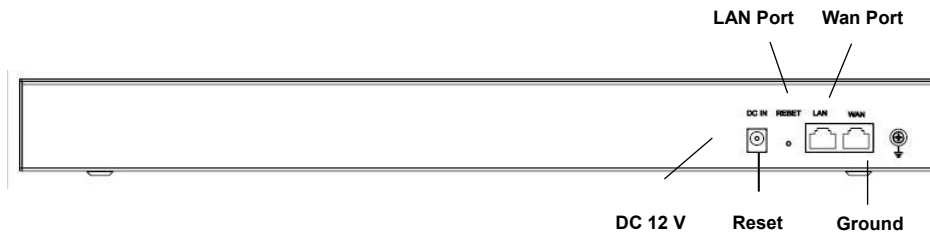


Figure 6: UCM6208 Back View

## Safety Compliances

The UCM6200 series IP PBX complies with FCC/CE and various safety standards. The UCM6200 power adapter is compliant with the UL standard. Use the universal power adapter provided with the UCM6200 package only. The manufacturer's warranty does not cover damages to the device caused by unsupported power adapters.

## Warranty

If the UCM6200 series IP PBX was purchased from a reseller, please contact the company where the device was purchased for replacement, repair or refund. If the device was purchased directly from Grandstream, contact our Technical Support Team for a RMA (Return Materials Authorization) number before the product is returned. Grandstream reserves the right to remedy warranty policy without prior notification.

---

### **Warning:**

Use the power adapter provided with the UCM6200 series IP PBX. Do not use a different power adapter as this may damage the device. This type of damage is not covered under warranty.

---



## GETTING STARTED

The UCM6200 series provides LCD interface, LED indication and web GUI configuration interface.

- The LCD displays hardware, software and network information. Users could also navigate in the LCD menu for device information and basic network configuration.
- The LED indication at the front of the device provides interface connection and activity status.
- The web GUI gives users access to all the configurations and options for UCM6200 series setup.

This section provides step-by-step instructions on how to use the LCD menu, LED indicators and Web GUI of the UCM6200 series. Once the basic settings are done, users could start making calls from UCM6200 extension registered on a SIP phone as described at the end of this section.

### Use The LCD Menu

- **Default LCD Display**

When the device is powered up, the LCD will show device model (e.g., UCM6204), hardware version (e.g., V1.0A) and IP address. Press "Down" button and the system time will be displayed as well.

- **Menu Access**

Press "OK" button to start browsing menu options. Please see menu options in [

Table 3: LCD Menu Options].

- **Menu Navigation**

Press the "Down" arrow key to browser different menu options. Press the "OK" button to select an entry.

- **Exit**

If "Back" option is available in the menu, select it to go back to the previous menu. For "Device Info" "Network Info" and "Web Info" which do not have "Back" option, simply press the "OK" button to go back to the previous menu. Also, the LCD will display default idle screen after staying in menu option for 15 seconds.

- **LCD Backlight**

The LCD backlight will be on upon key pressing. The backlight will go off after the LCD stays in idle for 30 seconds.



Table 3: LCD Menu Options

|                     |   |
|---------------------|---|
| <b>View Events</b>  | <ul style="list-style-type: none"> <li>• <b>Critical Events</b></li> <li>• <b>Other Events</b></li> </ul>   |
| <b>Device Info</b>  | <ul style="list-style-type: none"> <li>• <b>Hardware:</b> Hardware version number</li> <li>• <b>Software:</b> Software version number</li> <li>• <b>P/N:</b> Part number</li> <li>• <b>WAN MAC:</b> WAN side MAC address</li> <li>• <b>LAN MAC:</b> LAN side MAC address</li> <li>• <b>Uptime:</b> System up time</li> </ul>  |
| <b>Network Info</b> | <ul style="list-style-type: none"> <li>• <b>WAN Mode:</b> DHCP, Static IP, or PPPoE</li> <li>• <b>WAN IP:</b> IP address</li> <li>• <b>WAN Subnet Mask</b></li> <li>• <b>LAN IP:</b> IP address</li> <li>• <b>LAN Subnet Mask</b></li> </ul>  |
| <b>Network Menu</b> | <ul style="list-style-type: none"> <li>• <b>WAN Mode:</b> Select WAN mode as DHCP, Static IP or PPPoE</li> <li>• <b>Static Route Reset:</b> Click to reset the static route setting</li> </ul>  |
| <b>Factory Menu</b> | <ul style="list-style-type: none"> <li>• <b>Reboot</b></li> <li>• <b>Factory Reset</b></li> <li>• <b>LCD Test Patterns</b><br/>Press "OK" to start. Then press "Down" button to test different LCD patterns. When done, press "OK" button to exit.</li> <li>• <b>Fan Mode</b><br/>Select "Auto" or "On".</li> <li>• <b>LED Test Patterns</b><br/>Select "All On" "All Off" or "Blinking" and check LED status.</li> <li>• <b>RTC Test Patterns</b><br/>Select "2022-02-22 22:22" or "2011-01-11 11:11" to start the RTC (Real-Time Clock) test pattern. Then check the system time from LCD idle screen by pressing "DOWN" button, or from web GUI-&gt;<b>System Status</b>-&gt;<b>General</b> page. Reboot the device manually after the RTC test is done.</li> <li>• <b>Hardware Testing</b><br/>Select "Test SVIP" to perform SVIP test on the device. This is mainly for</li> </ul> |



|                   |  |
|-------------------|--|
|                   | factory testing purpose which verifies the hardware connection inside the device. The diagnostic result will display in the LCD after the test is done.  |
| <b>Web Info</b>   | <ul style="list-style-type: none"> <li>• <b>Protocol:</b> Web access protocol. HTTP or HTTPS. By default, it's HTTPS</li> <li>• <b>Port:</b> Web access port number. By default it's 8089</li> </ul> |
| <b>SSH Switch</b> | <ul style="list-style-type: none"> <li>• <b>Enable SSH:</b> Enable SSH access.</li> <li>• <b>Disable SSH:</b> Disable SSH access.</li> </ul> <p>By default the SSH access is disabled.</p>           |

## Use The LED Indicators

The UCM6200 has LED indicators in the front to display connection status. The following table shows the status definitions.

Table 4: UCM6202/UCM6204 LED Indicators









| LED Indicator    | LED Status   |
|------------------|--|
| LAN              |  |
| WAN              |  |
| USB              |  <b>Solid:</b> Connected            |
| SD               |  <b>Flashing:</b> Data Transferring |
| FXS (Phone/Fax)  |  <b>OFF:</b> Not Connected         |
| FXO (Telco Line) |  |

Table 5: UCM6208 LED Indicators


| LED         | LED Status   |
|-------------|--|
| NETWORK     |  <b>Solid:</b> Connected<br> <b>OFF:</b> Not Connected |
| ACT         |  |
| USB         |  <b>Solid:</b> Connected  |
| SD          |  <b>Flashing:</b> Data Transferring   |
| Phone (FXS) |  <b>OFF:</b> Not Connected  |
| Line (FXO)  |  |

## Use The Web GUI

### Access Web GUI

The UCM6200 embedded Web server responds to HTTP/HTTPS GET/POST requests. Embedded HTML pages allow users to configure the device through a Web browser such as Microsoft IE, Mozilla Firefox, Google Chrome and etc.



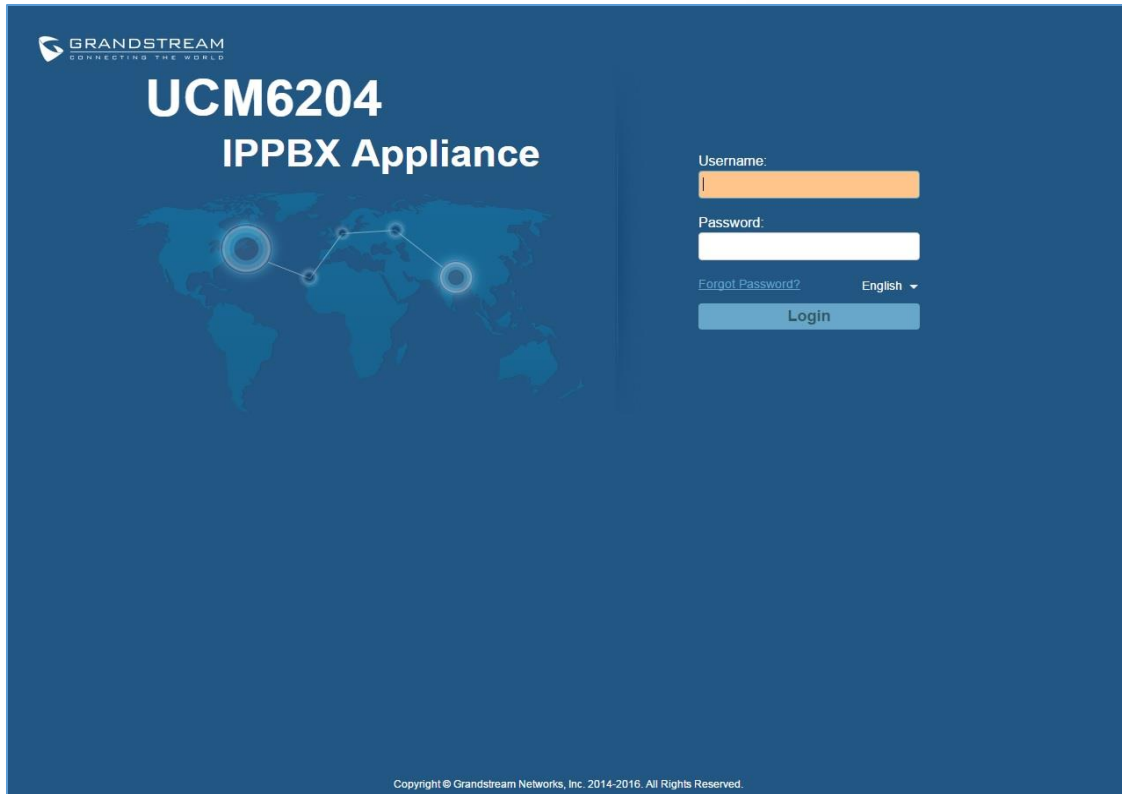

**Figure 7: UCM6204 Web GUI Login Page**

To access the Web GUI:

1. Connect the computer to the same network as the UCM6200.
2. Ensure the device is properly powered up and shows its IP address on the LCD.
3. Open a Web browser on the computer and enter the web GUI URL in the following format:

***http(s)://IP-Address:Port***

where the ***IP-Address*** is the IP address displayed on the UCM6200 LCD.

By default, the protocol is HTTPS and the Port number is 8089.

For example, if the LCD shows 192.168.40.167, please enter the following in your web browser:

***https://192.168.40.167:8089***

4. Enter the administrator's login and password to access the Web Configuration Menu. The default administrator's username and password is "admin" and "admin". It is highly recommended to change the default password after login for the first time.





 **Note:**


By default, the UCM6200 has "Redirect From Port 80" enabled. Therefore, if users type in the UCM6200 IP address in the web browser, the web page will be automatically redirected to the page using HTTPS and port 8089. For example, if the LCD shows 192.168.40.167, please enter 192.168.40.167 in your web browser and the web page will be redirected to:

https://192.168.40.167:8089

The option "Redirect From Port 80" can be configured under the UCM6200 web GUI->**Settings->HTTP Server**.

## Setup Wizard

When the user logs in the UCM6200 web UI for the first time, a setup wizard will guide the user to set up basic configuration. Configurations in setup wizard includes: **Time zone, Change password, Network settings, Extensions, Trunk and routes**.

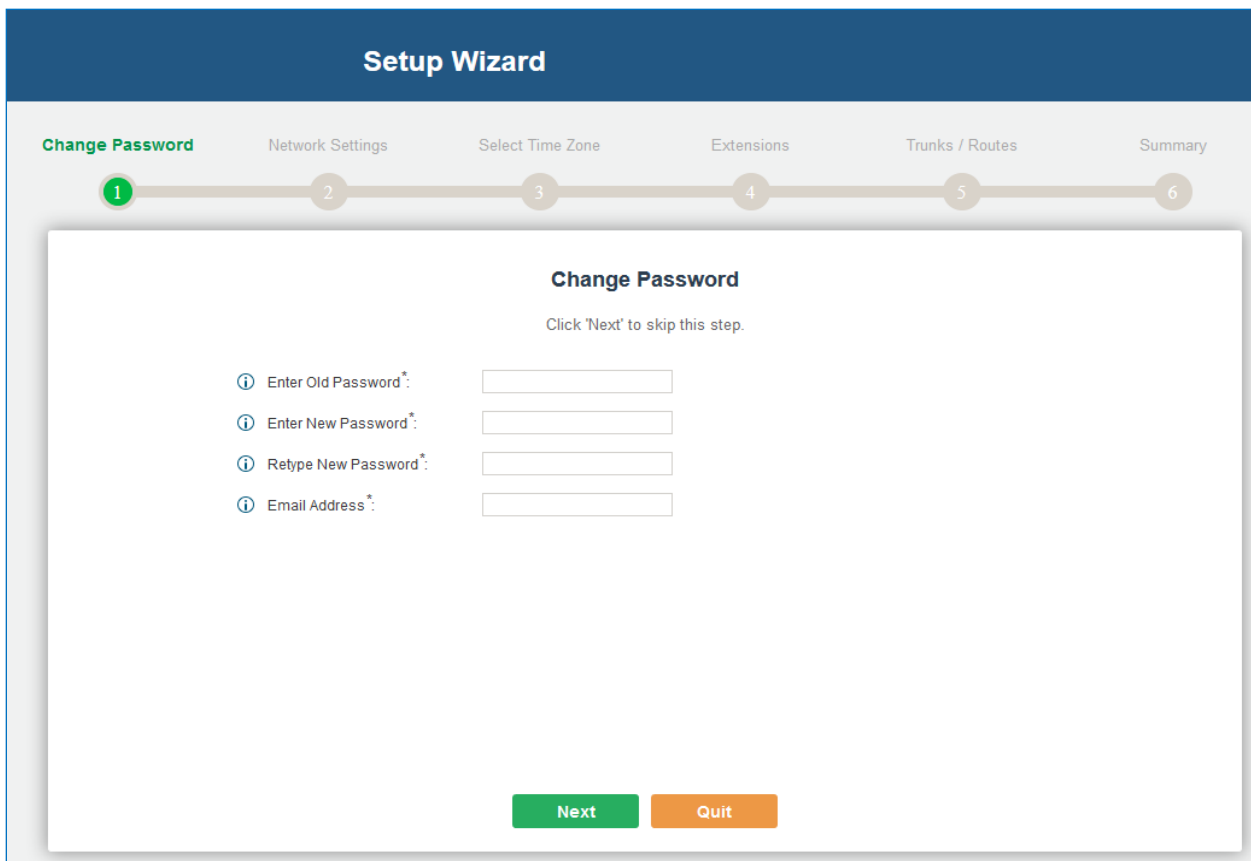

**Figure 8: UCM6200 Setup Wizard**

Users can disable the Extension Range during configuration on the Extensions.



During the wizard, the user can quit the setup wizard at any time to start over with manual configuration. At the last step of the wizard, the user will be provided with summary for review, before the configuration is loaded. Once the setup is completed, the system is ready to go.

## Web GUI Configurations

There are four main sections in the Web GUI for users to view the PBX status, configure and manage the PBX.

- **Status:** Displays PBX status, System Status, System Events and CDR.
- **PBX:** To configure extensions, trunks, call routes, zero config for auto provisioning, call features, internal options, IAX settings and SIP settings.
- **Settings:** To configure user management, network settings, firewall settings, change password, LDAP Server, HTTP Server, Email Settings, Time Settings, NTP server, recording storage and login timeout.
- **Maintenance:** To perform firmware upgrade, backup configurations, cleaner setup, reset/reboot, syslog setup and troubleshooting.

## Web GUI Languages

Currently the UCM6200 series web GUI supports **English, Simplified Chinese, Traditional Chinese, Spanish, French, Portuguese, Russian, Italian, Polish, German and etc.**

Users can select the displayed language in web GUI login page, or at the upper right of the web GUI after logging in.



Figure 9: UCM6200 Web GUI Language



## Save And Apply Changes

Click on "Save" button after configuring the web GUI options in one page. After saving all the changes, make sure click on "Apply Changes" button on the upper right of the web page to submit all the changes. If the change requires reboot to take effect, a prompted message will pop up for you to reboot the device.

## Make Your First Call

Power up the UCM6200 and your SIP end point phone. Connect both devices to the network. Then follow the steps below to make your first call.


1. Log in the UCM6200 web GUI, go to **PBX->Basic/Call Routes->Extensions**.
2. Click on "Create New SIP Extension" to create a new extension. You will need User ID, Password and Voicemail Password information to register and use the extension later.
3. Register the extension on your phone with the SIP User ID, SIP server and SIP Password information. The SIP server address is the UCM6200 IP address.
4. When your phone is registered with the extension, dial \*97 to access the voicemail box. Enter the Voicemail Password once you hear "Password" voice prompt.
5. Once successfully logged in to the voicemail, you will be prompted with the Voice Mail Main menu.
6. You are successfully connected to the PBX system now.

## SYSTEM SETTINGS

This section explains configurations for system-wide parameters on the UCM6200. System settings are under “Settings” tag on UCM6200 web GUI. System settings include User Management, Network Settings, Firewall, Change Password, LDAP server, HTTP server, Email settings, Time Settings, NTP Server, Recordings Storage and Login Timeout settings.

### User Management

User management is on web GUI->**Settings->User Management** page. User could create multiple accounts for different administrators to log in the UCM6200 web GUI. Additionally, the system will automatically create user accounts along with creating new extensions for extension users to login to the web UI using their extension number and password. All existing user accounts for web UI login will be displayed on User Management page as shown in the following figure.

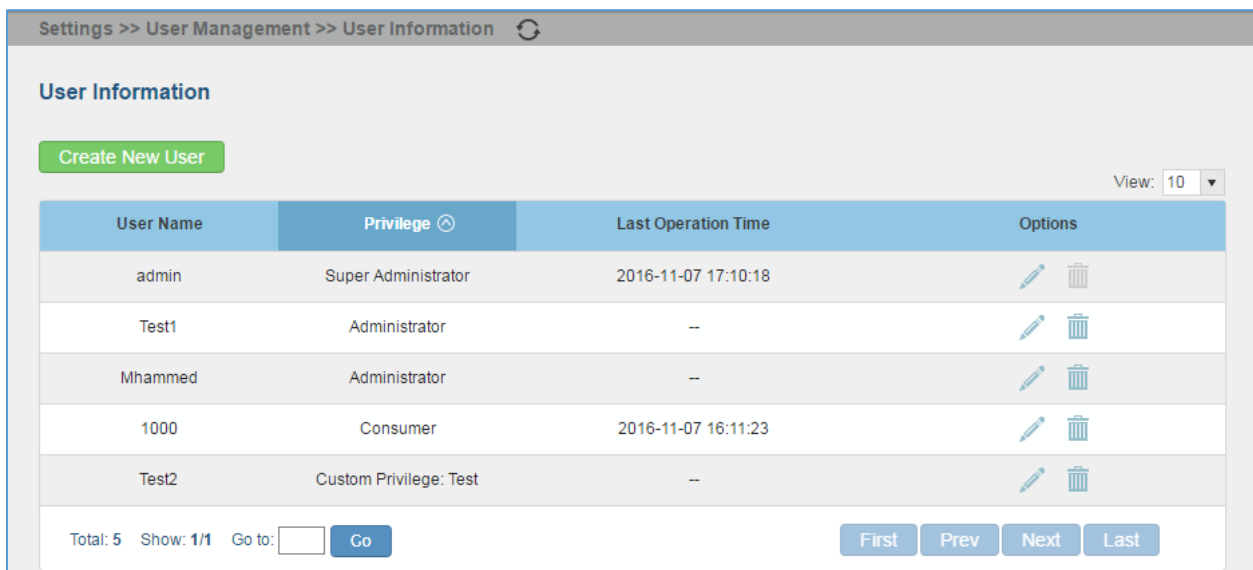

| User Name | Privilege              | Last Operation Time | Options |
|-----------|------------------------|---------------------|---------|
| admin     | Super Administrator    | 2016-11-07 17:10:18 |         |
| Test1     | Administrator          | --                  |         |
| Mhammed   | Administrator          | --                  |         |
| 1000      | Consumer               | 2016-11-07 16:11:23 |         |
| Test2     | Custom Privilege: Test | --                  |         |


Total: 5 Show: 1/1 Go to:  Go First Prev Next Last

Figure 10: User Management Page Display

### User Information

When logged in as Super Admin, click on [Create New User](#) to create a new account for web UI user. The following dialog will prompt. Configure the parameters as shown in below table.



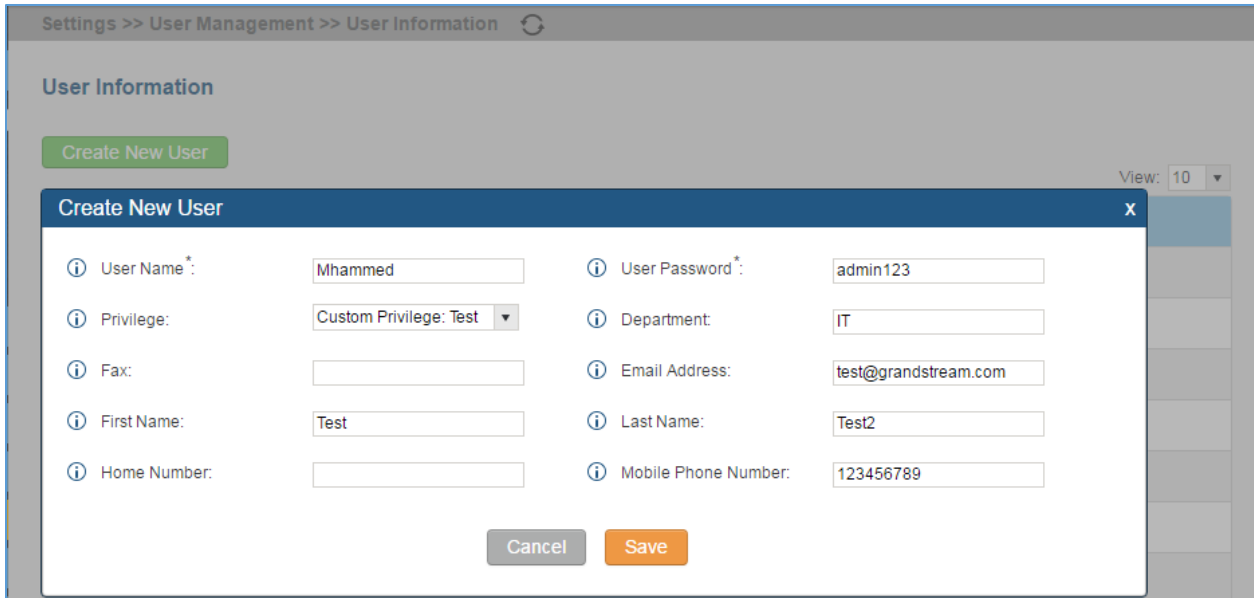






**Figure 11: Create New User**

**Table 6: User Management->Create New User**

|                      |  |
|----------------------|--|
| <b>User Name</b>     | Configure a username to identify the user which will be required in web UI login. Letters, digits and underscore are allowed in the user name. |
| <b>User Password</b> | Configure a password for this user which will be required in web UI login. Letters, digits and underscore are allowed.                         |
| <b>Privilege</b>     | This is the role of the web UI user. Currently only “Admin” is supported when Super Admin creates a new user.                                  |
| <b>Department</b>    | Enter the necessary information to keep a record for this user.  |
| <b>Fax</b>           |  |
| <b>Email Address</b> |  |
| <b>First Name</b>    |  |
| <b>Last Name</b>     |  |
| <b>Home Number</b>   |  |
| <b>Phone Number</b>  |  |

Once created, the Super Admin can edit the users by clicking on  or delete the user by clicking on .



| User Name | Privilege  | Last Operation Time | Options   |
|-----------|---|---------------------|---|
| admin     | Super Administrator   | 2016-11-07 17:12:44 |   |
| Test1     | Administrator   | --                  |   |
| Mhammed   | Administrator   | --                  |   |
| Test2     | Custom Privilege: Test  | --                  |   |

Total: 4 Show: 1/1 Go to:

Figure 12: User Management – New Users

## Custom Privilege

Four privilege levels are supported:

- **Super Administrator**

- This is the highest privilege. Super Admin can access all pages on UCM6200 web GUI, change configuration for all options and execute all the operations.
- Super Admin can create, edit and delete one or more users with “Admin” privilege
- Super Admin can edit and delete one or more users with “Consumer” privilege
- Super Admin can view operation logs generated by all users.
- By default, the user account “admin” is configured with “Super Admin” privilege and it’s the only user with “Super Admin” privilege. The User Name and Privilege level cannot be changed or deleted.
- Super Admin could change its own login password on web UI->**Settings->Change Password** page.
- Super Admin could view operations done by all the users in web UI->**Settings->User Management->Operation Log**


- **Administrator**

- Users with “Admin” privilege can only be created by “Super Admin” user.
- “Admin” privilege users are not allowed to access the following pages:  
**Maintenance->Upgrade**  
**Maintenance->Backup**  
**Maintenance->Cleaner**  
**Maintenance->Reset/Reboot**  
**Settings->User Management->Operation Log**
- “Admin” privilege users cannot create new users for login.

- **Consumer**

- A user account for web UI login is created automatically by the system when a new extension is created.
- The user could log in the web UI with the extension number and password to access user information, extension configuration and CDR of that extension.



- The SuperAdmin user can click on  on the “General\_User” in order to enable/disable the custom privilege of deleting their own recording files in user level login.

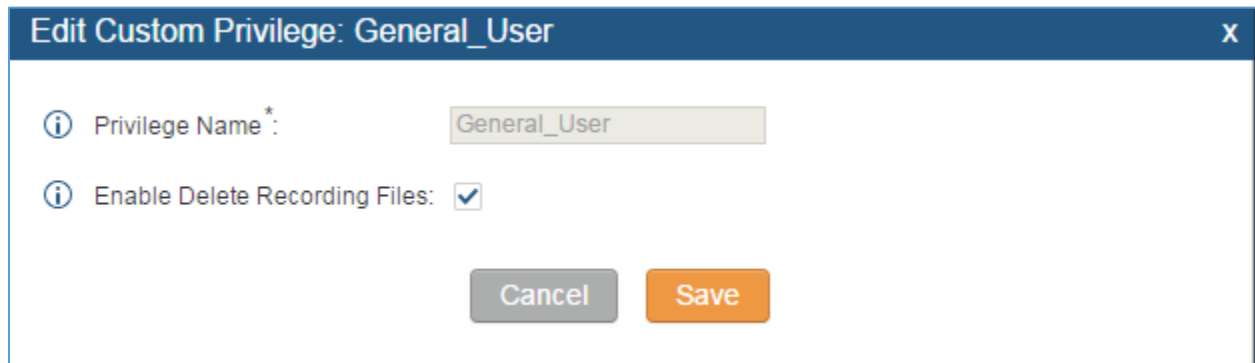



Figure 13: General User

- **Custom Privilege**

The Super Admin user can create users with different privileges. 8 modules are available for privilege customization.

- CDR API
- CDR Records
- Conference
- Conference Schedule
- System Events
- PBX Status
- System Status
- Active Calls



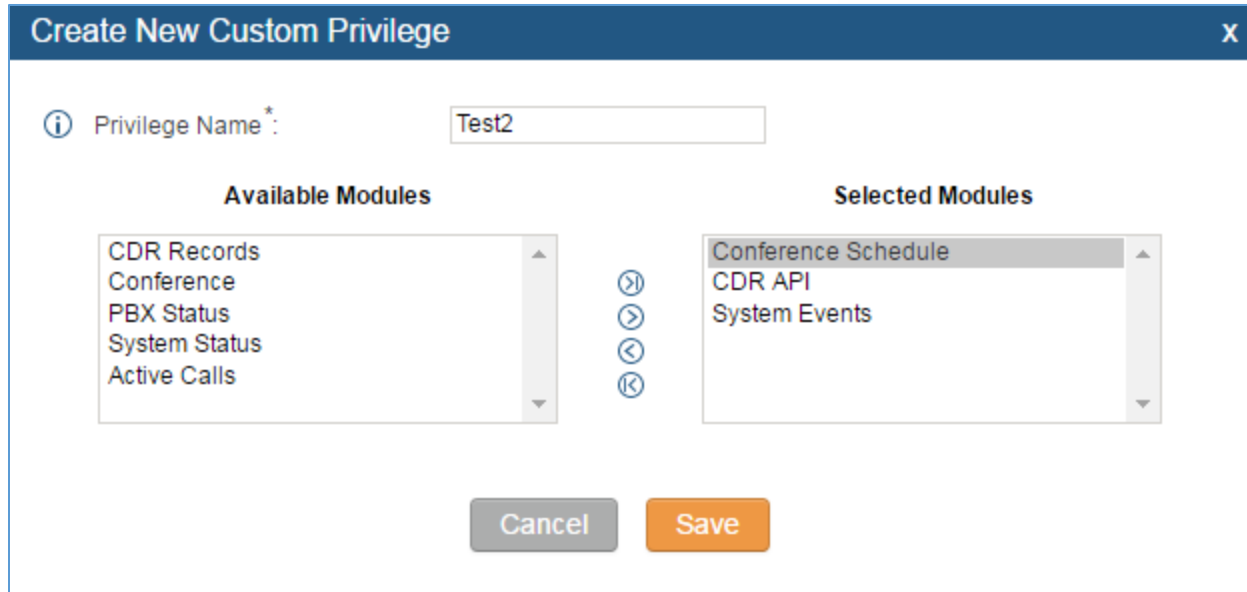

**Figure 14: Create New custom Privilege**

Log in UCM6200 as super admin and go to Settings->User Management->Custom Privilege, create privilege with customized available modules.

To assign custom privilege to a sub-admin, navigate to UCM webUI->Settings->User Management-> User Information->Create New User/Edit Users, select the custom privilege from "Privilege" option.

## User Portal

The user could log in web UI user portal using the extension number and password. When there is an extension created in the UCM6200, the corresponding user account for the extension is automatically created. The user portal allows limited access including user information, extension configuration and CDR information of the extension. The login username is the extension number and the password is configured by Super Admin. The following figure shows the dialog of editing the account information by Super Admin. The User Name must be the extension number and it's not configurable.





**Edit User Information: 1001**

|                |                                       |                  |   |
|----------------|---------------------------------------|------------------|---|
| ① User Name:   | <input type="text" value="1001"/>     | ① User Password: | <input type="text" value="AvHJL1y"/>                  |
| ① Privilege:   | <input type="text" value="Consumer"/> | ① Department:    | <input type="text" value="Support"/>                  |
| ① Fax:         | <input type="text"/>                  | ① Email Address: | <input type="text" value="1gya.tan@grandstream.com"/> |
| ① First Name:  | <input type="text" value="Jane"/>     | ① Last Name:     | <input type="text" value="Tan"/>                      |
| ① Home Number: | <input type="text"/>                  | ① Phone Number:  | <input type="text"/>                                  |

**Figure 15: Edit User Information by Super Admin**

The following figure shows an example of login page using extension number 1000 as the username.

**GRANDSTREAM**  
CONNECTING THE WORLD

# UCM6204 IPPBX Appliance

Username:

Password:

[Forgot Password?](#)    English ▾

**Figure 16: User Portal Login**

After login, the web UI displays is shown as below.



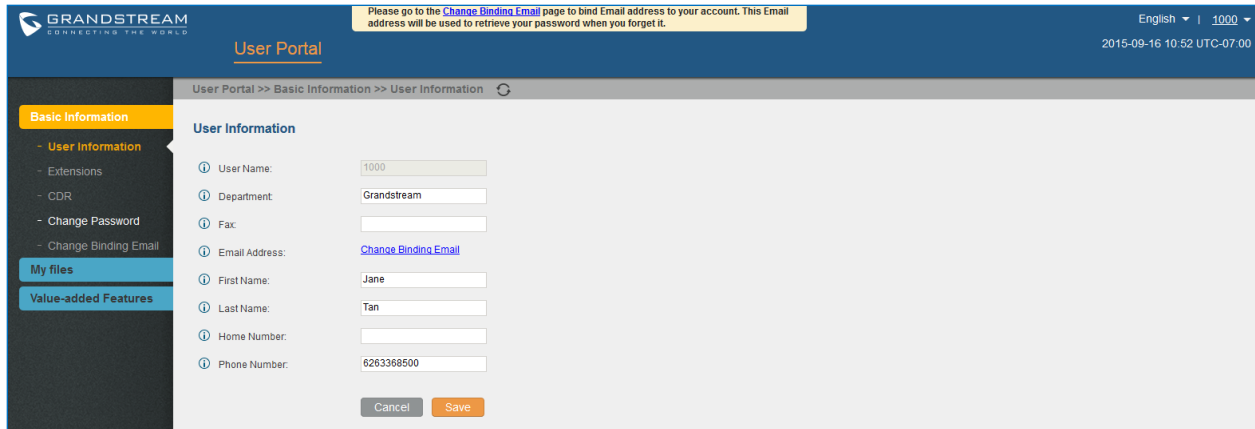


Figure 17: User Portal Layout

For the configuration parameter information in each page, please refer to **[Table 6: User Management->Create New User]** for options in **User Portal->Basic Information->User Information** page; please refer to **[EXTENSIONS]** for options in **User Portal->Basic Information->Extension** page; please refer to **[CDR]** for **User Portal->Basic Information->CDR** page.

## Concurrent Multi-User Login

When there are multiple web UI users created, concurrent multi-user login is supported on the UCM6200. Multiple users could edit options and have configurations take effect simultaneously. However, if different users are editing the same option or making the same operation (by clicking on “Apply Changes”), a prompt will pop up as shown in the following figure.

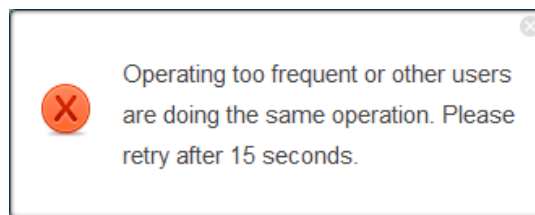


Figure 18: Multiple User Operation Error Prompt

## Operation Log

Super Admin has the authority to view operation logs on UCM6200 web GUI->**Settings->User Management->Operation Log** page. Operation logs list operations done by all the web UI users, for example, web UI login, creating trunk, creating outbound rule and etc. There are 6 columns to record the operation details “Date”, “User Name”, “IP Address”, “Results”, “Page Operation” and “Specific Operation”.



| Date                | User Name | IP Address     | Results              | Page Operation                            | Specific Operation                     |
|---------------------|-----------|----------------|----------------------|---|--|
| 2014-11-05 17:54:12 | admin     | 192.168.40.173 | Operate Successfully | Login                                     | User Name: admin.                      |
| 2014-11-05 14:57:08 | admin     | 192.168.40.173 | Operate Successfully | Login                                     | User Name: admin.                      |
| 2014-11-05 14:32:40 | admin     | 192.168.40.173 | Operate Successfully | VoIP Trunks: Create New SIP Trunk         |  |
| 2014-11-05 14:32:17 | admin     | 192.168.40.173 | Operate Successfully | Outbound Routes: Create New Outbound Rule | Privilege Level: none;                 |
| 2014-11-05 13:34:46 | admin     | 192.168.40.173 | Operate Successfully | Login                                     | User Name: admin.                      |
| 2014-11-04 21:02:42 | admin     | 192.168.40.173 | Operate Successfully | Login                                     | User Name: admin.                      |
| 2014-11-04 19:01:32 | admin     | 192.168.40.173 | Operate Successfully | Callback: Create New Callback             |  |
| 2014-11-04 19:01:13 | admin     | 192.168.40.173 | Operate Successfully | IVR: Create New IVR                       | Extension: 7000; Permission: internal; |
| 2014-11-04 18:51:38 | admin     | 192.168.40.173 | Operate Successfully | Login                                     | User Name: admin.                      |
| 2014-11-04 18:03:08 | admin     | 192.168.40.173 | Operate Successfully | Login                                     | User Name: admin.                      |

Total: 69 Show: 4/7 Go to:  Go First Prev Next Last

**Figure 19: Operation Logs**

The operation log can be sorted and filtered for easy access. Click on the header of each column to sort. For example, clicking on "Date" will sort the logs according to operation date and time. Clicking on "Date" again will reverse the order.

**Table 7: Operation Log Column Header**

|                           |  |
|---------------------------|--|
| <b>Date</b>               | The date and time when the operation is executed.  |
| <b>User Name</b>          | The username of the user who performed the operation.  |
| <b>IP Address</b>         | The IP address from which the operation is made.   |
| <b>Results</b>            | The result of the operation.   |
| <b>Page Operation</b>     | The page where the operation is made. For example, login, logout, delete user, create trunk and etc. |
| <b>Specific Operation</b> | Click on  to view the options and values configured by this operation.                               |

User could also filter the operation logs by time condition, IP address and/or username. Configure these conditions and then click on [View Operation Logs](#).



**Operation Log**

From Date:

To Date:

IP Address:

User Name:

View: 10 ▾

| Date                | User Name | IP Address     | Results              | Page Operation | Specific Operation  |
|---------------------|-----------|----------------|----------------------|----------------|---------------------|
| 2014-11-06 13:49:41 | support   | 192.168.40.173 | Operate Successfully | Login          | User Name: support. |
| 2014-11-06 13:50:01 | support   | 192.168.40.173 | Operate Successfully | Logout         | User Name: support. |
| 2014-11-06 15:02:25 | support   | 192.168.40.173 | Operate Successfully | Login          | User Name: support. |
| 2014-11-06 15:23:10 | support   | 192.168.40.173 | Operate Successfully | Logout         | User Name: support. |

Total: 4 Show: 1/1 Go to:

**Figure 20: Operation Logs Filter**

The above figure shows an example that operations made by user “support” on device with IP 192.168.40.173 from 2014-11-01 00:00 to 2014-11-06 15:38 are filtered out and displayed.


To delete operation logs, users can perform filtering first and then click on  to delete the filtered result of operation logs. Or users can click on  to delete all operation logs at once.

## Change Password

After logging in the UCM6200 web UI for the first time, it is highly recommended for users to change the default password "admin" to a more complicated password for security purpose. Follow the steps below to change the Web UI access password.

1. Go to Web UI->**Settings**->**User Management**-> **Change Password** page.
2. Enter the old password first.
3. Enter the new password and re-type the new password to confirm. The new password has to be at least 4 characters. The maximum length of the password is 30 characters.
4. Configure the Email Address that is used when login credential is lost.
5. Click on "Save" and the user will be automatically logged out.
6. Once the web page comes back to the login page again, enter the username "admin" and the new password to login.



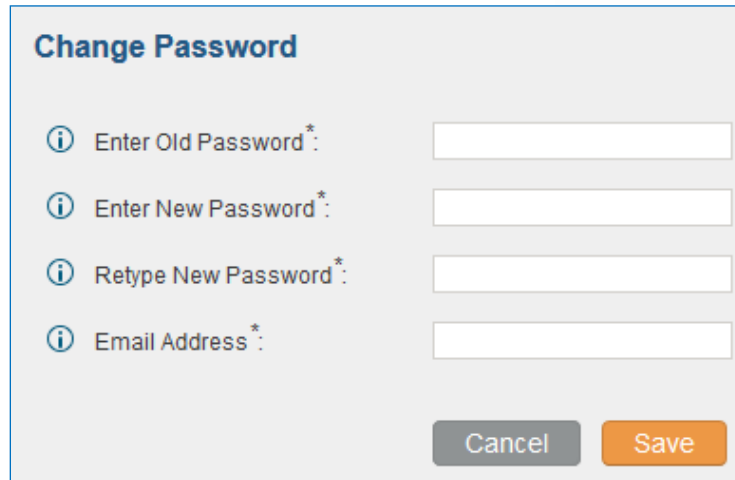

**Change Password**

Enter Old Password\* :

Enter New Password\* :

Retype New Password\* :

Email Address\* :


Cancel Save

**Figure 21 : Change Password**

|                            |   |
|----------------------------|---|
| <b>Enter Old Password</b>  | Enter the Old Password for UCM6200  |
| <b>Enter New Password</b>  | Enter the New Password for UCM6200  |
| <b>Retype New Password</b> | Retype the New Password for UCM6200   |
| <b>Email Address</b>       | Configure the Email address for UCM6200. In case login credential is lost, Email address is used to retrieve login credential |

### Change binding Email

UCM6200 allows user to configure binding email in case login password is lost. UCM6200 login credential will be sent to the designated email address. The feature can be found under web UI->Settings->User Management->Change Binding Email.

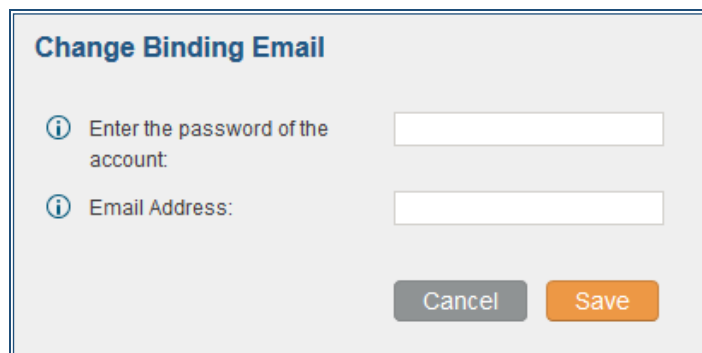

**Change Binding Email**

Enter the password of the account:

Email Address:

Cancel Save

**Figure 22: Change Binding Email**



**Table 8: Change Binding Email option**

|  |  |
|--|--|
| <b>Enter the password of the account</b> | Enter the current login user credential for UCM6200              |
| <b>Email Address</b>                     | Email Address is used to retrieve password when password is lost |

## Network Settings

After successfully connecting the UCM6200 to the network for the first time, users could login the Web GUI and go to **Settings->Network Settings** to configure the network parameters for the device.

- UCM6200 supports Route/Switch/Dual mode functions.

In this section, all the available network setting options are listed for all models. Select each tab in web GUI->**Settings->Network Settings** page to configure LAN settings, WAN settings, 802.1X and Port Forwarding.

## Basic Settings

Please refer to the following tables for basic network configuration parameters on UCM6202/UCM6204/UCM6208.

**Table 9: UCM6200 Network Settings->Basic Settings**

|  |  |
|--|--|
| <b>Method</b>                                | Select "Route", "Switch" or "Dual" mode on the network interface of UCM6200. The default setting is "Route". <ul style="list-style-type: none"> <li>• <b>Route</b><br/>WAN port interface will be used for uplink connection. LAN port interface will be used to serve as router.</li> <li>• <b>Switch</b><br/>WAN port interface will be used for uplink connection. LAN port interface will be used as bridge for PC connection.</li> <li>• <b>Dual</b><br/>Both ports can be used for uplink connection. Users will need assign LAN 1 or LAN 2 as the default interface in option "Default Interface" and configure "Gateway IP" for this interface.</li> </ul> |
| <b>MTU</b>                                   | Specifies the Maximum Transmission Unit. (By default its 1500)   |
| <b>IPv4 Address</b>                          |  |
| <b>Preferred DNS Server</b>                  | Enter the preferred DNS server address. If Preferred DNS is used, UCM will try to use it as Primary DNS server.  |
| <b>WAN (when "Method" is set to "Route")</b> |  |
| <b>IP Method</b>                             | Select DHCP, Static IP, or PPPoE. The default setting is DHCP.   |
| <b>IP Address</b>                            | Enter the IP address for static IP settings. The default setting is 192.168.0.160.   |
| <b>Subnet Mask</b>                           | Enter the subnet mask address for static IP settings. The default setting is 255.255.0.0.  |
| <b>Gateway IP</b>                            | Enter the gateway IP address for static IP settings. The default setting is 0.0.0.0.   |



|   |  |
|---|--|
| <b>DNS Server 1</b>                         | Enter the DNS server 1 address for static IP settings. The default setting is 0.0.0.0.     |
| <b>DNS Server 2</b>                         | Enter the DNS server 2 address for static IP settings.                                     |
| <b>User Name</b>                            | Enter the user name to connect via PPPoE.  |
| <b>Password</b>                             | Enter the password to connect via PPPoE.   |
| <b>Layer 2 QoS 802.1Q/VLAN Tag</b>          | Assign the VLAN tag of the layer 2 QoS packets for WAN port. The default value is 0.       |
| <b>Layer 2 QoS 802.1p Priority Value</b>    | Assign the priority value of the layer 2 QoS packets for WAN port. The default value is 0. |
| <b>LAN (when Method is set to "Route")</b>  |  |
| <b>IP Address</b>                           | Enter the IP address assigned to LAN port. The default setting is 192.168.2.1.             |
| <b>Subnet Mask</b>                          | Enter the subnet mask. The default setting is 255.255.255.0.                               |
| <b>DHCP Server Enable</b>                   | Enable or disable DHCP server capability. The default setting is "Yes".                    |
| <b>DNS Server 1</b>                         | Enter DNS server address 1. The default setting is 8.8.8.8.                                |
| <b>DNS Server 2</b>                         | Enter DNS server address 2. The default setting is 208.67.222.222.                         |
| <b>Allow IP Address From</b>                | Enter the DHCP IP Pool starting address. The default setting is 192.168.2.100.             |
| <b>Allow IP Address To</b>                  | Enter the DHCP IP Pool ending address. The default setting is 192.168.2.254.               |
| <b>Default IP Lease Time</b>                | Enter the IP lease time (in seconds). The default setting is 43200.                        |
| <b>LAN (when Method is set to "Switch")</b> |  |
| <b>IP Method</b>                            | Select DHCP, Static IP, or PPPoE. The default setting is DHCP.                             |
| <b>IP Address</b>                           | Enter the IP address for static IP settings. The default setting is 192.168.0.160.         |
| <b>Subnet Mask</b>                          | Enter the subnet mask address for static IP settings. The default setting is 255.255.0.0.  |
| <b>Gateway IP</b>                           | Enter the gateway IP address for static IP settings. The default setting is 0.0.0.0.       |
| <b>DNS Server 1</b>                         | Enter the DNS server 1 address for static IP settings. The default setting is 0.0.0.0.     |
| <b>DNS Server 2</b>                         | Enter the DNS server 2 address for static IP settings.                                     |
| <b>User Name</b>                            | Enter the user name to connect via PPPoE.  |
| <b>Password</b>                             | Enter the password to connect via PPPoE.   |
| <b>Layer 2 QoS 802.1Q/VLAN Tag</b>          | Assign the VLAN tag of the layer 2 QoS packets for LAN port. The default value is 0.       |
| <b>Layer 2 QoS 802.1p Priority</b>          | Assign the priority value of the layer 2 QoS packets for LAN port. The default value is 0. |



| Value   |   |
|---|---|
| <b>LAN 1 / LAN 2 (when Method is set to "Dual")</b> |   |
| <b>Default Interface</b>                            | If "Dual" is selected as "Method", users will need assign the default interface to be LAN 1 (mapped to UCM6202 WAN port) or LAN 2 (mapped to UCM6202 LAN port) and then configure network settings for LAN 1/LAN 2. The default interface is LAN 2. |
| <b>IP Method</b>                                    | Select DHCP, Static IP, or PPPoE. The default setting is DHCP.  |
| <b>IP Address</b>                                   | Enter the IP address for static IP settings. The default setting is 192.168.0.160.  |
| <b>Subnet Mask</b>                                  | Enter the subnet mask address for static IP settings. The default setting is 255.255.0.0.   |
| <b>Gateway IP</b>                                   | Enter the gateway IP address for static IP settings when the port is assigned as default interface. The default setting is 0.0.0.0.   |
| <b>DNS Server 1</b>                                 | Enter the DNS server 1 address for static IP settings. The default setting is 0.0.0.0.  |
| <b>DNS Server 2</b>                                 | Enter the DNS server 2 address for static IP settings.  |
| <b>User Name</b>                                    | Enter the user name to connect via PPPoE.   |
| <b>Password</b>                                     | Enter the password to connect via PPPoE.  |
| <b>Layer 2 QoS 802.1Q/VLAN Tag</b>                  | Assign the VLAN tag of the layer 2 QoS packets for LAN port. The default value is 0.  |
| <b>Layer 2 QoS 802.1p Priority Value</b>            | Assign the priority value of the layer 2 QoS packets for LAN port. The default value is 0.  |
| <b>IPv6 Address</b>                                 |   |
| <b>WAN (when "Method" is set to "Route")</b>        |   |
| <b>IP Method</b>                                    | Select Auto or Static. The default setting is Auto  |
| <b>IP Address</b>                                   | Enter the IP address for static IP settings.  |
| <b>IP Prefixlen</b>                                 | Enter the Prefix length for static settings. Default is 64  |
| <b>DNS Server 1</b>                                 | Enter the DNS server 1 address for static settings.   |
| <b>DNS Server 2</b>                                 | Enter the DNS server 2 address for static settings.   |
| <b>LAN (when Method is set to "Route")</b>          |   |
| <b>DHCP Server</b>                                  | Select Disable, Auto or DHCPv6.<br><b>Disable:</b> the DHCPv6 server is disabled.<br><b>Auto:</b> Stateless address auto configuration using NDP protocol.<br><b>DHCPv6:</b> Stateful address auto configuration using DHCPv6 protocol.             |
| <b>DHCP Prefix</b>                                  | Enter DHCP prefix. (Default is 2001:db8:2:2::)  |
| <b>DHCP prefixlen</b>                               | Enter the Prefix length for static settings. Default is 64  |
| <b>DNS Server 1</b>                                 | Enter the DNS server 1 address for static settings. Default is (2001:4860:4860::8888 )  |
| <b>DNS Server 2</b>                                 | Enter the DNS server 2 address for static settings. Default is (2001:4860:4860::8844 )  |





|   |  |
|---|--|
| <b>Allow IP Address From</b>                        | Configure starting IP address assigned by the DHCP prefix and DHCP prefixlen.  |
| <b>Allow IP Address To</b>                          | Configure the ending IP address assigned by the DHCP Prefix and DHCP prefixlen.  |
| <b>Default IP Lease Time</b>                        | Configure the lease time(in second) of the IP address.   |
| <b>LAN (when Method is set to "Switch")</b>         |  |
| <b>IP Method</b>                                    | Select Auto or Static. The default setting is Auto   |
| <b>IP Address</b>                                   | Enter the IP address for static IP settings.   |
| <b>IP Prefixlen</b>                                 | Enter the Prefix length for static settings. Default is 64   |
| <b>DNS Server 1</b>                                 | Enter the DNS server 1 address for static settings.  |
| <b>DNS Server 2</b>                                 | Enter the DNS server 2 address for static settings.  |
| <b>LAN 1 / LAN 2 (when Method is set to "Dual")</b> |  |
| <b>Default Interface</b>                            | Users will need assign the default interface to be LAN 1 (mapped to UCM6200 WAN port) or LAN 2 (mapped to UCM6200 LAN port) and then configure network settings for LAN 1/LAN 2. The default interface is LAN 2. |
| <b>IP Method</b>                                    | Select Auto or Static. The default setting is Auto   |
| <b>IP Address</b>                                   | Enter the IP address for static IP settings.   |
| <b>IP Prefixlen</b>                                 | Enter the Prefix length for static settings. Default is 64   |
| <b>DNS Server 1</b>                                 | Enter the DNS server 1 address for static settings.  |
| <b>DNS Server 2</b>                                 | Enter the DNS server 2 address for static settings.  |

- **Method: Route**

When the UCM6200 has method set to Route in network settings, WAN port interface is used for uplink connection and LAN port interface is used as a router. Please see a sample diagram below.



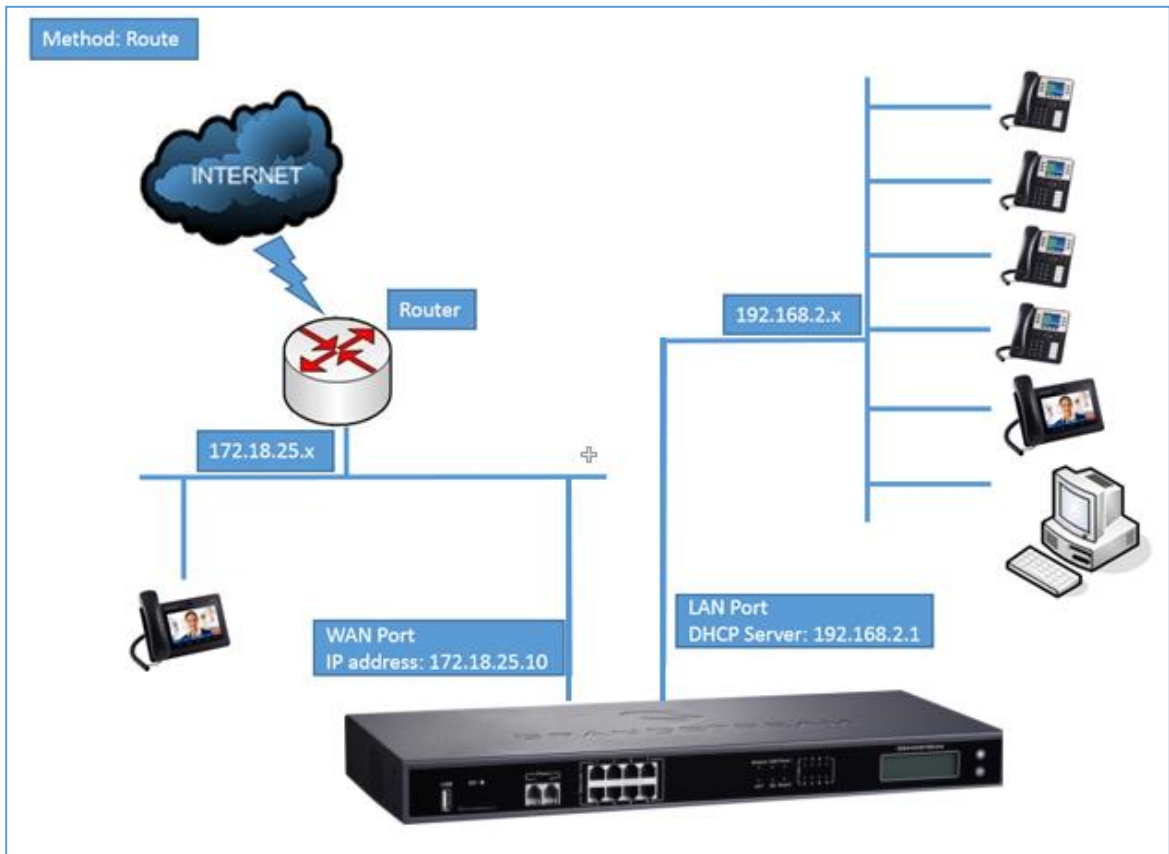


Figure 23: UCM6200 Network Interface Method: Route

- **Method: Switch**

WAN port interface is used for uplink connection; LAN port interface is used as bridge for PC connection.




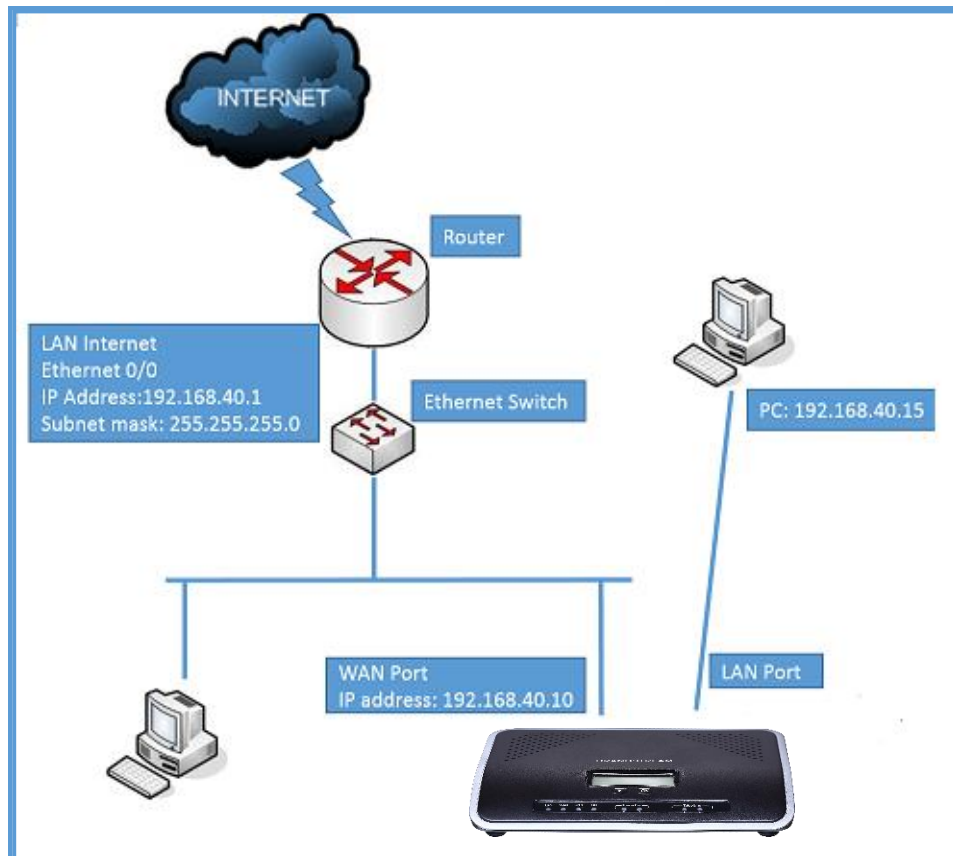


Figure 24: UCM6200 Network Interface Method: Switch

- **Method: Dual**

Both WAN port and LAN port are used for uplink connection. Users will need assign LAN 1 or LAN 2 as the default interface in option "Default Interface" and configure "Gateway IP" if static IP is used for this interface.

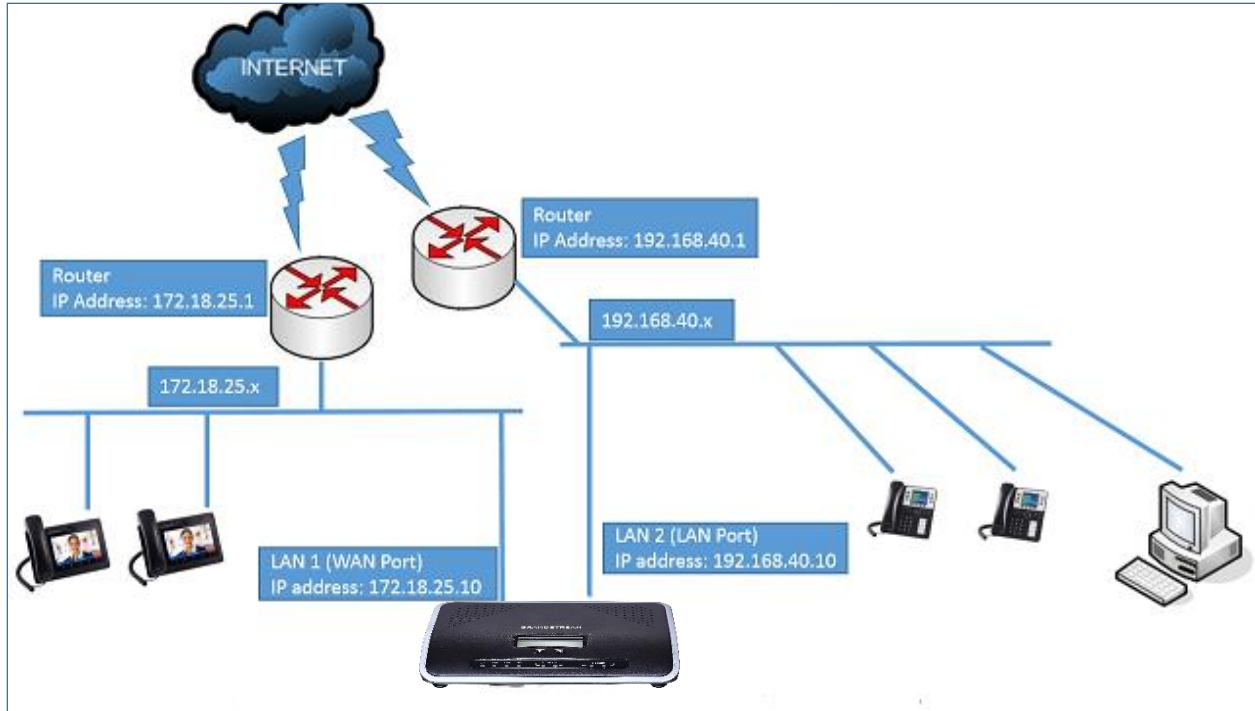

**Figure 25: UCM6200 Network Interface Method: Dual**

### DHCP Client List

This feature can bind MAC to IP addresses on the LAN port when UCM6200 is set to Route mode.


When devices receive IP addresses from LAN port, they will be listed on the webUI under “Settings > Network Settings > DHCP Client List” as shown below.

| MAC Address  | IP Address    | Bind Status | Options                             |
|--------------|---------------|-------------|-------------------------------------|
| 000b825e66d9 | 192.168.2.104 | Unbind      | <a href="#">+</a> <a href="#">-</a> |
| 000b826b1355 | 192.168.2.103 | Unbind      | <a href="#">+</a> <a href="#">-</a> |
| 000B82836613 | 192.168.2.111 | Binding     | <a href="#">+</a> <a href="#">-</a> |

**Figure 26: DHCP Client List**

User can bind manually a MAC to an IP address by clicking on **Add Mac Address Bind**, the following figure will pop up.




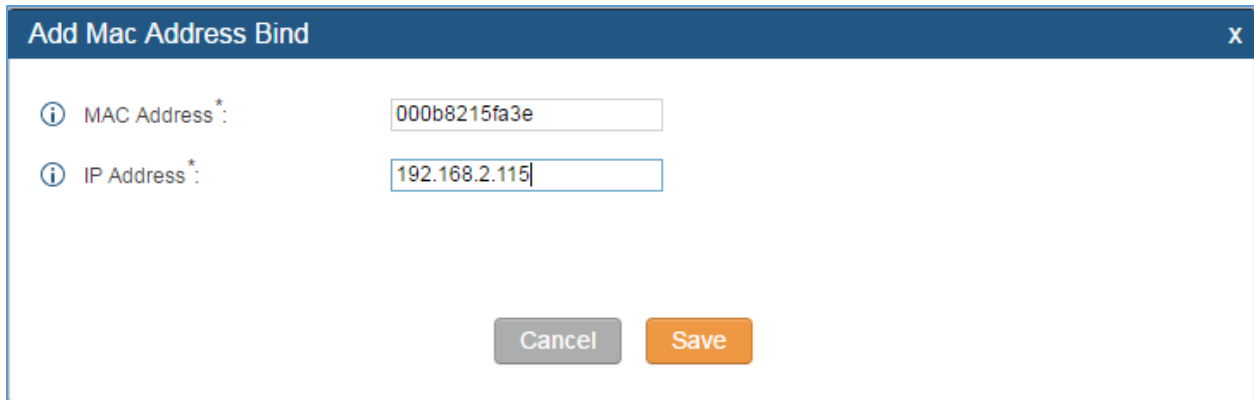

**Figure 27: Add MAC Address Bind**

User needs to set the device MAC address and the IP that will be bound to it (the IP address needs to be within the UCM6200 DHCP range).

In order to bind a batch of listed MAC addresses, user needs to check first the MAC addresses to bind and click on **Batch add mac address bind**. A confirmation popup will be shown, click **OK** to bind the addresses.

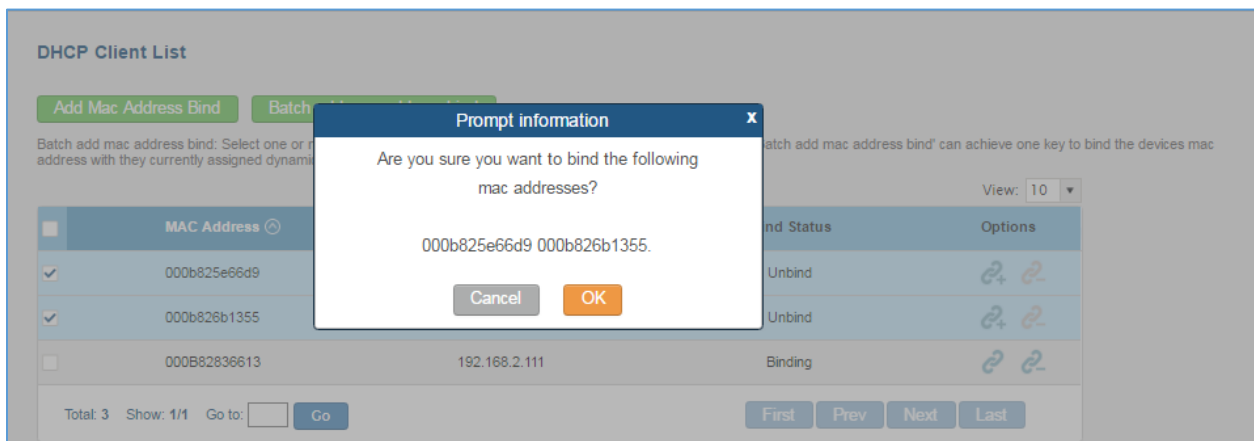

| MAC Address                                      | IP Address    | Bind Status | Options |
|--|---------------|-------------|---------|
| <input checked="" type="checkbox"/> 000b825e66d9 |               | Unbind      |         |
| <input checked="" type="checkbox"/> 000b826b1355 |               | Unbind      |         |
| <input type="checkbox"/> 000B82836613            | 192.168.2.111 | Binding     |         |


**Figure 28: Batch Add MAC Address Bind**

After Clicking “OK” to confirm the binding, the “Bind Status” will change from “Unbind” to “Binding”.


## 802.1X

IEEE 802.1X is an IEEE standard for port-based network access control. It provides an authentication mechanism to device before the device is allowed to access Internet or other LAN resources. The UCM6200 supports 802.1X as a supplicant/client to be authenticated. The following diagram and figure show UCM6200 uses 802.1X mode “EAP-MD5” on WAN port as client in the network to access Internet.



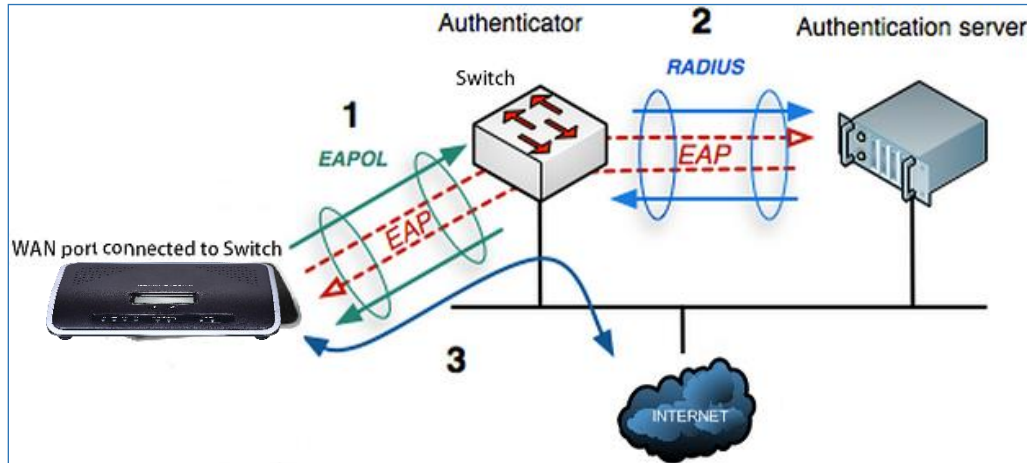

**Figure 29: UCM6200 Using 802.1X as Client**

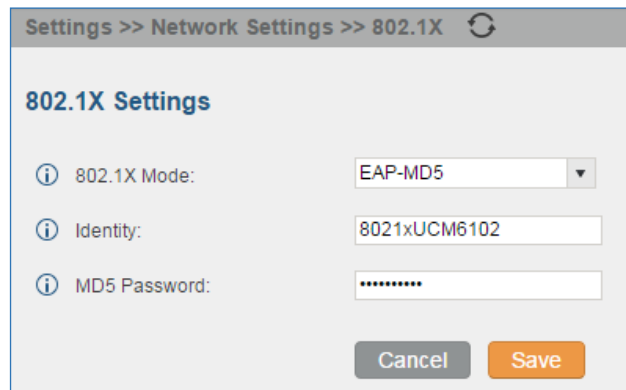

**Figure 30: UCM6200 Using 802.1X EAP-MD5**

The following table shows the configuration parameters for 802.1X on UCM6200. Identity and MD5 password are required for authentication, which should be provided by the network administrator obtained from the RADIUS server. If “EAP-TLS” or “EAP-PEAPv0/MSCHAPv2” is used as the 802.1X mode, users will also need to upload 802.1X CA Certificate and 802.1X Client Certificate, which should be also generated from the RADIUS server.

**Table 10: UCM6200 Network Settings->802.1X**

|                           |  |
|---------------------------|--|
| <b>802.1X Mode</b>        | Select 802.1X mode. The default setting is "Disable". The supported 802.1X mode are: <ul style="list-style-type: none"> <li>• EAP-MD5</li> <li>• EAP-TLS</li> <li>• EAP-PEAPv0/MSCHAPv2</li> </ul> |
| <b>Identity</b>           | Enter 802.1X mode identity information.  |
| <b>MD5 Password</b>       | Enter 802.1X mode MD5 password information.  |
| <b>802.1X Certificate</b> | Select 802.1X certificate from local PC and then upload.   |






**802.1X Client Certificate**

Select 802.1X client certificate from local PC and then upload.

## Static Routes

The UCM6200 provides users static routing capability that allows the device to use manually configured routes, rather than information only from dynamic routing or gateway configured in the UCM6200 web GUI->**Network Settings->Basic Settings** to forward traffic. It can be used to define a route when no other routes are available or necessary, or used in complementary with existing routing on the UCM6200 as a failover backup, and etc.

- Click on  to create a new static route. The configuration parameters are listed in the table below.
- Once added, users can select  to edit the static route.
- Select  to delete the static route.

**Table 11: UCM6200 Network Settings->Static Routes**


|                    |   |
|--------------------|---|
| <b>Destination</b> | Configure the destination IP address or the destination IP subnet for the UCM6200 to reach using the static route.<br>Example:<br>IP address - <b>192.168.66.4</b><br>IP subnet - <b>192.168.66.0</b> |
| <b>Netmask</b>     | Configure the subnet mask for the above destination address. If left blank, the default value is 255.255.255.255.<br>Example:<br><b>255.255.255.0</b>   |
| <b>Gateway</b>     | Configure the gateway address so that the UCM6200 can reach the destination via this gateway. Gateway address is optional.<br>Example:<br><b>192.168.40.5</b>   |
| <b>Interface</b>   | Specify the network interface on the UCM6200 to reach the destination using the static route.<br>LAN interface is eth0; WAN interface is eth1.  |





Static routes configuration can be reset from LCD menu->Network Menu.

The following diagram shows a sample application of static route usage on UCM6204.

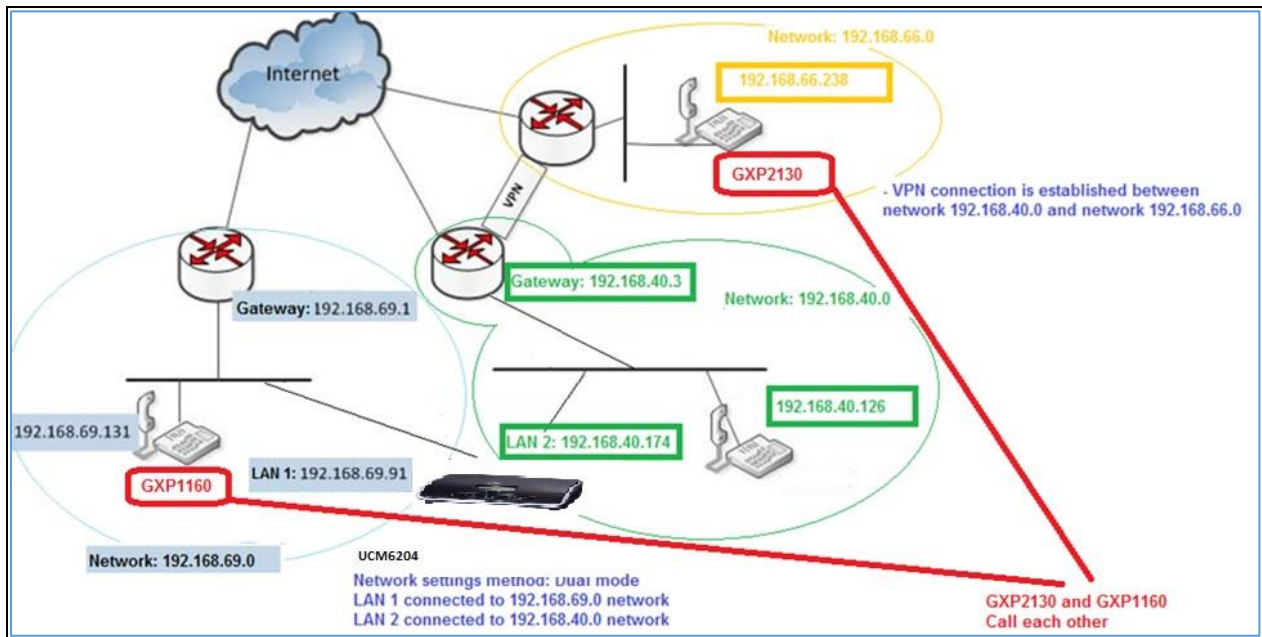

**Figure 31: UCM6204 Static Route Sample**

The network topology of the above diagram is as below:

- Network 192.168.69.0 has IP phones registered to UCM6204 LAN 1 address
- Network 192.168.40.0 has IP phones registered to UCM6204 LAN 2 address
- Network 192.168.66.0 has IP phones registered to UCM6204 via VPN
- Network 192.168.40.0 has VPN connection established with network 192.168.66.0

In this network, by default the IP phones in network 192.168.69.0 are unable to call IP phones in network 192.168.66.0 when registered on different interfaces on the UCM6204. Therefore, we need configure a static route on the UCM6204 so that the phones in isolated networks can make calls between each other.





**Create New Static Route**

i Destination:

i Netmask:

i Gateway:

i Interface:  ▼

**Figure 32: UCM6204 Static Route Configuration**

## Port Forwarding

The UCM network interface supports router function which provides users the ability to do port forwarding. If LAN mode is set to "Route" under web GUI->**Settings->Network Settings->Basic Settings** page, port forwarding is available for configuration.

The port forwarding configuration is under web GUI->**Settings->Network Settings->Port Forwarding** page. Please see related settings in the table below.

**Table 12: UCM6200 Network Settings->Port Forwarding**

|                 |   |
|-----------------|---|
| <b>WAN Port</b> | Specify the WAN port number or a range of WAN ports. Unlimited number of ports can be configured.<br><br><b>Note:</b><br>When it is set to a range, WAN port and LAN port must be configured with the same range, such as WAN port: 1000-1005 and LAN port: 1000-1005, and access from WAN port will be forwarded to the LAN port with the same port number, for example, WAN port 1000 will be port forwarding to LAN port 1000. |
| <b>LAN IP</b>   | Specify the LAN IP address.   |
| <b>LAN Port</b> | Specify the LAN port number or a range of LAN ports.<br><br><b>Note:</b><br>When it is set to a range, WAN port and LAN port must be configured with the same range, such as WAN port: 1000-1005 and LAN port: 1000-1005, and access from WAN port will be forwarded to the LAN port with the same port number, for example, WAN port 1000 will be port forwarding to LAN port 1000.  |



|                      |  |
|----------------------|--|
| <b>Protocol Type</b> | Select protocol type "UDP Only", "TCP Only" or "TCP/UDP" for the forwarding in the selected port. The default setting is "UDP Only". |
|----------------------|--|

The following figures demonstrate a port forwarding example to provide phone's web UI access to public side.


- UCM6200 network mode is set to "Route".
- UCM6200 WAN port is connected to uplink switch, with a public IP address configured, e.g. 1.1.1.1.
- UCM6200 LAN port provides DHCP pool that connects to multiple phone devices in the LAN network 192.168.2.x. The UCM6200 is used as a router, with gateway address 192.168.2.1.
- There is a GXP2160 connected under the LAN interface network of the UCM6200. It obtains IP address 192.168.2.100 from UCM6200 DHCP pool.
- On the UCM6200 web UI->**Settings->Network Settings->Port Forwarding**, configure a port forwarding entry as the figure shows below.
- Click on Create New Port Forwarding

**WAN Port:** This is the port opened up on the WAN side for access purpose.

**LAN IP:** This is the GXP2160 IP address, under the LAN interface network of the UCM6200.

**LAN Port:** This is the port opened up on the GXP2160 side for access purpose.

**Protocol Type:** We select TCP here for web UI access using HTTP.

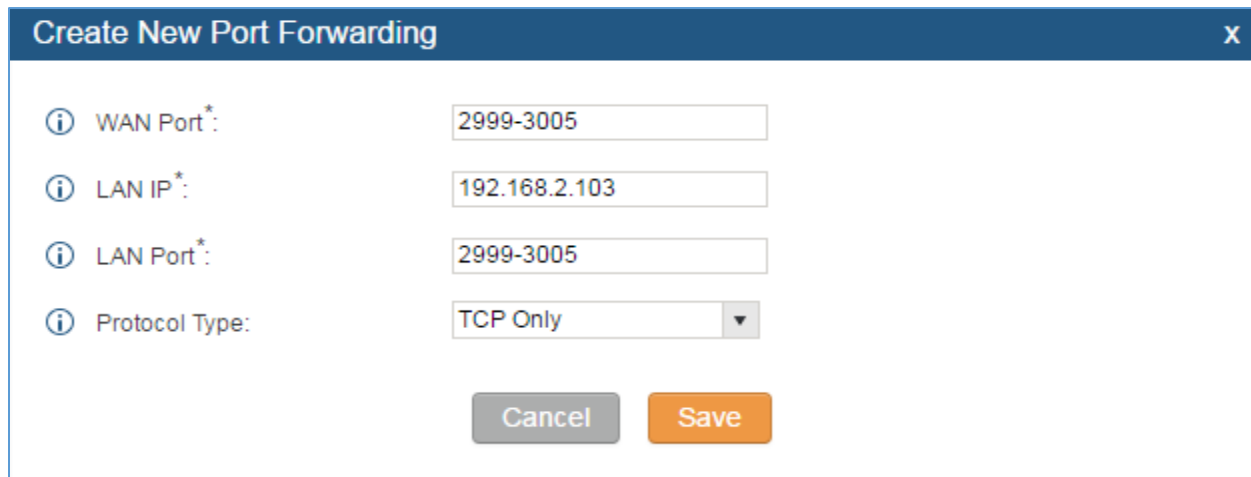

The screenshot shows a dialog box titled "Create New Port Forwarding" with a close button (X) in the top right corner. It contains four input fields, each with an information icon (i) to its left:

- WAN Port\*:** Input field containing "2999-3005".
- LAN IP\*:** Input field containing "192.168.2.103".
- LAN Port\*:** Input field containing "2999-3005".
- Protocol Type:** A dropdown menu currently showing "TCP Only".

At the bottom of the dialog, there are two buttons: a grey "Cancel" button and an orange "Save" button.

**Figure 33: Create New Port Forwarding**

Settings >> Network Settings >> Port Forwarding

### Port Forwarding

Please configure the LAN mode as Router to enable this function.

When Port Forwarding is set to range, WAN port and LAN port must have the same start value and end value (such as 1000-1005 and 1000-1005). Range matches with range, single port matches with single port, such as 4444 matches 5555, 1500-1505 matches 1500-1505.

[Create New Port Forwarding](#)

View: 10

| WAN Port  | LAN IP        | LAN Port  | Protocol Type | Options |
|-----------|---------------|-----------|---------------|---------|
| 2999-3005 | 192.168.2.103 | 2999-3005 | TCP Only      |         |
| 8088      | 192.168.2.100 | 80        | TCP Only      |         |

Total: 2 Show: 1/1 Go to:

**Figure 34: UCM6200 Port Forwarding Configuration**

This will allow users to access the GXP2160 web UI from public side, by typing in address “1.1.1.1:8088”.

1.1.1.1:8088#page:status\_network

Grandstream GXP2160 Admin Logout | Reboot | Provision | Factory Reset English

**GRANDSTREAM** STATUS ACCOUNTS SETTINGS NETWORK MAINTENANCE PHONEBOOK

Version 1.0.5.23

**Status**

- Account Status
- Network Status**
- System Info

### Network Status

|              |                                    |
|--------------|------------------------------------|
| MAC Address  | 00:0B:82:59:A9:9A                  |
| IP Setting   | DHCP                               |
| IPv4 Address | 192.168.2.100                      |
| IPv6 Address | 2001:470:d:10a2:20b:82ff:fe59:a99a |
| Subnet Mask  | 255.255.255.0                      |
| Gateway      | 192.168.2.1                        |
| DNS Server 1 | 4.2.2.1                            |
| DNS Server 2 | 4.2.2.2                            |

**Figure 35: GXP2160 Web Access Using UCM6202 Port Forwarding**

## OpenVPN

Open VPN settings allow the users to configure UCM6200 to use VPN features

**Table 13: UCM6200 Settings -> Network Settings -> Open VPN**

|                       |   |
|-----------------------|---|
| <b>Enable</b>         | Enable / Disable the open VPN feature.  |
| <b>Server Address</b> | Configures the hostname/lp and port of the server. For example : 192.168.1.2:22 |



|                         |   |
|-------------------------|---|
| <b>Server Protocol</b>  | Specify the protocol user, user should use the same settings as used on the server  |
| <b>Device Mode</b>      | Use the same setting as used on the server.<br><b>Dev TUN:</b> Create a routed IP tunnel.<br><b>Dev TAP:</b> Create an Ethernet tunnel. |
| <b>User Compression</b> | Compress tunnel packets using the LZO algorithm on the VPN link. Don't enable this unless it is also enabled in the server config file. |
| <b>CA Cert</b>          | Upload as SSL/TLS root certificate. This file will be renamed as 'ca.crt' automatically.  |
| <b>Client Cert</b>      | Upload a client certificate. This file will be renamed as 'cliend.crt' automatically.   |
| <b>Client Key</b>       | Upload a client private key. This file will be renamed as 'client.key' automatically.   |

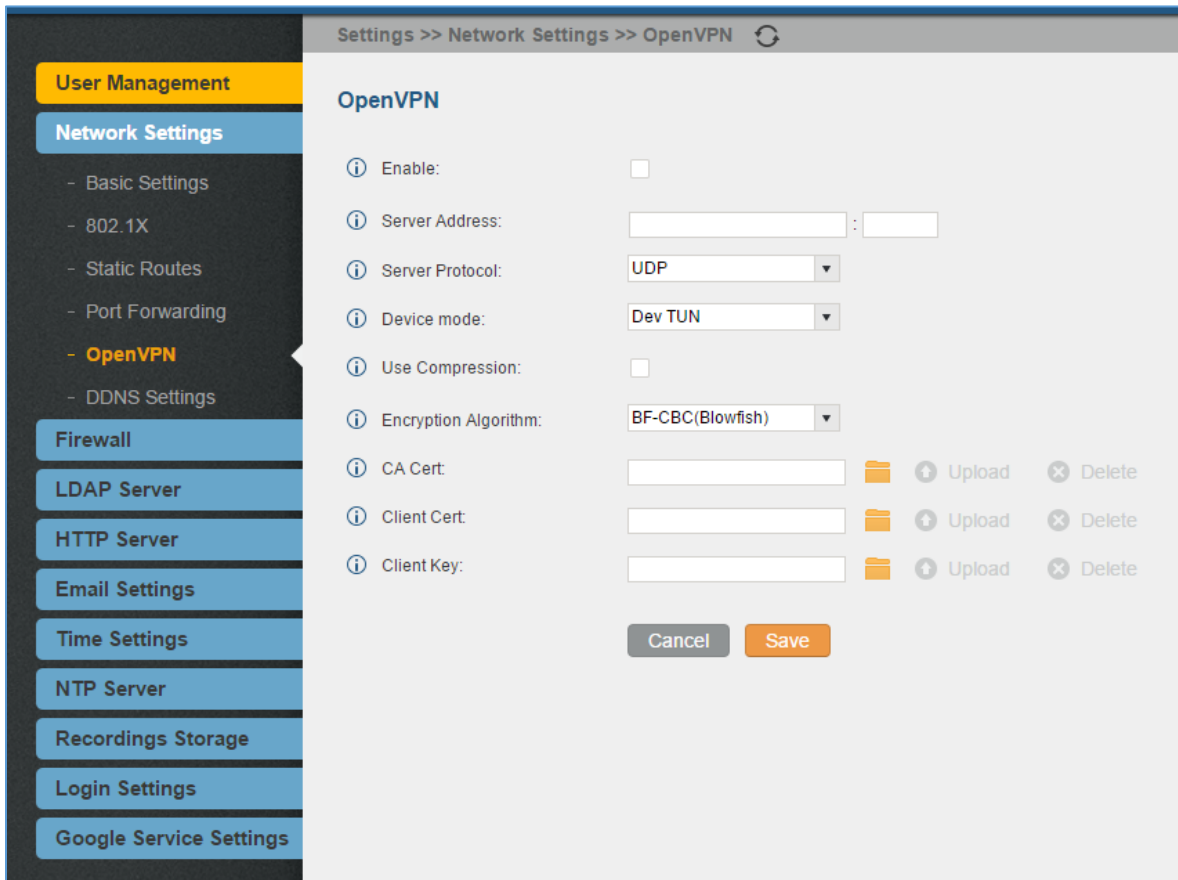


Figure 36: Open VPN feature on the UCM6200

## DDNS Settings

DDNS setting allows user to access UCM6200 via domain name instead of IP address.


The UCM supports DDNS service from the following DDNS provider:



- dydns.org
- noip.com
- freedns.afraid.org
- zoneedit.com
- oray.net

Here is an example of using noip.com for DDNS.

1. Register domain in DDNS service provider. Please note the UCM6200 needs to have public IP access.

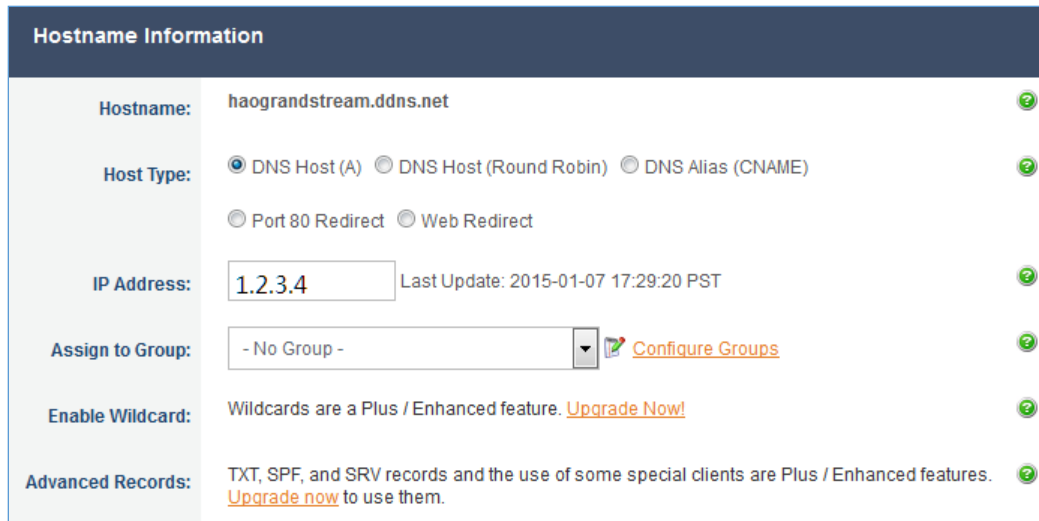


The screenshot shows the 'Hostname Information' configuration page. It includes the following fields and options:

- Hostname:** haograndstream.ddns.net
- Host Type:** Radio buttons for DNS Host (A) (selected), DNS Host (Round Robin), DNS Alias (CNAME), Port 80 Redirect, and Web Redirect.
- IP Address:** Text input field containing '1.2.3.4' and a 'Last Update' timestamp of '2015-01-07 17:29:20 PST'.
- Assign to Group:** A dropdown menu currently set to '- No Group -' with a 'Configure Groups' link.
- Enable Wildcard:** A text field with the message 'Wildcards are a Plus / Enhanced feature. Upgrade Now!'.
- Advanced Records:** A text field with the message 'TXT, SPF, and SRV records and the use of some special clients are Plus / Enhanced features. Upgrade now to use them.'

Figure 37: Register Domain Name on noip.com

2. On web UI->Settings->Network Settings->DDNS Settings, enable DDNS service and configure username, password and host name.

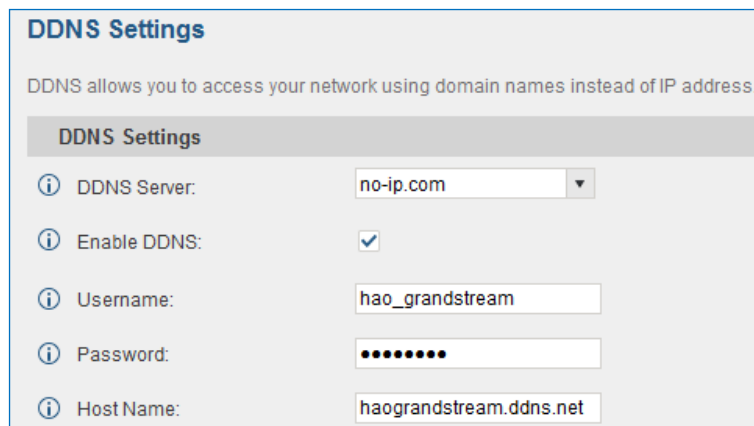

The screenshot shows the 'DDNS Settings' configuration page. It includes the following fields and options:

- DDNS Server:** A dropdown menu set to 'no-ip.com'.
- Enable DDNS:** A checkbox that is checked.
- Username:** A text input field containing 'hao\_grandstream'.
- Password:** A password input field with masked characters (dots).
- Host Name:** A text input field containing 'haograndstream.ddns.net'.

Figure 38: UCM6200 DDNS Setting



3. Now you can use domain name instead of IP address to connect to the UCM6200 web UI.

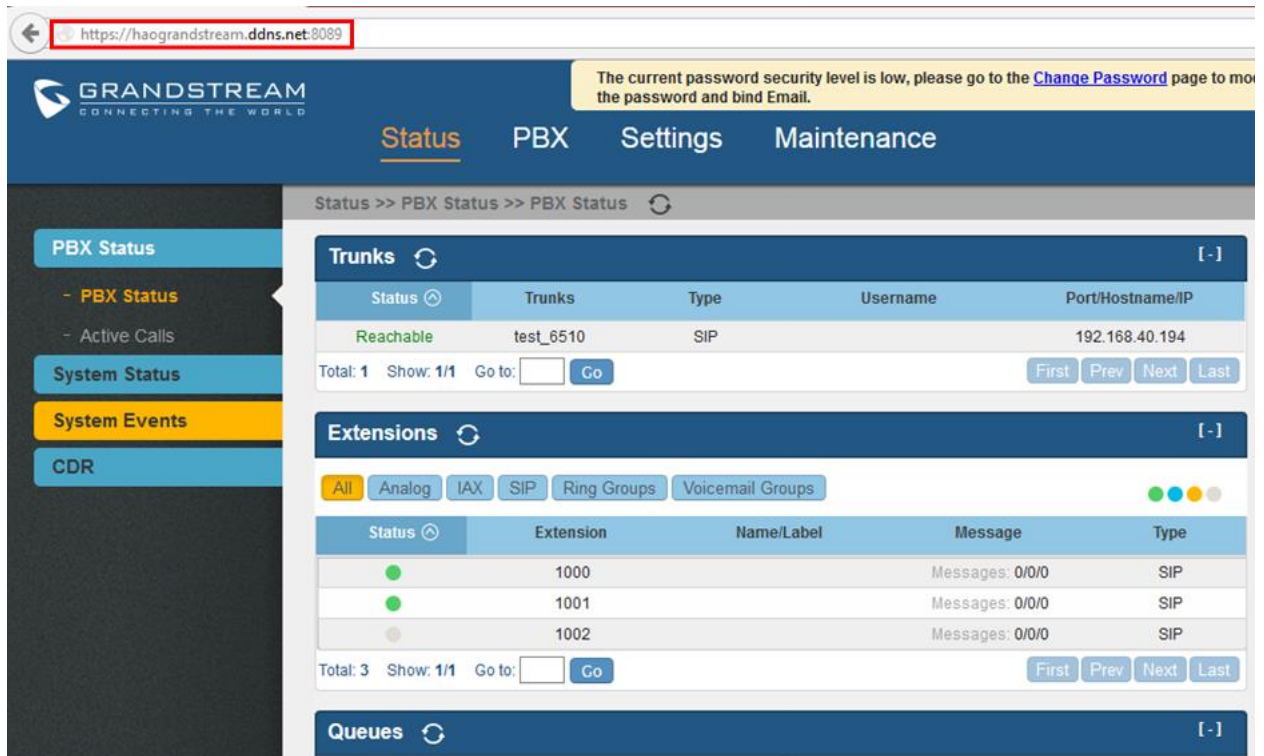


Figure 39: Using Domain Name to Connect to UCM6200

## Firewall

The UCM6200 provides users firewall configurations to prevent certain malicious attack to the UCM6200 system. Users could configure to allow, restrict or reject specific traffic through the device for security and bandwidth purpose. The UCM6200 also provides Fail2ban feature for authentication errors in SIP REGISTER, INVITE and SUBSCRIBE. To configure firewall settings in the UCM6200, go to Web UI->**Settings**->**Firewall** page.

## Static Defense

Under Web GUI->**Settings**->**Firewall**->**Static Defense** page, users will see the following information:

- Current service information with port, process and type.
- Typical firewall settings.
- Custom firewall settings.

The following table shows a sample current service status running on the UCM6200.



**Table 14: UCM6200 Firewall->Static Defense->Current Service**

| Port  | Process     | Type     | Protocol or Service         |
|-------|-------------|----------|-----------------------------|
| 7777  | Asterisk    | tcp/IPv4 | SIP                         |
| 389   | Slapd       | tcp/IPv4 | LDAP                        |
| 2000  | Asterisk    | tcp/IPv4 | SCCP                        |
| 22    | Dropbear    | tcp/IPv4 | SSH                         |
| 80    | Lighthttpd  | tcp/IPv4 | HTTP                        |
| 8089  | Lighthttpd  | tcp/IPv4 | HTTPS                       |
| 69    | Opentftpd   | udp/IPv4 | TFTP                        |
| 9090  | Asterisk    | udp/IPv4 | SIP                         |
| 6060  | zero_config | udp/IPv4 | UCM6200 zero_config service |
| 5060  | Asterisk    | udp/IPv4 | SIP                         |
| 4569  | Asterisk    | udp/IPv4 | SIP                         |
| 5353  | zero_config | udp/IPv4 | UCM6200 zero_config service |
| 37435 | Syslogd     | udp/IPv4 | Syslog                      |

For typical firewall settings, users could configure the following options on the UCM6200.

**Table 15: Typical Firewall Settings**


|                                     |  |
|-------------------------------------|--|
| <b>Ping Defense Enable</b>          | If enabled, ICMP response will not be allowed for Ping request. The default setting is disabled. To enable or disable it, click on the check box for the LAN or WAN (UCM6200) interface. |
| <b>Ping-of-Death Defense Enable</b> | Enable to prevent Ping-of-Death attack to the device. The default setting is disabled. To enable or disable it, click on the check box for the LAN or WAN (UCM6200) interface.           |

Under "Custom Firewall Settings", users could create new rules to accept, reject or drop certain traffic going through the UCM6200. To create new rule, click on "Create New Rule" button and a new window will pop up for users to specify rule options.

Right next to "Create New Rule" button, there is a checkbox for option "Reject Rules". If it's checked, all the rules will be rejected except the firewall rules listed below. In the firewall rules, only when there is a rule that meets all the following requirements, the option "Reject Rules" will be allowed to check:

- Action: "Accept"
- Type "In"
- Destination port is set to the system login port (e.g., by default 8089)
- Protocol is not UDP



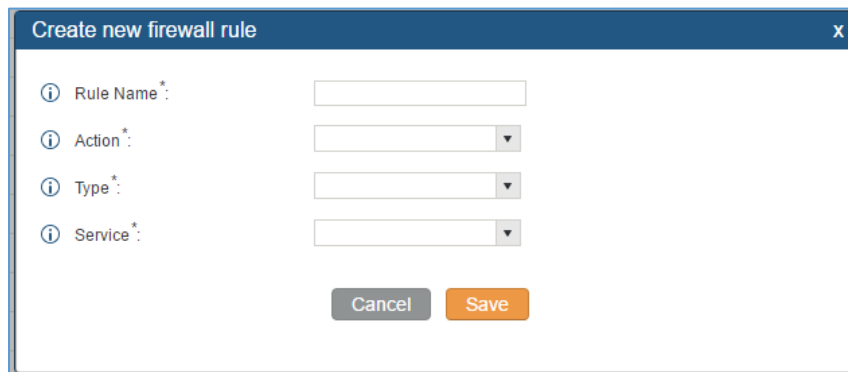

**Figure 40: Create New Firewall Rule**



**Table 16: Firewall Rule Settings**

|                  |  |
|------------------|--|
| <b>Rule Name</b> | Specify the Firewall rule name to identify the firewall rule.  |
| <b>Action</b>    | Select the action for the Firewall to perform. <ul style="list-style-type: none"> <li>• ACCEPT</li> <li>• REJECT</li> <li>• DROP</li> </ul>  |
| <b>Type</b>      | Select the traffic type. <ul style="list-style-type: none"> <li>• IN<br/>If selected, users will need specify the network interface "LAN" or "WAN" (for UCM6200) for the incoming traffic.</li> <li>• OUT</li> </ul>   |
| <b>Service</b>   | Select the service type. <ul style="list-style-type: none"> <li>• FTP</li> <li>• SSH</li> <li>• Telnet</li> <li>• TFTP</li> <li>• HTTP</li> <li>• LDAP</li> <li>• Custom</li> </ul> If "Custom" is selected, users will need specify Source (IP and port), Destination (IP and port) and Protocol (TCP, UDP or Both) for the service. Please note if the source or the destination field is left blank, it will be used as "Anywhere". |

Save the change and click on "Apply" button. Then submit the configuration by clicking on "Apply Changes" on the upper right of the web page. The new rule will be listed at the bottom of the page with sequence number, rule name, action, protocol, type, source, destination and operation. More operations below:





- Click on  to edit the rule
- Click on  to delete the rule

## Dynamic Defense

Dynamic defense is supported on the UCM6200 series. It can blacklist hosts dynamically when the LAN mode is set to "Route" under web GUI->**Settings->Network Settings->Basic Settings** page. If enabled, the traffic coming into the UCM6200 can be monitored, which helps prevent massive connection attempts or brute force attacks to the device. The blacklist can be created and updated by the UCM6200 firewall, which will then be displayed in the web page. Please refer to the following table for dynamic defense options on the UCM6200.


**Table 17: UCM6200 Firewall Dynamic Defense**

|                                  |  |
|----------------------------------|--|
| <b>Dynamic Defense Enable</b>    | Enable dynamic defense. The default setting is disabled.   |
| <b>Periodical Time Interval</b>  | Configure the dynamic defense periodic time interval (in minutes). If the number of TCP connections from a host exceeds the connection threshold within this period, this host will be added into Blacklist. The valid value is between 1 and 59 when dynamic defense is turned on. The default setting is 59. |
| <b>Blacklist Update Interval</b> | Configure the blacklist update time interval (in seconds). The default setting is 120.   |
| <b>Connection Threshold</b>      | Configure the connection threshold. Once the number of connections from the same host reaches the threshold, it will be added into the blacklist. The default setting is 100.  |
| <b>Dynamic Defense Whitelist</b> | Allowed IPs and ports range, multiple IP addresses and port range.<br><br>For example,<br><b>192.168.5.100-</b><br><b>192.168.5.200 1500:2000</b>  |

The following figure shows a configuration example like this:

- If a host at IP address 192.168.5.7 initiates more than 20 TCP connections to the UCM6200 within 1 minute, it will be added into UCM6200 blacklist.
- This host 192.168.5.7 will be blocked by the UCM6200 for 500 seconds.
- Since IP range 192.168.5.100-192.168.5.200 is in whitelist, if a host initiates more than 20 TCP connections to the UCM6200 within 1 minute, it will not be added into UCM6200 blacklist. It can still establish TCP connection with the UCM6200.



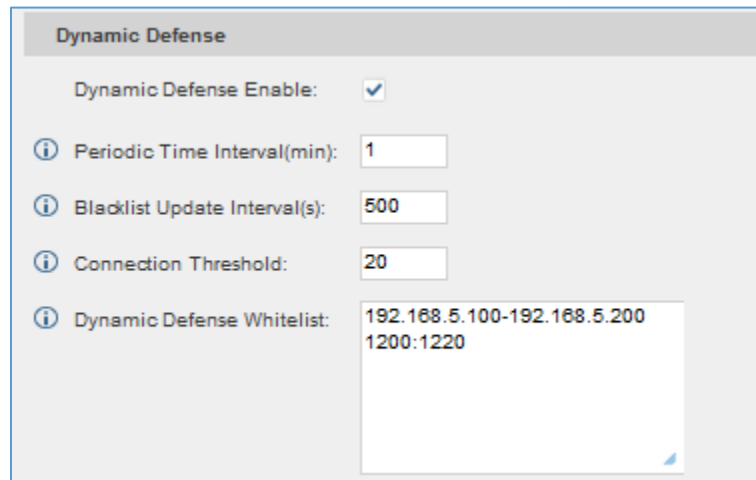

**Figure 41: Configure Dynamic Defense**

## Fail2ban

Fail2Ban feature on the UCM6200 provides intrusion detection and prevention for authentication errors in SIP REGISTER, INVITE and SUBSCRIBE. Once the entry is detected within "Max Retry Duration", the UCM6200 will take action to forbid the host for certain period as defined in "Banned Duration". This feature helps prevent SIP brute force attacks to the PBX system.

**Table 18: Fail2Ban Settings**

| Global Settings           |   |
|---------------------------|---|
| <b>Enable Fail2Ban</b>    | Enable Fail2Ban. The default setting is disabled. Please make sure both "Enable Fail2Ban" and "Asterisk Service" are turned on in order to use Fail2Ban for SIP authentication on the UCM6200.                      |
| <b>Banned Duration</b>    | Configure the duration (in seconds) for the detected host to be banned. The default setting is 300. If set to -1, the host will be always banned.   |
| <b>Max Retry Duration</b> | Within this duration (in seconds), if a host exceeds the max times of retry as defined in "MaxRetry", the host will be banned. The default setting is 5.  |
| <b>MaxRetry</b>           | Configure the number of authentication failures during "Max Retry Duration" before the host is banned. The default setting is 10.   |
| <b>Fail2Ban Whitelist</b> | Configure IP address, CIDR mask or DNS host in the whitelist. Fail2Ban will not ban the host with matching address in this list. Up to 5 addresses can be added into the list.                                      |
| Local Settings            |   |
| <b>Asterisk Service</b>   | Enable Asterisk service for Fail2Ban. The default setting is disabled. Please make sure both "Enable Fail2Ban" and "Asterisk Service" are turned on in order to use Fail2Ban for SIP authentication on the UCM6200. |
| <b>Protocol</b>           | Configure the listening port number for the service. Currently only 5060 (for UDP)  |



|                   |   |
|-------------------|---|
|                   | is supported.   |
| <b>MaxRetry</b>   | Configure the number of authentication failures during "Max Retry Duration" before the host is banned. The default setting is 10. Please make sure this option is properly configured as it will override the "MaxRetry" value under "Global Settings". |
| <b>Blacklist</b>  |   |
| <b>Black List</b> | Users will be able to view the IPs that have been blocked by UCM  |

## LDAP Server

The UCM6200 has an embedded LDAP server for users to manage corporate phonebook in a centralized manner.

- By default, the LDAP server has generated the first phonebook with **PBX DN** "ou=pbx,dc=pbx,dc=com" based on the UCM6200 user extensions already.
- Users could add new phonebook with a different **Phonebook DN** for other external contacts. For example, "ou=people,dc=pbx,dc=com".
- All the phonebooks in the UCM6200 LDAP server have the same **Base DN** "dc=pbx,dc=com".

### Term Explanation:

cn= Common Name

ou= Organization Unit

dc= Domain Component

These are all parts of the LDAP data Interchange Format, according to RFC 2849, which is how the LDAP tree is filtered.

If users have the Grandstream phone provisioned by the UCM6200, the LDAP directory will be set up on the phone and can be used right away for users to access all phonebooks.

Additionally, users could manually configure the LDAP client settings to manipulate the built-in LDAP server on the UCM6200. If the UCM6200 has multiple LDAP phonebooks created, in the LDAP client configuration, users could use "dc=pbx,dc=com" as Base DN to have access to all phonebooks on the UCM6200 LDAP server, or use a specific phonebook DN, for example "ou=people,dc=pbx,dc=com", to access to phonebook with Phonebook DN "ou=people,dc=pbx,dc=com " only.

UCM can also act as a LDAP client to download phonebook entries from other LDAP server.

To access LDAP server and client settings, go to **Web GUI->Settings->LDAP Server**.

## LDAP Server Configurations

The following figure shows the default LDAP server configurations on the UCM6200.

**LDAP Server configurations**

Base DN:

PBX DN:


Root DN:



Root Password:

Confirm Root Password:

**Figure 42: LDAP Server Configurations**

The UCM6200 LDAP server supports anonymous access (read-only) by default. Therefore, the LDAP client doesn't have to configure username and password to access the phonebook directory. The "Root DN" and "Root Password" here are for LDAP management and configuration where users will need provide for authentication purpose before modifying the LDAP information.

The default phonebook list in this LDAP server can be viewed and edited by clicking on  for the first phonebook under LDAP Phonebook.

| No. | Phonebook DN         | Options   |
|-----|----------------------|---|
| 1   | ou=pbx,dc=pbx,dc=com |   |

**Figure 43: Default LDAP Phonebook DN**



Edit Phonebook: ou=pbx,dc=pbx,dc=com

| LDAP Attributes  | Contact List   |               |              |      |          |      |             |      |         |      |            |      |            |      |           |      |       |      |              |      |                  |      |     |      |          |      |      |
|--|--|---------------|--------------|------|----------|------|-------------|------|---------|------|------------|------|------------|------|-----------|------|-------|------|--------------|------|------------------|------|-----|------|----------|------|------|
| <div style="display: flex; justify-content: space-between;"> <div style="width: 80%;"> <div style="margin-bottom: 5px;"><span style="font-size: 1.2em;">i</span> AccountNumber: <input style="width: 80%;" type="text" value="5000"/></div> <div style="margin-bottom: 5px;"><span style="font-size: 1.2em;">i</span> CallerIDName: <input style="width: 80%;" type="text" value="John Doe"/></div> <div style="margin-bottom: 5px;"><span style="font-size: 1.2em;">i</span> Email: <input style="width: 80%;" type="text"/></div> <div style="margin-bottom: 5px;"><span style="font-size: 1.2em;">i</span> FirstName: <input style="width: 80%;" type="text"/></div> <div style="margin-bottom: 5px;"><span style="font-size: 1.2em;">i</span> LastName: <input style="width: 80%;" type="text"/></div> <div style="margin-bottom: 5px;"><span style="font-size: 1.2em;">i</span> Department: <input style="width: 80%;" type="text"/></div> <div style="margin-bottom: 5px;"><span style="font-size: 1.2em;">i</span> MobileNumber: <input style="width: 80%;" type="text"/></div> <div style="margin-bottom: 5px;"><span style="font-size: 1.2em;">i</span> HomeNumber: <input style="width: 80%;" type="text"/></div> <div style="margin-bottom: 5px;"><span style="font-size: 1.2em;">i</span> Fax: <input style="width: 80%;" type="text"/></div> </div> <div style="width: 15%; text-align: center;"> <input type="button" value="Cancel"/> </div> </div> | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr style="background-color: #0056b3; color: white;"> <th style="width: 30%;">AccountNumber</th> <th style="width: 70%;">CallerIDName</th> </tr> </thead> <tbody> <tr style="background-color: #e6f2ff;"> <td>5000</td> <td>John Doe</td> </tr> <tr> <td>5001</td> <td>Stacy Green</td> </tr> <tr> <td>5002</td> <td>Tom Lin</td> </tr> <tr> <td>5003</td> <td>Ricky Chan</td> </tr> <tr> <td>5004</td> <td>Front Desk</td> </tr> <tr> <td>5005</td> <td>Warehouse</td> </tr> <tr> <td>5006</td> <td>Sales</td> </tr> <tr> <td>5007</td> <td>Tech Support</td> </tr> <tr> <td>5008</td> <td>Customer Service</td> </tr> <tr> <td>5009</td> <td>RMA</td> </tr> <tr> <td>5010</td> <td>Shipping</td> </tr> <tr> <td>5011</td> <td>Test</td> </tr> </tbody> </table> | AccountNumber | CallerIDName | 5000 | John Doe | 5001 | Stacy Green | 5002 | Tom Lin | 5003 | Ricky Chan | 5004 | Front Desk | 5005 | Warehouse | 5006 | Sales | 5007 | Tech Support | 5008 | Customer Service | 5009 | RMA | 5010 | Shipping | 5011 | Test |
| AccountNumber  | CallerIDName   |               |              |      |          |      |             |      |         |      |            |      |            |      |           |      |       |      |              |      |                  |      |     |      |          |      |      |
| 5000   | John Doe   |               |              |      |          |      |             |      |         |      |            |      |            |      |           |      |       |      |              |      |                  |      |     |      |          |      |      |
| 5001   | Stacy Green  |               |              |      |          |      |             |      |         |      |            |      |            |      |           |      |       |      |              |      |                  |      |     |      |          |      |      |
| 5002   | Tom Lin  |               |              |      |          |      |             |      |         |      |            |      |            |      |           |      |       |      |              |      |                  |      |     |      |          |      |      |
| 5003   | Ricky Chan   |               |              |      |          |      |             |      |         |      |            |      |            |      |           |      |       |      |              |      |                  |      |     |      |          |      |      |
| 5004   | Front Desk   |               |              |      |          |      |             |      |         |      |            |      |            |      |           |      |       |      |              |      |                  |      |     |      |          |      |      |
| 5005   | Warehouse  |               |              |      |          |      |             |      |         |      |            |      |            |      |           |      |       |      |              |      |                  |      |     |      |          |      |      |
| 5006   | Sales  |               |              |      |          |      |             |      |         |      |            |      |            |      |           |      |       |      |              |      |                  |      |     |      |          |      |      |
| 5007   | Tech Support   |               |              |      |          |      |             |      |         |      |            |      |            |      |           |      |       |      |              |      |                  |      |     |      |          |      |      |
| 5008   | Customer Service   |               |              |      |          |      |             |      |         |      |            |      |            |      |           |      |       |      |              |      |                  |      |     |      |          |      |      |
| 5009   | RMA  |               |              |      |          |      |             |      |         |      |            |      |            |      |           |      |       |      |              |      |                  |      |     |      |          |      |      |
| 5010   | Shipping   |               |              |      |          |      |             |      |         |      |            |      |            |      |           |      |       |      |              |      |                  |      |     |      |          |      |      |
| 5011   | Test   |               |              |      |          |      |             |      |         |      |            |      |            |      |           |      |       |      |              |      |                  |      |     |      |          |      |      |

**Figure 44: Default LDAP Phonebook Attributes**

## LDAP Phonebook

Users could use the default phonebook, edit the default phonebook, add new phonebook, import phonebook on the LDAP server as well as export phonebook from the LDAP server. The first phonebook with default phonebook dn "ou=pbx,dc=pbx,dc=com" displayed on the LDAP server page is for extensions in this PBX. Users cannot add or delete contacts directly. The contacts information will need to be modified via Web GUI->**PBX->Basic/Call Routes->Extensions** first. The default LDAP phonebook will then be updated automatically.

Settings >> LDAP Server >> LDAP Server

### LDAP Phonebook

Add
Import Phonebook
Export Selected Phonebook

Note: The first phone book is for extensions in this PBX. The contacts cannot be added or deleted directly. To add or delete the contacts, please modify the accounts in 'Extensions' page first. To modify the read-only attributes, please edit the corresponding items in 'Extension' page and the phone book will be automatically updated when the change is saved and applied. Users can add other phone books for external accounts. For those phone books, users can edit LDAP attributes, add or delete contacts directly.

| Phonebook DN                                  | Options   |
|---|---|
| <input type="checkbox"/> ou=pbx,dc=pbx,dc=com | <input type="button" value="edit"/> <input type="button" value="delete"/> |


Total: 1 Show: 1/1 Go to:  
View: 5

**Figure 45: LDAP Server->LDAP Phonebook**




- **Add new phonebook**


A new sibling phonebook of the default PBX phonebook can be added by clicking on "Add" under "LDAP Phonebook" section.

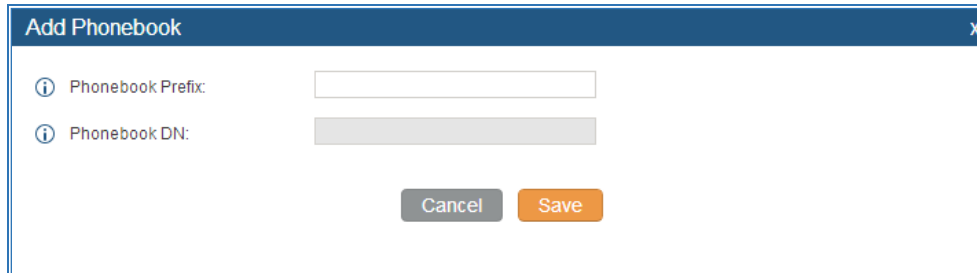


**Figure 46: Add LDAP Phonebook**

Configure the "Phonebook Prefix" first. The "Phonebook DN" will be automatically filled in. For example, if configuring "Phonebook Prefix" as "people", the "Phonebook DN" will be filled with "ou=people,dc=pbx,dc=com".

Once added, users can select  to edit the phonebook attributes and contact list (see figure below), or select

 to delete the phonebook.

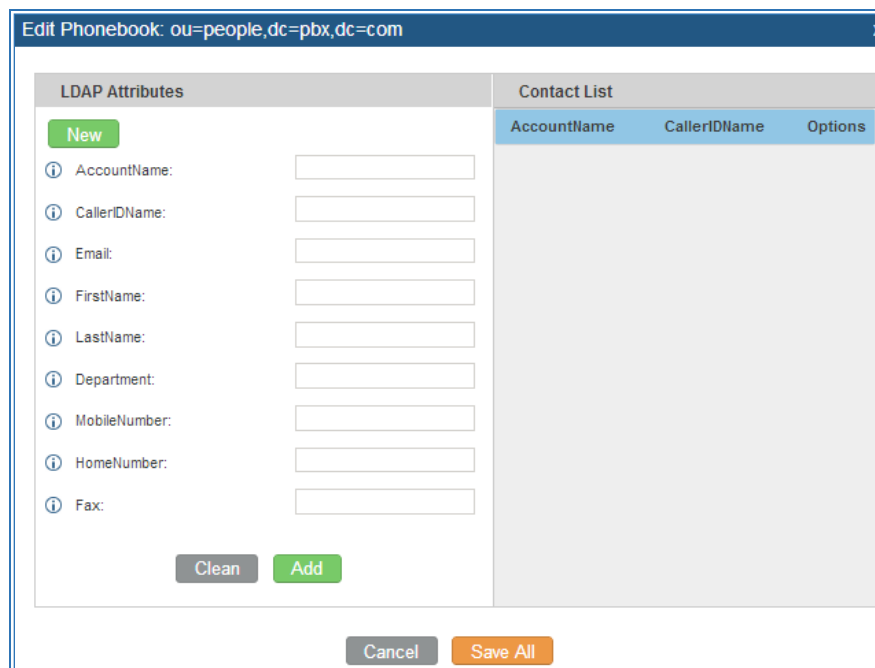


**Figure 47: Edit LDAP Phonebook**

- **Import phonebook from your computer to LDAP server**



Click on “Import Phonebook” and a dialog will prompt as shown in the figure below.

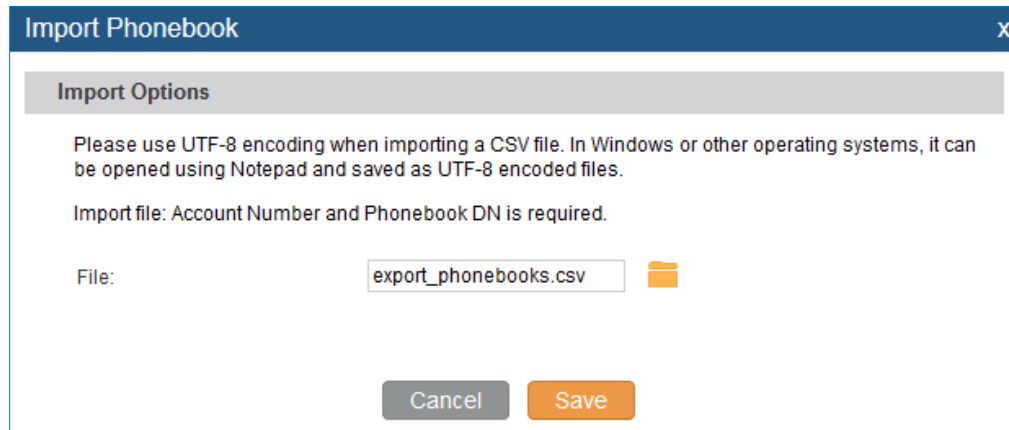

**Figure 48: Import Phonebook**

The file to be imported must be a CSV file with UTF-8 encoding. Users can open the CSV file with Notepad and save it with UTF-8 encoding.

Here is how a sample file looks like. Please note “Account Number” and “Phonebook DN” fields are required. Users could export a phonebook file from the UCM6200 LDAP phonebook section first and use it as a sample to start with.

|   | A          | B         | C              | D             | E     | F          | G             | H           | I   | J            |
|---|------------|-----------|----------------|---------------|-------|------------|---------------|-------------|-----|--------------|
| 1 | First Name | Last Name | Account Number | CallerID Name | Email | Department | Mobile Number | Home Number | Fax | Phonebook DN |
| 2 | John       | Doe       | 1001           | 1001          |       | IT         | 1001000000    |             |     | phonebook    |
| 3 | Jane       | Doe       | 1002           | 1002          |       | Sales      | 1002000000    |             |     | phonebook    |
| 4 | William    | Chung     | 1003           | 1003          |       | Marketing  | 1003000000    |             |     | phonebook    |
| 5 | Linda      | Kuo       | 1004           | 1004          |       | Accounting | 1004000000    |             |     | phonebook    |
| 6 | Steve      | Chang     | 1005           | 1005          |       | Support    | 1005000000    |             |     | others       |

**Figure 49: Phonebook CSV File Format**

The Phonebook DN field is the same “Phonebook Prefix” entry as when the user clicks on “Add” to create a new phonebook. Therefore, if the user enters “phonebook” in “Phonebook DN” field in the CSV file, the actual phonebook DN “ou=phonebook,dc=pbx,dc=com” will be automatically created by the UCM6200 once the CSV file is imported.

In the CSV file, users can specify different phonebook DN fields for different contacts. If the phonebook DN already exists on the UCM6200 LDAP Phonebook, the contacts in the CSV file will be added into the existing phonebook. If the phonebook DN doesn’t exist on the UCM6200 LDAP Phonebook, a new phonebook with this phonebook DN will be created.

The sample phonebook CSV file in above picture will result in the following LDAP phonebook in the UCM6200.



**LDAP Phonebook**

Note: The first phone book is for extensions in this PBX. The contacts cannot be added or deleted directly. To add or delete the contacts, please modify the accounts in 'Extensions' page first. To modify the read-only attributes, please edit the corresponding items in 'Extension' page and the phone book will be automatically updated when the change is saved and applied. Users can add other phone books for external accounts. For those phone books, users can edit LDAP attributes, add or delete contacts directly.

View: 5 ▾

| <input type="checkbox"/> | Phonebook DN               | Options |
|--------------------------|----------------------------|---------|
| <input type="checkbox"/> | ou=pbx,dc=pbx,dc=com       |         |
| <input type="checkbox"/> | ou=phonebook,dc=pbx,dc=com |         |
| <input type="checkbox"/> | ou=others,dc=pbx,dc=com    |         |

Total: 3 Show: 1/1 Go to:

**Figure 50: LDAP Phonebook After Import**

As the default LDAP phonebook with DN “ou=pbx,dc=pbx,dc=com” cannot be edited or deleted in LDAP phonebook section, users cannot import contacts with Phonebook DN field “pbx” if existed in the CSV file.

- **Export phonebook to your computer from UCM6200 LDAP server**

Select the checkbox for the LDAP phonebook and then click on “Export Selected Phonebook” to export the selected phonebook. The exported phonebook can be used as a record or a sample CSV file for the users to add more contacts in it and import to the UCM6200 again.

**LDAP Phonebook**

Note: The first phone book is for extensions in this PBX. The contacts cannot be added or deleted directly. To add or delete the contacts, please modify the accounts in 'Extensions' page first. To modify the read-only attributes, please edit the corresponding items in 'Extension' page and the phone book will be automatically updated when the change is saved and applied. Users can add other phone books for external accounts. For those phone books, users can edit LDAP attributes, add or delete contacts directly.

View: 5 ▾

| <input checked="" type="checkbox"/> | Phonebook DN         | Options |
|-------------------------------------|----------------------|---------|
| <input checked="" type="checkbox"/> | ou=pbx,dc=pbx,dc=com |         |

Total: 1 Show: 1/1 Go to:

**Figure 51: Export Selected LDAP Phonebook**

## LDAP Client Configurations

The configuration on LDAP client is similar when you use other LDAP servers. Here we provide an example on how to configure the LDAP client on the SIP end points to use the default PBX phonebook.

Assuming the server base dn is "dc=pbx,dc=com", configure the LDAP clients as follows (case insensitive):

**Server Address:** LDAP server IP address

**Base DN:** dc=pbx,dc=com


**User Name:** cn= “LDAP server login name”, dc=pbx, dc=com [matching LDAP server format]





**Password:** "LDAP server login password"  
**Filter:** ((CallerIDName=%)(AccountNumber=%))  
**Port:** 389

The following figure gives a sample configuration for UCM6200 acting as a LDAP client.

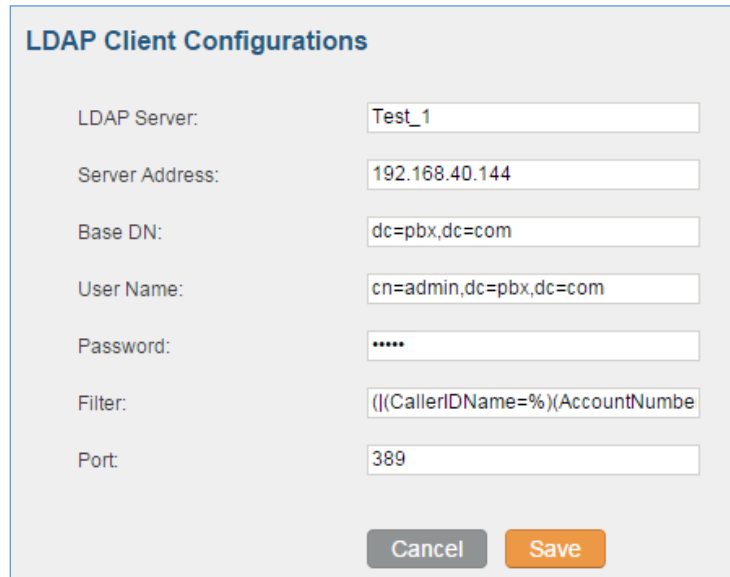

The screenshot shows a dialog box titled "LDAP Client Configurations" with the following fields and values:

|                 |                                |
|-----------------|--------------------------------|
| LDAP Server:    | Test_1                         |
| Server Address: | 192.168.40.144                 |
| Base DN:        | dc=pbx,dc=com                  |
| User Name:      | cn=admin,dc=pbx,dc=com         |
| Password:       | *****                          |
| Filter:         | ((CallerIDName=%)(AccountNumbe |
| Port:           | 389                            |

At the bottom of the dialog are "Cancel" and "Save" buttons.

**Figure 52: LDAP Client Configurations**

To configure Grandstream IP phones as the LDAP client, please refer to the following example:

**Server Address:** The IP address or domain name of the UCM6200  
**Base DN:** dc=pbx,dc=com  
**User Name:** Please leave this field empty  
**Password:** Please leave this field empty  
**LDAP Name Attribute:** CallerIDName Email Department FirstName LastName  
**LDAP Number Attribute:** AccountNumber MobileNumber HomeNumber Fax  
**LDAP Number Filter:** (AccountNumber=%)  
**LDAP Name Filter:** (CallerIDName=%)  
**LDAP Display Name:** AccountNumber CallerIDName  
**LDAP Version:** If existed, please select LDAP Version 3  
**Port:** 389

The following figure shows the configuration information on a Grandstream GXP2200 to successfully use the LDAP server as configured in **Figure 42: LDAP Server Configurations**.



|   |   |
|---|---|
| Server Address :  | <input type="text" value="192.168.40.134"/>               |
| Port :  | <input type="text" value="389"/>                          |
| Base DN :   | <input type="text" value="dc=pbx,dc=com"/>                |
| User Name :   | <input type="text"/>                                      |
| Password :  | <input type="password"/>                                  |
| LDAP Name Attributes :  | <input type="text" value="CallerIDName"/>                 |
| LDAP Number Attributes :  | <input type="text" value="AccountNumber"/>                |
| LDAP Mail Attributes :  | <input type="text"/>                                      |
| LDAP Name Filter :  | <input type="text" value="(CallerIDName=%)"/>             |
| LDAP Number Filter :  | <input type="text" value="(AccountNumber=%)"/>            |
| LDAP Mail Filter :  | <input type="text"/>                                      |
| LDAP Displaying Name Attributes :   | <input type="text" value="%AccountNumber %CallerIDName"/> |
| Max Hits :  | <input type="text" value="50"/>                           |
| Search Timeout(ms) :  | <input type="text" value="0"/>                            |
| LDAP Lookup For Dial :  | <input type="checkbox"/> Enable                           |
| LDAP Lookup For Incoming Call :   | <input type="checkbox"/> Enable                           |
| <input type="button" value="Save"/> <input type="button" value="Cancel"/> |   |

**Figure 53: GXP2200 LDAP Phonebook Configuration**

## HTTP Server

The UCM6200 embedded web server responds to HTTP/HTTPS GET/POST requests. Embedded HTML pages allow the users to configure the PBX through a Web browser such as Microsoft IE, Mozilla Firefox and Google Chrome. By default, the PBX can be accessed via HTTPS using Port 8089 (e.g., <https://192.168.40.50:8089>). Users could also change the access protocol and port as preferred under Web GUI->**Settings**->**HTTP Server**.

**Table 19: HTTP Server Settings**



|                              |   |
|------------------------------|---|
| <b>Redirect From Port 80</b> | Enable or disable redirect from port 80. On the PBX, the default access protocol is HTTPS and the default port number is 8089. When this option is enabled, the access using HTTP with Port 80 will be redirected to HTTPS with Port 8089. The default setting is "Enable". |
| <b>Protocol Type</b>         | Select HTTP or HTTPS. The default setting is "HTTPS". This is also the protocol used for zero config when the end point device downloads the config file from the UCM6200.  |
| <b>Port</b>                  | Specify port number to access the HTTP server. The default port number is 8089.   |

Once the change is saved, the web page will be redirected to the login page using the new URL. Enter the username and password to login again.

## Email settings

### Email settings


The Email application on the UCM6200 can be used to send out alert event Emails, Fax (Fax-To-Email), Voicemail (Voicemail-To-Email) and etc. The configuration parameters can be accessed via Web GUI->**Settings**->**Email Settings**->**Email Settings**.

**Table 20: Email Settings**

|                     |  |
|---------------------|--|
| <b>TLS Enable</b>   | Enable or disable TLS during transferring/submitted your Email to other SMTP server. The default setting is "Yes".   |
| <b>Type</b>         | Select Email type. <ul style="list-style-type: none"> <li>• MTA: Mail Transfer Agent. The Email will be sent from the configured domain. When MTA is selected, there is no need to set up SMTP server for it or no user login is required. However, the Emails sent from MTA might be considered as spam by the target SMTP server.</li> <li>• Client: Submit Emails to the SMTP server. A SMTP server is required and users need login with correct credentials.</li> </ul> |
| <b>Domain</b>       | Specify the domain name to be used in the Email when using type "MTA".   |
| <b>Server</b>       | Specify the SMTP server when using type "Client".  |
| <b>Username</b>     | Username is required when using type "Client". Normally it's the Email address.  |
| <b>Password</b>     | Password to login for the above Username (Email address) is required when using type "Client".   |
| <b>Display Name</b> | Specify the display name in the FROM header in the Email.  |
| <b>Sender</b>       | Specify the sender's Email address.<br>For example, pbx@example.mycompany.com.   |



The following figure shows a sample Email setting on the UCM6200, assuming the Email is using *smtp.gmail.com* as the SMTP server.

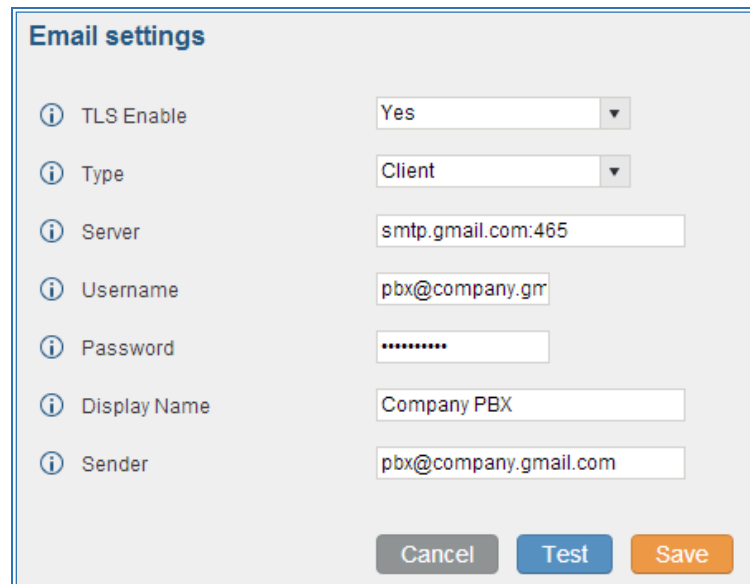









**Figure 54: UCM6200 Email Settings**

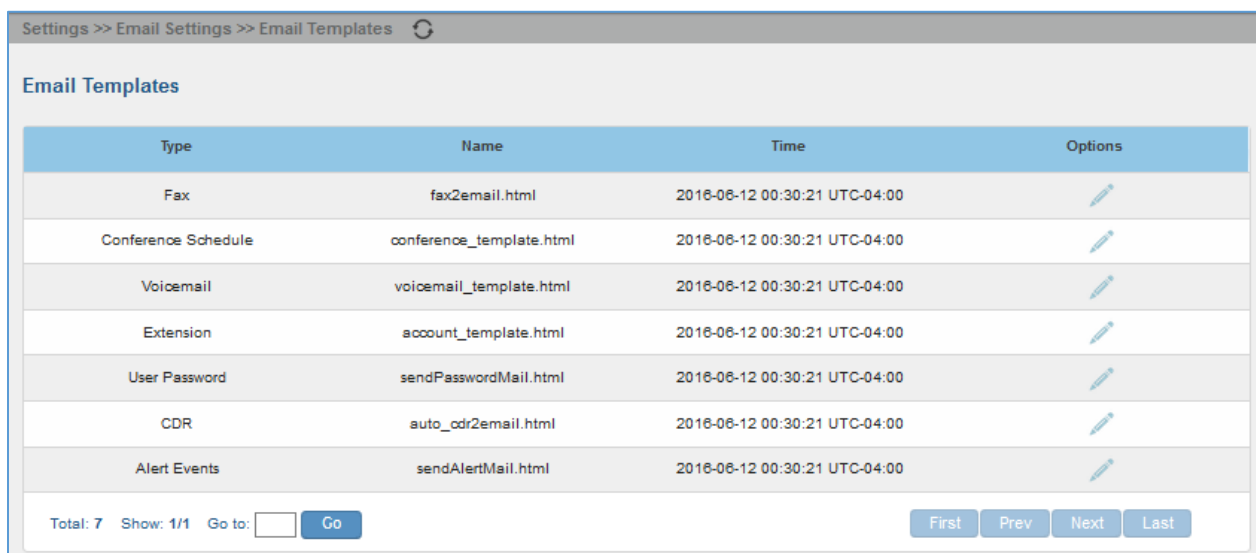Once the configuration is finished, click on "Test". In the prompt, fill in a valid Email address to send a test Email to verify the Email settings on the UCM6200.

### Email Templates

The Email templates on the UCM6200 can be used for email notification the configuration parameters can be accessed via Web GUI->**Settings->Email Settings->Email Templates**.




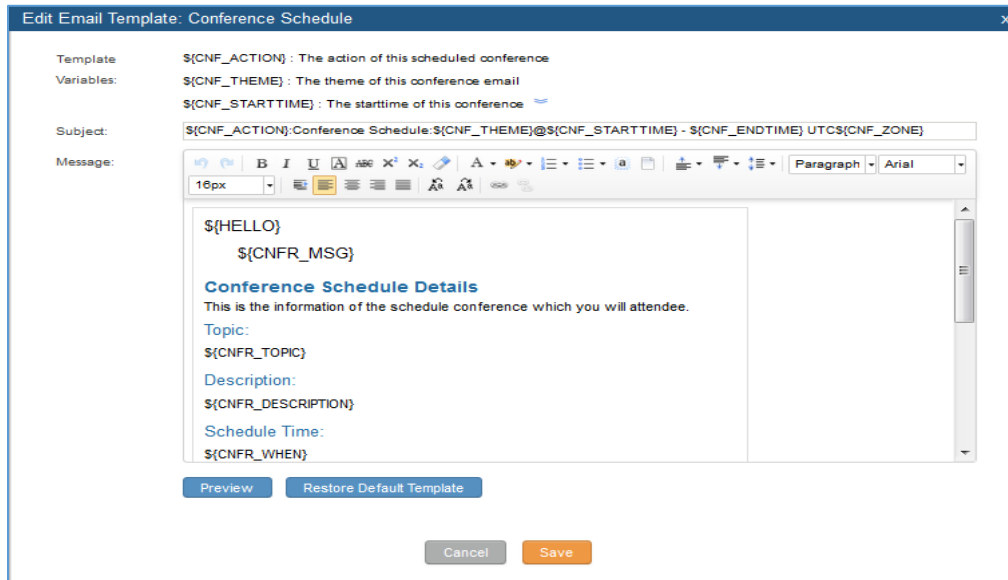
| Type                | Name                     | Time                          | Options   |
|---------------------|--------------------------|-------------------------------|---|
| Fax                 | fax2email.html           | 2016-06-12 00:30:21 UTC-04:00 |  |
| Conference Schedule | conference_template.html | 2016-06-12 00:30:21 UTC-04:00 |  |
| Voiceemail          | voicemail_template.html  | 2016-06-12 00:30:21 UTC-04:00 |  |
| Extension           | account_template.html    | 2016-06-12 00:30:21 UTC-04:00 |  |
| User Password       | sendPasswordMail.html    | 2016-06-12 00:30:21 UTC-04:00 |  |
| CDR                 | auto_cdr2email.html      | 2016-06-12 00:30:21 UTC-04:00 |  |
| Alert Events        | sendAlertMail.html       | 2016-06-12 00:30:21 UTC-04:00 |  |

Total: 7 Show: 1/1 Go to:  Go First Prev Next Last

**Figure 55: Email Templates**




To configure the email template, simply click the  button under Options column, and edit the template as desired.



**Figure 56: Conference Schedule Template**

### Email Send Log

Under UCM web UI->Settings->Email Settings->Email Send Log, users could search, filter and check whether the Email is sent out successfully or not. This page will also display the corresponding error message if the Email is not sent out successfully.

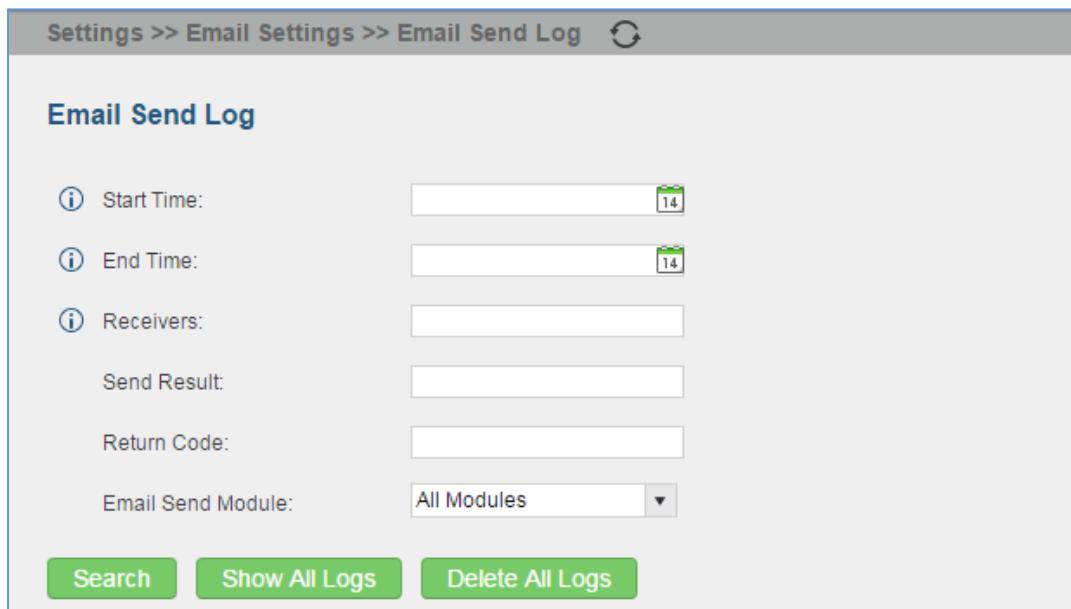

**Figure 57: Email Send log**



Table 21: Email Log

| Field             | Description  |
|-------------------|--|
| Start Time        | Enter the start time for filter  |
| End Time          | Enter the end time for filter  |
| Receivers         | Enter the email recipient, while searching for multiple recipients, please separate then with comma and no spaces.   |
| Send Result       | Enter the status of the send result to filter with   |
| Return Code       | Enter the email code to filter with  |
| Email Send Module | Select the email module to filter with from the drop down list, which contains:<br>All Modules<br>Extension<br>Voicemail<br>Conference Schedule<br>User Password<br>Alert Events<br>CDR<br>Fax<br>Test |

Email logs will be shown on bottom of The “Email Send Log” page, as shown on the following figure.




| Email Generated Time  | Email Send Module | Receivers            | Send Result | Return Code | Options   |
|--|-------------------|----------------------|-------------|-------------|---|
| 2017-02-08 10:05:27  | Test              | test@grandstream.com | sent        | 250         |  |
| 2017-01-26 07:31:57  | Extension         | test@grandstream.com | sent        | 250         |  |

Figure 58: Email Logs

## Time settings

### Auto time updating

The current system time on the UCM6200 is displayed on the upper right of the web page. It can also be found under Web GUI->**Status**->**System Status**->**General**.

To configure the UCM6200 to update time automatically, go to Web GUI->**Settings**->**Time Settings**->**Time Auto Updating**.



---

 **Note:**

The configurations under Web GUI->**Settings->Time Settings->Time Auto Updating** page require reboot to take effect. Please consider configuring auto time updating related changes when setting up the UCM6200 for the first time to avoid service interrupt after installation and deployment in production.

---

**Table 22: Time Auto Updating**

|                               |  |
|-------------------------------|--|
| <b>Remote NTP Server</b>      | Specify the URL or IP address of the NTP server for the UCM6200 to synchronize the date and time. The default NTP server is ntp.ipvideotalk.com.   |
| <b>Enable DHCP Option 2</b>   | If set to "Yes", the UCM6200 is allowed to get provisioned for Time Zone from DHCP Option 2 in the local server automatically. The default setting is "Yes".   |
| <b>Enable DHCP Option 42</b>  | If set to "Yes", the UCM6200 is allowed to get provisioned for NTP Server from DHCP Option 42 in the local server automatically. This will override the manually configured NTP Server. The default setting is "Yes".  |
| <b>Time Zone</b>              | <p>Select the proper time zone option so the UCM6200 can display correct time accordingly.</p> <p>If "Self-Defined Tome Zone" is selected, please specify the time zone parameters in "Self-Defined Time Zone" field as described in below option.</p>   |
| <b>Self-Defined Time Zone</b> | <p>If "Self-Defined Time Zone" is selected in "Time Zone" option, users will need define their own time zone following the format below.</p> <p>The syntax is: std offset dst [offset], start [/time], end [/time]<br/>         Default is set to: MTZ+6MDT+5,M4.1.0,M11.1.0</p> <p><b>MTZ+6MDT+5</b><br/>         This indicates a time zone with 6 hours offset and 1 hour ahead for DST, which is U.S central time. If it is positive (+), the local time zone is west of the Prime Meridian (A.K.A: International or Greenwich Meridian); If it is negative (-), the local time zone is east.</p> <p><b>M4.1.0,M11.1.0</b><br/>         The 1st number indicates Month: 1,2,3..., 12 (for Jan, Feb, ..., Dec).</p> |



The 2nd number indicates the nth iteration of the weekday: (1st Sunday, 3rd Tuesday...). Normally 1, 2, 3, 4 are used. If 5 is used, it means the last iteration of the weekday.

The 3rd number indicates weekday: 0,1,2,...,6 ( for Sun, Mon, Tues, ... ,Sat).

Therefore, this example is the DST which starts from the First Sunday of April to the 1st Sunday of November.

## Set Time Manually

To manually set the time on the UCM6200, go to Web UI->**Settings->Time Settings->Set Time Manually**. The format is YYYY-MM-DD HH:MI:SS.

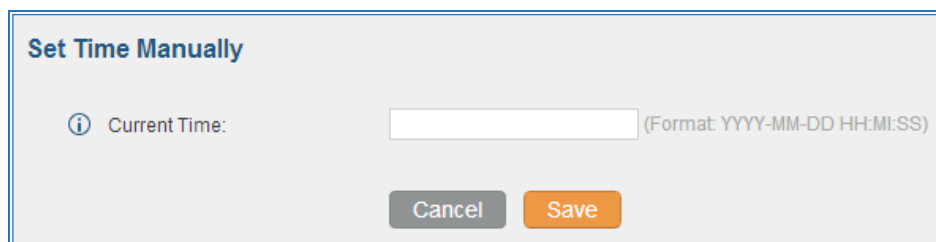


Figure 59: Set Time Manually

---

### Note:

Manually setup time will take effect immediately after saving and applying change in the web UI. If users would like to reboot the UCM6200 and keep the manually setup time setting, please make sure "Remote NTP Server", "Enable DHCP Option 2" and "Enable DHCP Option 42" options under Web GUI->**Settings->Time Settings->Time Auto Updating** page are unchecked or set to empty. Otherwise, time auto updating settings in this page will take effect after reboot.


---

## Office Time

On the UCM6200, the system administrator can define "office time", which can be used to configure time condition for extension call forwarding schedule and inbound rule schedule. To configure office time, go to Web UI->**Settings->Time Settings->Office Time**. Click on "Create New Office Time" to create an office time.





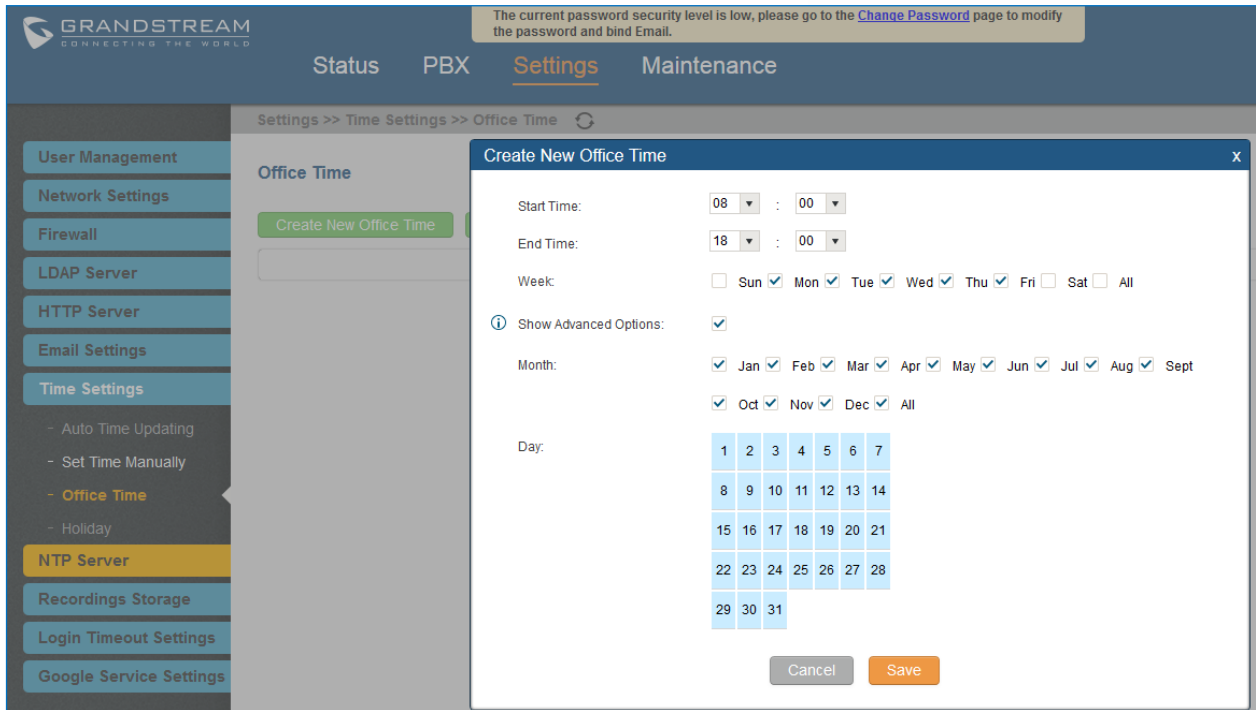


**Figure 60: Create New Office Time**

**Table 23: Create New Office Time**



|                              |   |
|------------------------------|---|
| <b>Start Time</b>            | Configure the start time for office hour.   |
| <b>End Time</b>              | Configure the end time for office hour  |
| <b>Week</b>                  | Select the work days in one week.   |
| <b>Show Advanced Options</b> | Check this options to show advanced options. Once selected, please specify "Month" and "Day" below. |
| <b>Month</b>                 | Select the months for office time.  |
| <b>Day</b>                   | Select the work days in one month.  |

Select "Start Time", "End Time" and the day for the "Week" for the office time. The system administrator can also define month and day of the month as advanced options. Once done, click on "Save" and then "Apply Change" for the office time to take effect. The office time will be listed in the web page as the figure shows below.

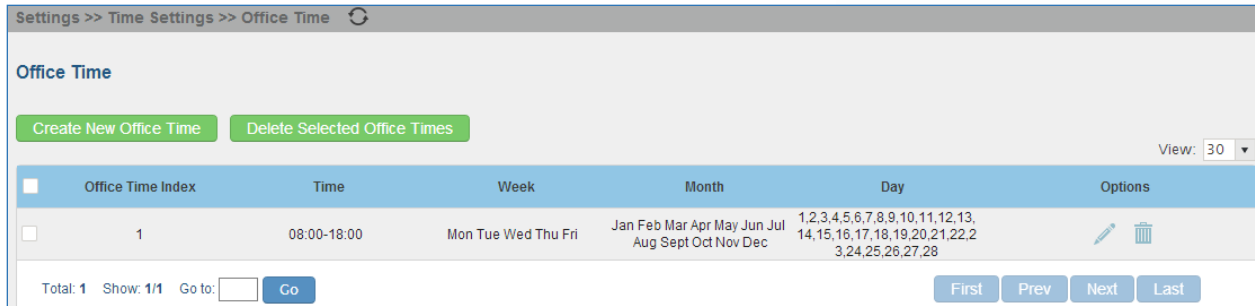




**Figure 61: Settings->Time Settings->Office Time**

- Click on  to edit the office time.
- Click on  to delete the office time.
- Click on "Delete Selected Office Times" to delete multiple selected office times at once.

## Holiday

On the UCM6200, the system administrator can define "holiday", which can be used to configure time condition for extension call forwarding schedule and inbound rule schedule. To configure holiday, go to Web UI->**Settings->Time Settings->Holiday**. Click on "Create New Holiday" to create holiday time.

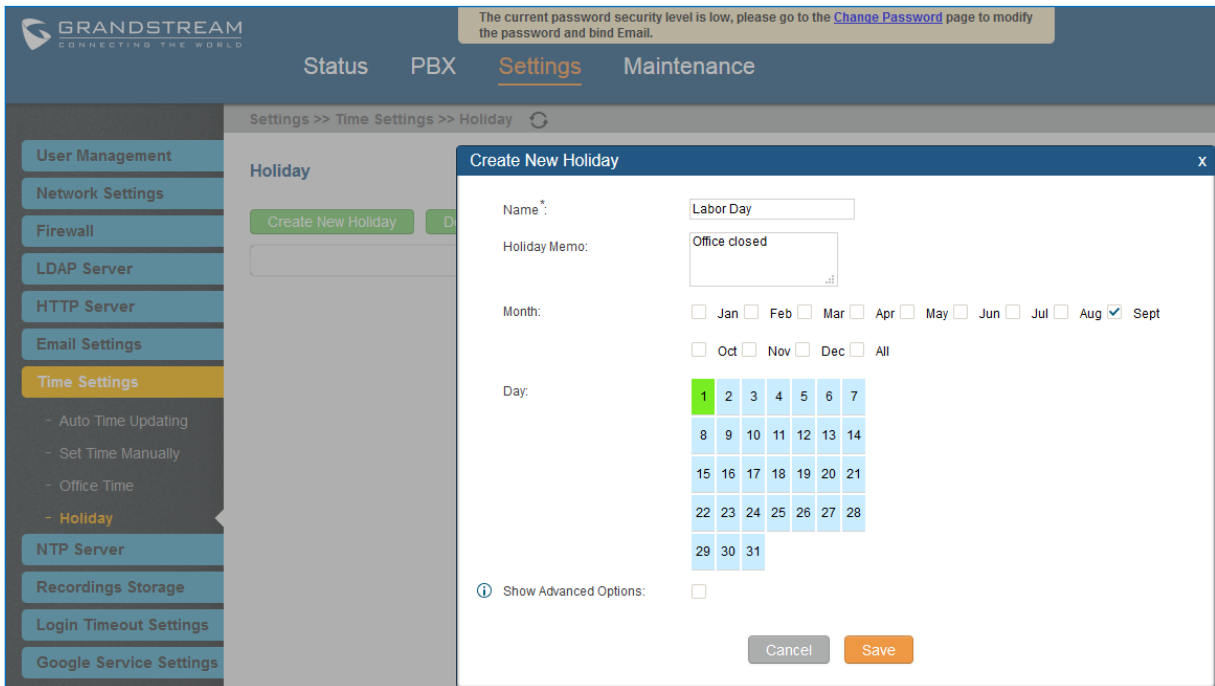


**Figure 62: Create New Holiday**

**Table 24: Create New Holiday**





|                              |  |
|------------------------------|--|
| <b>Name</b>                  | Specify the holiday name to identify this holiday.   |
| <b>Holiday Memo</b>          | Create a note for the holiday.   |
| <b>Month</b>                 | Select the month for the holiday.  |
| <b>Day</b>                   | Select the day for the holiday.  |
| <b>Show Advanced Options</b> | Check this option to show advanced options. If selected, please specify the days as holiday in one week below. |
| <b>Week</b>                  | Select the days as holiday in one week.  |

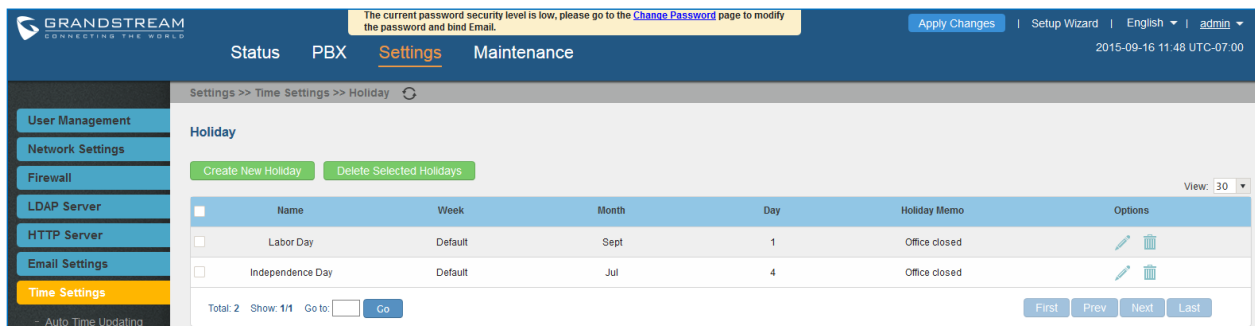Enter holiday "Name" and "Holiday Memo" for the new holiday. Then select "Month" and "Day". The system administrator can also define days in one week as advanced options. Once done, click on "Save" and then "Apply Change" for the holiday to take effect. The holiday will be listed in the web page as the figure shows below.



**Figure 63: Settings->Time Settings->Holiday**

- Click on  to edit the holiday.
- Click on  to delete the holiday.
- Click on "Delete Selected Holidays" to delete multiple selected holidays at once.

---

 **Note:**

For more details on how to use office time and holiday, please refer to the link below:

[http://www.grandstream.com/sites/default/files/Resources/How to use office time and holiday UCM6100.pdf](http://www.grandstream.com/sites/default/files/Resources/How%20to%20use%20office%20time%20and%20holiday%20UCM6100.pdf)

---



## NTP Server

The UCM6200 can be used as a NTP server for the NTP clients to synchronize their time with. To configure the UCM6200 as the NTP server, set "Enable NTP server" to "Yes" under web GUI->**Settings->NTP Server**. On the client side, point the NTP server address to the UCM6200 IP address or host name to use the UCM6200 as the NTP server.

## Recordings Storage

The UCM6200 supports call recordings automatically or manually and the recording files can be saved in external storage plugged in the UCM6200 or on the UCM6200 locally. To manage the recording storage, users can go to UCM6200 web GUI->**Settings->Recordings Storage** page and select whether to store the recording files in USB Disk, SD card or locally on the UCM6200.


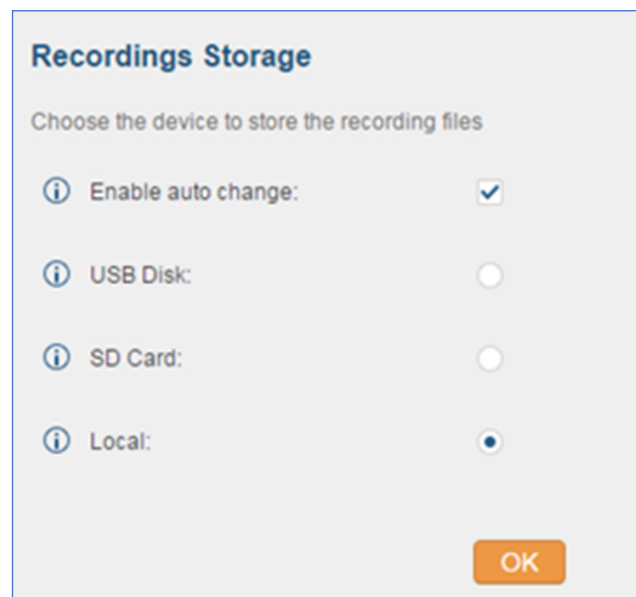


Figure 64: Settings->Recordings Storage

- If "Enable Auto Change" is selected, the recording files will be automatically saved in the available USB Disk or SD card plugged into the UCM6200. If both USB Disk and SD card are plugged in, the recording files will be always saved in the USB Disk.
- If "Local" is selected, the recordings will be stored in UCM6200 internal storage.
- If "USB Disk" or "SD Card" is selected, the recordings will be stored in the corresponding plugged in external storage device. Please note the options "USB Disk" and "SD Card" will be displayed only if they are plugged into the UCM6200.




Once “USB Disk” or “SD Card” is selected, click on “OK”. The user will be prompted to confirm to copy the local files to the external storage device.

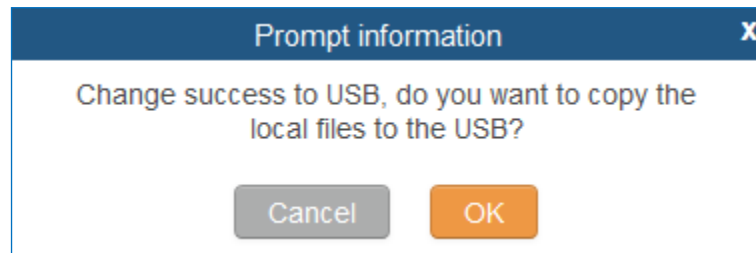

**Figure 65: Recordings Storage Prompt Information**

Click on “OK” to continue. The users will be prompted a new dialog to select the categories for the files to be copied over.

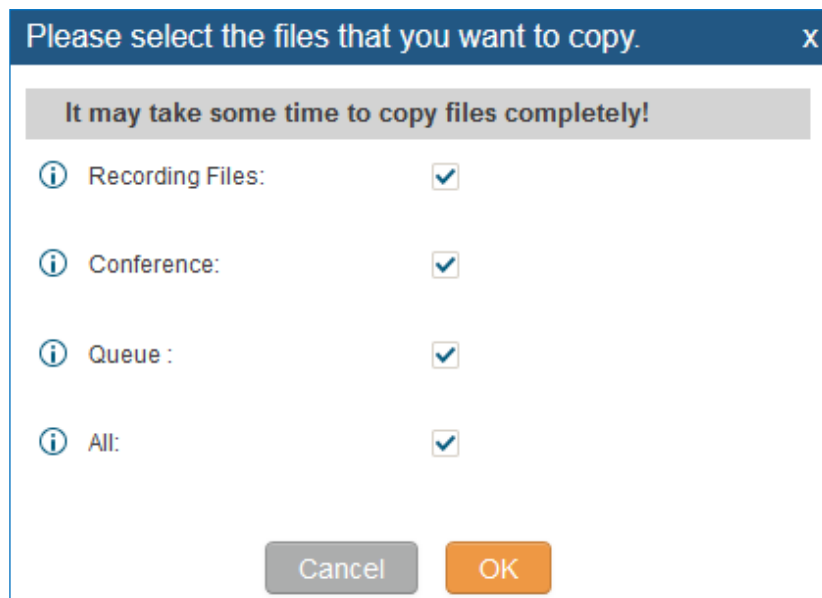

**Figure 66: Recording Storage Category**

On the UCM6200, recording files are generated and exist in 3 categories: normal call recording files, conference recording files, and call queue recording files. Therefore, users have the following options when select the categories to copy the files to the external device:

- Recording Files: Copy the normal recording files to the external device.
- Conference: Copy the conference recording files to the external device.
- Queue: Copy the call queue recording files to the external device.
- All: Copy all recording files to the external device.



## Login Settings

After the user logs in the UCM6200 web UI, the user will be automatically logged out after certain timeout, or he/she can be banned for a specific period if the login timeout is exceeded. Those values can be specified under UCM6200 web GUI->**Settings->Login Timeout Settings** page.

The **“User Login Timeout”** value is in minute and the default setting is 10 minutes. If the user doesn’t make any operation on web UI within the timeout, the user will be logged out automatically. After that, the web UI will be redirected to the login page and the user will need to enter username and password to log in.


If set to 0, there is no timeout for the web UI login session and the user will not be automatically logged out.

**“User max number of try login”** can prevent the UCM6200 from brutal force decryption, if this number is exceeded user IP address will be banned from accessing the UCM for a period of time based on user configuration, the default value is 5.

**“User prevent login time”** specify the period of time in minutes an IP will banned from accessing the UCM if the User max number of try login is exceeded, the default value is 5.

**“Login Banned User List”** show the list of IP’s banned from the UCM.

**“Login White List”** User can add a list of IP’s to avoid the above restriction, thus, they can exceed the User max number of try login.

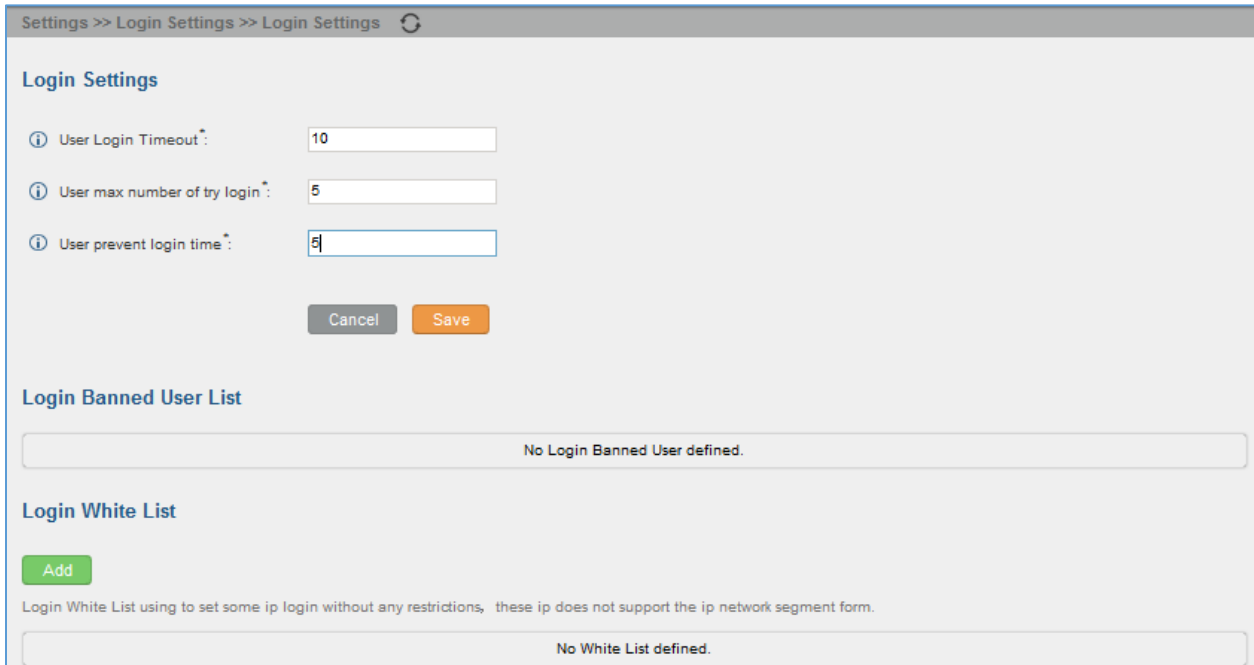

Settings >> Login Settings >> Login Settings

### Login Settings

ⓘ User Login Timeout:   
 ⓘ User max number of try login:   
 ⓘ User prevent login time:

### Login Banned User List

No Login Banned User defined.

### Login White List

Login White List using to set some ip login without any restrictions, these ip does not support the ip network segment form.

No White List defined.


Figure 67: Login Timeout Settings



## Google Service Settings Support

UCM6200 now supports Google OAuth 2.0 authentication. This feature is used for supporting UCM6200 conference scheduling system. Once OAuth 2.0 is enabled, UCM6200 conference system can access Google calendar to schedule or update conference.

Google Service Settings can be found under web GUI-> **Settings-> Google Service Settings-> Google Service Settings.**

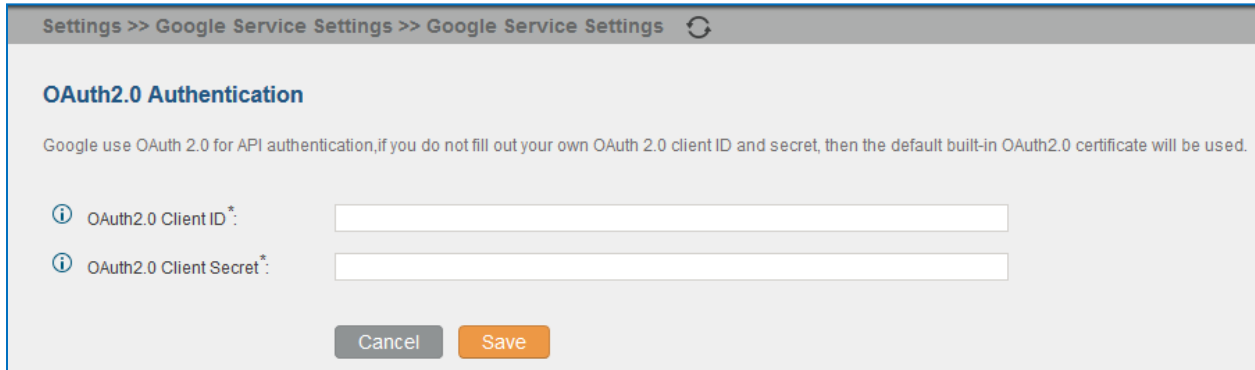

The screenshot shows a web browser window with the address bar displaying "Settings >> Google Service Settings >> Google Service Settings". The main content area is titled "OAuth2.0 Authentication" and contains the following text: "Google use OAuth 2.0 for API authentication, if you do not fill out your own OAuth 2.0 client ID and secret, then the default built-in OAuth2.0 certificate will be used." Below this text are two input fields: "OAuth2.0 Client ID\*" and "OAuth2.0 Client Secret\*", each with an information icon to its left. At the bottom of the form are two buttons: "Cancel" and "Save".

**Figure 68: Google Service Settings->OAuth2.0 Authentication**

If you already have OAuth2.0 project set up on **Google Developers** web page, please use your existing login credential for "OAuth2.0 Client ID" and "OAuth2.0 Client Secret" in the above figure for the UCM6200 to access Google Service.

If you do not have OAuth2.0 project set up yet, please following the steps below to create new project and obtain credentials:

1. Go to Google Developers page <https://console.developers.google.com/start> Create a New Project in Google Developers page.



### New Project

Project name ?

Your project ID will be animated-surfer-112001 ? [Edit](#)

[Show advanced options...](#)


Please email me updates regarding feature announcements, performance suggestions, feedback surveys and special offers.

Yes  No

I agree that my use of any [services and related APIs](#) is subject to my compliance with the applicable [Terms of Service](#).

**Figure 69: Google Service->New Project**

2. Enable Calendar API from API Library.
3. Click “Credentials” on the left drop down menu to create new OAuth2.0 login credentials.

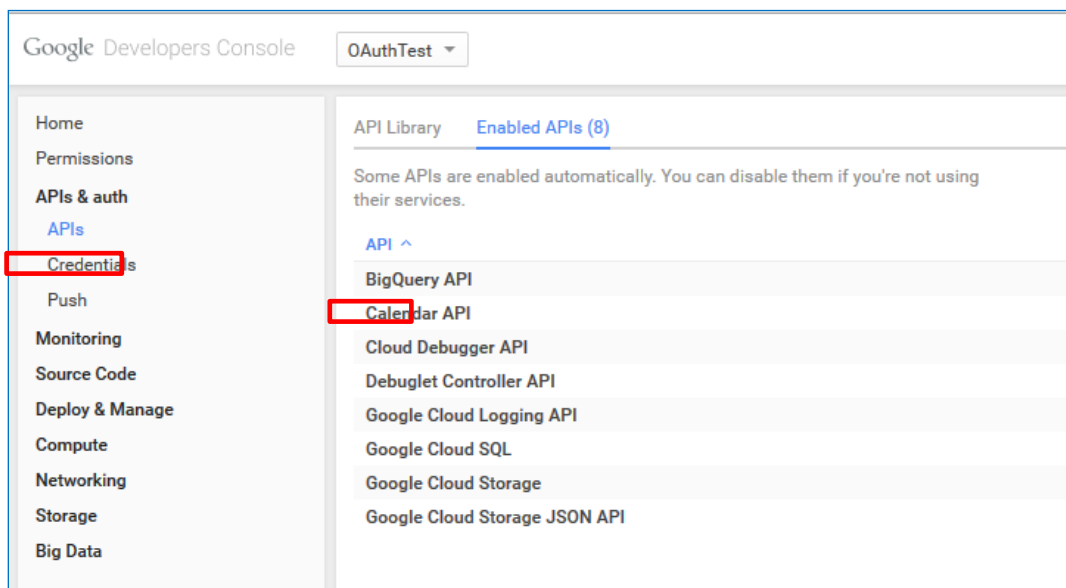

**Figure 70: Google Service->Create New Credential**

4. Use the newly created login credential to fill in “OAuth2.0 Client ID” and “OAuth2.0 Client Secret”.
5. Click “Get Authentication Code” to obtain authentication code from Google Service.





### Google Calendar Authorization

1. Click 'Get Authorization Code'.
2. Enter the Google account and password (Note: please make sure the account on authorization page is correct, if you have logged in other account, please log out then log in again).
3. Click 'Accept' on authorization page.
4. Copy the string to the Authorization code input box, click the 'authorize' button.

① Authorization Code \* :

① Authorized Account:

Please allow a new window to open, if the window is not open, please open the following link to obtain the authorization code: [Get Authorization Code](#)

**Figure 71: Google Service->OAuth2.0 Login**

6. Now UCM6200 is connected with Google Service.

You can also configure the Status update, which refresh automatically your Google Calendar with the configured time (m). **Note:** Zero means disable.

### Google Calendar Settings

① Status update \* :



# PROVISIONING

## Overview

Grandstream SIP Devices can be configured via Web interface as well as via configuration file through TFTP/HTTP/HTTPS download. All Grandstream SIP devices support a proprietary binary format configuration file and XML format configuration file. The UCM6200 provides a Plug and Play mechanism to auto-provision the Grandstream SIP devices in a zero configuration manner by generating XML config file and having the phone to download it within LAN area. This allows users to finish the installation with ease and start using the SIP devices in a managed way.

To provision a phone, three steps are involved, i.e., discovery, configuration and provisioning. This section explains how Zero Config works on the UCM6200. The settings for this feature can be accessed via Web UI->**PBX->Zero Config**.


## Configuration Architecture for End Point Device

Started from firmware version 1.0.7.10, the end point device configuration in zero config is divided into the following three layers with priority from the lowest to the highest:

- **Global**  
This is the lowest layer. Users can configure the most basic options that could apply to all Grandstream SIP devices during provisioning via Zero config.
- **Model**  
In this layer, users can define model-specific options for the configuration template.
- **Device**  
This is the highest layer. Users can configure device-specific options for the configuration for individual device here.

Each layer also has its own structure in different levels. Please see figure below. The details for each layer are explained in sections **[Global configuration]**, **[Model configuration]** and **[Device Configuration]**.



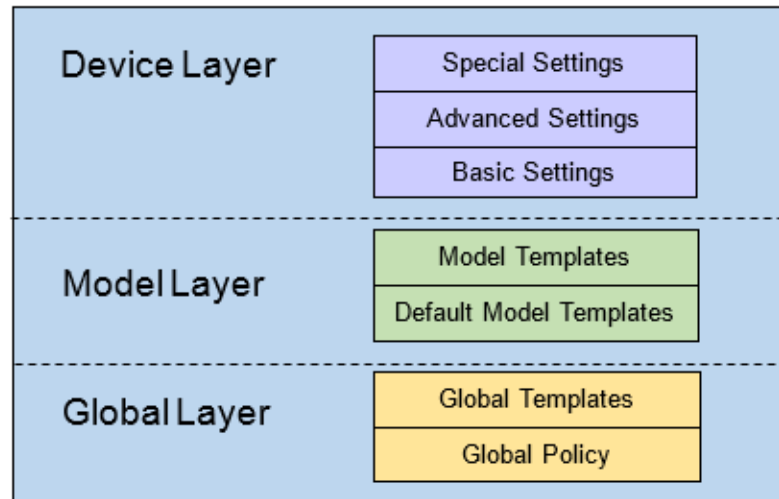

**Figure 72: Zero Config Configuration Architecture for End Point Device**

The configuration options in model layer and device layer have all the option in global layers already, i.e., the options in global layer is a subset of the options in model layer and device layer. If an option is set in all three layers with different values, the highest layer value will override the value in lower layer. For example, if the user selects English for Language setting in Global Policy and Spanish for Language setting in Default Model Template, the language setting on the device to be provisioned will use Spanish as model layer has higher priority than global layer. To sum up, **configurations in higher layer will always override the configurations for the same options/fields in the lower layer when presented at the same time.**

After understanding the zero config configuration architecture, users could configure the available options for end point devices to be provisioned by the UCM6200 by going through the three layers. This configuration architecture allows users to set up and manage the Grandstream end point devices in the same LAN area in a centralized way.

### **Auto Provisioning Settings**

By default, the Zero Config feature is enabled on the UCM6200 for auto provisioning. Three methods of auto provisioning are used.



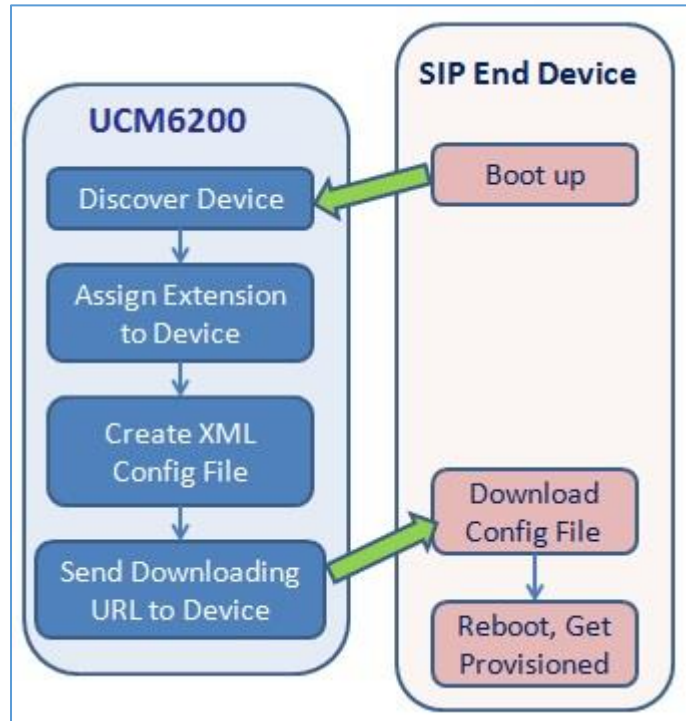


Figure 73: UCM6200 Zero Config

- **SIP SUBSCRIBE**

When the phone boots up, it sends out SUBSCRIBE to a multicast IP address in the LAN. The UCM6200 discovers it and then sends a NOTIFY with the XML config file URL in the message body. The phone will then use the path to download the config file generated in the UCM6200 and take the new configuration.

- **DHCP OPTION 66**


Route mode need to be set to use this feature. When the phone restarts (by default DHCP Option 66 is turned on), it will send out a DHCP DISCOVER request. The UCM6200 receives it and returns DHCP OFFER with the config server path URL in Option 66, for example, <https://192.168.2.1:8089/zccgi/>. The phone will then use the path to download the config file generated in the UCM6200.

- **mDNS**

When the phone boots up, it sends out mDNS query to get the TFTP server address. The UCM6200 will respond with its own address. The phone will then send TFTP request to download the XML config file from the UCM6200.


To start the auto provisioning process, under Web GUI->**PBX->Zero Config->Zero Config Settings**, fill in the auto provision information.



PBX >> Zero Config >> Zero Config Settings 


### Zero Config Settings


Enable Zero Config:


 Enable Automatic Configuration Assignment:


#### Extension Assignment


Auto provision automatically provides an extension to the device. There are two methods of auto provision: SIP SUBSCRIBE and DHCP Option 66. For example, when the device boots up, it will send SIP SUBSCRIBE multicast in the LAN. The PBX will find it, create an account and return a URL of the config file for the device to download.

 Auto Assign Extension:




 Zero Config Extension Segment: 5000 - 6299 [Zero Config Extension Segment](#)

 Enable Pick Extension:

 Pick Extension Segment: 4000 - 4999 [Pick Extension Segment](#)

 Pick Extension Period (hour)\*:

#### Network Settings

 Subnet Whitelist:    

**Figure 74: Auto Provision Settings**

**Table 25: Auto Provision Settings**

|  |  |
|--|--|
| <b>Enable Zero Config</b>                        | Enable or disable the zero config feature on the PBX. The default setting is enabled.  |
| <b>Enable Automatic Configuration Assignment</b> | By default, this is disabled. If disabled, when SIP device boots up, the UCM6200 will not send the SIP device the URL to download the config file and therefore the SIP device will not be automatically provisioned by the UCM6200.<br><br><b>Note:</b><br>When disabled, SIP devices can still be provisioned by manually sending NOTIFY from the UCM6200 which will include the XML config file URL for the SIP device to download. |
| <b>Automatically Assign Extension</b>            | If enabled, when the device is discovered, the PBX will automatically assign an extension within the range defined in "Zero Config Extension Segment" to the device. The default setting is disabled.  |
| <b>Zero Config Extension Segment</b>             | Click on the link "Zero Config Extension Segment" to specify the extension range to be assigned if "Automatically Assign Extension" is enabled. The default range is 5000-6299. Zero Config Extension Segment range can be   |



|                                     |  |
|-------------------------------------|--|
|                                     | defined in web UI-> <b>PBX-&gt;Internal Options-&gt;General</b> page->Extension Preference section: "Auto Provision Extensions".   |
| <b>Enable Pick Extension</b>        | If enabled, the extension list will be sent out to the device after receiving the device's request. This feature is for the GXP series phones that support selecting extension to be provisioned via phone's LCD. The default setting is disabled.   |
| <b>Pick Extension Segment</b>       | Click on the link "Pick Extension Segment" to specify the extension list to be sent to the device. The default range is 4000 to 4999. Pick Extension Segment range can be defined in web UI-> <b>PBX-&gt;Internal Options-&gt;General</b> page->Extension Preference section: "Pick Extensions". |
| <b>Pick Extension Period (hour)</b> | Specify the number of minutes to allow the phones being provisioned to pick extensions.  |
| <b>Subnet Whitelist</b>             | This feature allows the UCM to provision devices in different subnets. The devices in the Subnet Whitelist can be provisioned via UCM zero config.   |

Please make sure an extension is manually assigned to the phone or "Automatically Assign Extension" is enabled during provisioning. After the configuration on the UCM6200 web GUI, click on "Save" and "Apply Changes". Once the phone boots up and picks up the config file from the UCM6200, it will take the configuration right away.

## Discovery

Users could manually discover the device by specifying the IP address or scanning the entire LAN network. Three methods are supported to scan the devices.

- PING
- ARP
- SIP Message (NOTIFY)

Click on "Auto Discover" under web **UI-> PBX-> Zero Config->Zero Config**, fill in the "Scan Method" and "Scan IP". The IP address segment will be automatically filled in based on the network mask detected on the UCM6200. If users need scan the entire network segment, enter 255 (for example, 192.168.40.255) instead of a specific IP address. Then click on "Save" to start discovering the devices within the same network. To successfully discover the devices, "Zero Config" needs to be enabled on the UCM6200 web GUI->**PBX->Zero Config->Auto Provisioning Settings**.



Auto Discover
X

The PBX can automatically discover the new devices by ARP or PING. It can scan the entire network segment or a single IP address.

**i** PBX LAN/LAN1 Address: 192.168.5.127

**i** Network Segment: 192.168.5.0 - 192.168.5.255

**i** Broadcast IP: 192.168.5.255

**i** Scan Method:

**i** Scan IP\*:  .  .  .

**Figure 75: Auto Discover**

The following figure shows a list of discovered phones. The MAC address, IP Address, Extension (if assigned), Version, Vendor, Model, Connection Status, Create Config, Options (Edit /Delete /Update /Reboot /Access Device WebGUI) are displayed in the list.

| <input type="checkbox"/> | MAC Address  | IP Address    | Extension | Version   | Vendor      | Model   | Create Config | Options |
|--------------------------|--------------|---------------|-----------|-----------|-------------|---------|---------------|---------|
| <input type="checkbox"/> | 000B825C59CD | 192.168.5.137 | --        | 1.0.7.12  | GRANDSTREAM | GXP2140 | --            |         |
| <input type="checkbox"/> | 000B826B1355 | 192.168.5.135 | --        | 1.0.3.92  | GRANDSTREAM | GXV3240 | --            |         |
| <input type="checkbox"/> | 000B826B24FE | 192.168.5.121 | --        | 1.0.3.107 | GRANDSTREAM | GXV3275 | --            |         |
| <input type="checkbox"/> | 000B8271B249 | 192.168.5.101 | --        | 1.0.3.28  | GRANDSTREAM | GXP1625 | --            |         |
| <input type="checkbox"/> | 000B8273C40A | 192.168.5.100 | --        | 1.0.7.25  | GRANDSTREAM | GXP2130 | --            |         |
| <input type="checkbox"/> | 000B827846B1 | 192.168.5.142 | --        | 1.0.3.28  | GRANDSTREAM | GXP1628 | --            |         |

**Figure 76: Discovered Devices**

## Global configuration

### Global policy

Global configuration will apply to all the connected Grandstream SIP end point devices in the same LAN with the UCM6200 no matter what the Grandstream device model it is. It is divided into two levels:

- Web UI->**PBX->Zero Config->Global Policy**
- Web UI->**PBX->Zero Config->Global Templates.**




- **Global Templates** configuration has higher priority to **Global Policy** configuration.

Global Policy can be accessed in web GUI->**PBX->Zero Config->Global Policy** page. On the top of the configuration table, users can select category in the "Options" dropdown list to quickly navigate to the category. The categories are:

- **Localization**: configure display language, data and time.
- **Phone Settings**: configure dial plan, call features, NAT, call progress tones and etc.
- **Contact List**: configure LDAP and XML phonebook download.
- **Maintenance**: configure upgrading, web access, Telnet/SSH access and syslog.
- **Network Settings**: configure IP address, QoS and STUN settings.
- **Customization**: customize LCD screen wallpaper for the supported models.

Select the checkbox on the left of the parameter you would like to configure to active the dropdown list for this parameter.

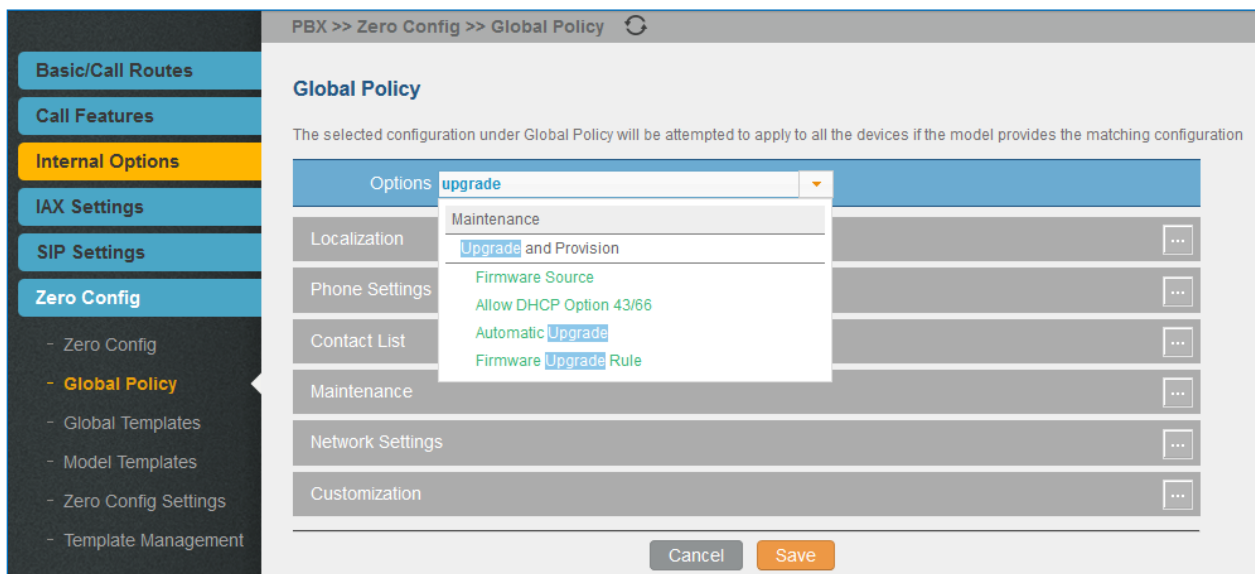

**Figure 77: Global Policy Categories**

The following tables list the Global Policy configuration parameters for the SIP end device.

**Table 26: Global Policy Parameters->Localization**

| Language settings  |   |
|--------------------|---|
| <b>Language</b>    | Select the LCD display language on the SIP end device.                          |
| Date and Time      |   |
| <b>Date Format</b> | Configure the date display format on the SIP end device's LCD.                  |
| <b>Time Format</b> | Configure the time display in 12-hour or 24-hour format on the SIP end device's |





|                   |   |
|-------------------|---|
|                   | LCD.  |
| <b>NTP Server</b> | Configure the URL or IP address of the NTP server. The SIP end device may obtain the date and time from the server. |
| <b>Time Zone</b>  | Configure the time zone used on the SIP end device.   |

**Table 27: Global Policy Parameters->Phone Settings**

| <b>Default Call Settings</b>    |  |
|---------------------------------|--|
| <b>Dial Plan</b>                | Configure the default dial plan rule. For syntax and examples, please refer to user manual of the SIP devices to be provisioned for more details.  |
| <b>Enable Call Features</b>     | When enabled, "Do Not Disturb", "Call Forward" and other call features can be used via the local feature code on the phone. Otherwise, the ITSP feature code will be used.   |
| <b>Use # as Dial Key</b>        | If set to "Yes", pressing the number key "#" will immediately dial out the input digits.   |
| <b>Auto Answer by Call-info</b> | If set to "Yes", the phone will automatically turn on the speaker phone to answer incoming calls after a short reminding beep, based on the SIP Call-Info header sent from the server/proxy.<br>The default setting is enabled.  |
| <b>NAT Traversal</b>            | Configure which NAT traversal mechanism will be enabled on the endpoint device.<br>If set to "STUN" and STUN server is configured, the phone system will periodically send STUN message to the SUTN server to get the public IP address of its NAT environment and keep the NAT port open. STUN will not work if the NAT is symmetric type.<br>If set to "Keep-alive", the phone system will send the STUN packets to maintain the connection that is first established during registration of the phone. The "Keep-alive" packets will fool the NAT device into keeping the connection open and this allows the host server to send SIP requests directly to the registered phone.<br>If it needs to use OpenVPN to connect host server, it needs to set it to "VPN".<br>If the firewall and the SIP device behind the firewall are both able to use UPNP, it can be set to "UPNP". The both parties will negotiate to use which port to allow SIP through.<br>The default setting is "Keep-alive". |
| <b>Use Random Port</b>          | Configure whether to allow the endpoint device to use random ports for both SIP and RTP messages. This is usually necessary when multiple phones are behind the same full cone NAT. The default setting is "No". Note: This parameter must be set to "No" for Direct IP Calling to work.   |



| General Settings           |  |
|----------------------------|--|
| <b>Call Progress Tones</b> | Configure call progress tones including ring tone, dial tone, second dial tone, message waiting tone, ring back tone, call waiting tone, busy tone and reorder tone using the following syntax:<br>f1=val, f2=val[, c=on1/ off1[- on2/ off2[- on3/ off3]]]; <ul style="list-style-type: none"> <li>• Frequencies are in Hz and cadence on and off are in 10ms).</li> <li>• “on” is the period (in ms) of ringing while “off” is the period of silence. Up to three cadences are supported.</li> <li>• Please refer to user manual of the SIP devices to be provisioned for more details</li> </ul> |
| <b>HEADSET Key Mode</b>    | Select “Default Mode” or “Toggle Headset/Speaker” for the Headset key. Please refer to user manual of the SIP devices to be provisioned for more details.  |

Table 28: Global Policy Parameters->Contact List

| LDAP Phonebook        |  |
|-----------------------|--|
| <b>Source</b>         | Select "Manual" or "PBX" as the LDAP configuration source. <ul style="list-style-type: none"> <li>• If "Manual" is selected, the LDAP configuration below will be applied to the SIP end device.</li> <li>• If "PBX" is selected, the LDAP configuration built-in from UCM6200 web UI-&gt;<b>Settings</b>-&gt;<b>LDAP Server</b> will be applied.</li> </ul> |
| <b>Address</b>        | Configure the IP address or DNS name of the LDAP server.   |
| <b>Port</b>           | Configure the LDAP server port. The default value is 389.  |
| <b>Base DN</b>        | This is the location in the directory where the search is requested to begin. Example: <ul style="list-style-type: none"> <li>• dc=grandstream, dc=com</li> <li>• ou=Boston, dc=grandstream, dc=com</li> </ul>   |
| <b>User Name</b>      | Configure the bind "Username" for querying LDAP servers. The field can be left blank if the LDAP server allows anonymous binds.  |
| <b>Password</b>       | Configure the bind "Password" for querying LDAP servers. The field can be left blank if the LDAP server allows anonymous binds.  |
| <b>Number Filter</b>  | Configure the filter used for number lookups. Please refer to user manual for more details.  |
| <b>Name Filter</b>    | Configure the filter used for name lookups. Please refer to user manual for more details.  |
| <b>Version</b>        | Select the protocol version for the phone to send the bind requests. The default value is 3.   |
| <b>Name Attribute</b> | Specify the "name" attributes of each record which are returned in the LDAP  |



|                                    |   |
|------------------------------------|---|
|                                    | <p>search result. Example:</p> <ul style="list-style-type: none"> <li>• gn</li> <li>• cn sn description</li> </ul>  |
| <b>Number Attribute</b>            | <p>Specify the "number" attributes of each record which are returned in the LDAP search result. Example:</p> <ul style="list-style-type: none"> <li>• telephoneNumber</li> <li>• telephoneNumber Mobile</li> </ul>  |
| <b>Display Name</b>                | <p>Configure the entry information to be shown on phone's LCD. Up to 3 fields can be displayed. Example:</p> <ul style="list-style-type: none"> <li>• %cn %sn %telephoneNumber</li> </ul>   |
| <b>Max Hits</b>                    | <p>Specify the maximum number of results to be returned by the LDAP server. Valid range is 1 to 3000. The default value is 50.</p>  |
| <b>Search Timeout</b>              | <p>Specify the interval (in seconds) for the server to process the request and client waits for server to return. Valid range is 0 to 180. The default value is 30.</p>   |
| <b>Sort Results</b>                | <p>Specify whether the searching result is sorted or not.<br/>The default setting is No.</p>  |
| <b>Incoming Calls</b>              | <p>Configure to enable LDAP number searching when receiving calls. The default setting is No.</p>   |
| <b>Outgoing Calls</b>              | <p>Configure to enable LDAP number searching when making calls. The default setting is No.</p>  |
| <b>Lookup Display Name</b>         | <p>Configures the display name when LDAP looks up the name for incoming call or outgoing call. It must be a subset of the LDAP Name Attributes.</p>   |
| <b>XML Phonebook</b>               |   |
| <b>Phonebook XML Server</b>        | <p>Select the source of the phonebook XML server.</p> <ul style="list-style-type: none"> <li>• Disable<br/>Disable phonebook XML downloading.</li> <li>• Manual<br/>Once selected, users need specify downloading protocol HTTP, HTTPS or TFTP and the server path to download the phonebook XML file. The server path could be IP address or URL, with up to 256 characters.</li> <li>• Local UCM Server<br/>Once selected, click on the Server Path field to upload the phonebook XML file. Please note: after uploading the phonebook XML file to the server, the original file name will be used as the directory name and the file will be renamed as phonebook.xml under that directory.</li> </ul> |
| <b>Phonebook Download Interval</b> | <p>Configure the phonebook download interval (in Minute). If set to 0, automatic download will be disabled. Valid range is 5 to 720.</p>  |



|   |  |
|---|--|
| <b>Remove manually-edited entries on download</b> | If set to "Yes", when XML phonebook is downloaded, the entries added manually will be automatically removed. |
|---|--|

**Table 29: Global Policy Parameters->Maintenance**

| Upgrade and Provision          |   |
|--------------------------------|---|
| <b>Firmware Source</b>         | <p>Firmware source via ZeroConfig provisioning could a URL for external server address, local UCM directory or USB media if plugged in to the UCM6200.</p> <p>Select a source to get the firmware file:</p> <ul style="list-style-type: none"> <li>• URL<br/>If select to use URL to upgrade, complete the configuration for the following four parameters: "Upgrade Via", "Server Path", "File Prefix" and "File Postfix".</li> <li>• Local UCM Server<br/>Firmware can be uploaded to the UCM6200 internal storage for firmware upgrade. If selected, click on "Manage Storage" icon next to "Directory" option, upload firmware file and select directory for the end device to retrieve the firmware file.</li> <li>• Local USB Media<br/>If selected, the USB storage device needs to be plugged into the UCM6200 and the firmware file must be put under a folder named "ZC_firmware" in the USB storage root directory.</li> <li>• Local SD Card Media<br/>If selected, an SD card needs to be plugged into the UCM6200 and the firmware file must be put under a folder named "ZC_firmware" in the USB storage root directory.</li> </ul> |
| <b>Upgrade via</b>             | When URL is selected as firmware source, configure upgrade via TFTP, HTTP or HTTPS.   |
| <b>Server Path</b>             | When URL is selected as firmware source, configure the firmware upgrading server path.  |
| <b>File Prefix</b>             | When URL is selected as firmware source, configure the firmware file prefix. If configured, only the firmware with the matching encrypted prefix will be downloaded and flashed into the phone, if URL is selected as firmware source.  |
| <b>File Postfix</b>            | When URL is selected as firmware source, configure the firmware file postfix. If configured, only the configuration file with the matching encrypted postfix will be downloaded and flashed into the phone.   |
| <b>Allow DHCP Option 43/66</b> | If DHCP option 43 or 66 is enabled on the LAN side, the TFTP server can be redirected.  |
| <b>Automatic Upgrade</b>       | If enabled, the endpoint device will automatically upgrade if a new firmware is   |



|  |   |
|--|---|
|  | <p>detected. Users can select automatic upgrading by day, by week or by minute.</p> <ul style="list-style-type: none"> <li>• By week<br/>Once selected, specify the day of the week to check HTTP/TFTP server for firmware upgrades or configuration files changes.</li> <li>• By day<br/>Once selected, specify the hour of the day to check the HTTP/TFTP server for firmware upgrades or configuration files changes.</li> <li>• By minute<br/>Once selected, specify the interval <b>X</b> that the SIP end device will request for new firmware every <b>X</b> minutes.</li> </ul> |
| <b>Firmware Upgrade Rule</b>                                   | Specify how firmware upgrading and provisioning request to be sent.   |
| <b>Web Access</b>  |   |
| <b>Admin Password</b>  | Configure the administrator password for admin level login.   |
| <b>End-User Password</b>                                       | Configure the end-user password for the end user level login.   |
| <b>Web Access Mode</b>   | Select HTTP or HTTPS as the web access protocol.  |
| <b>Web Server Port</b>   | Configure the port for web access. The valid range is 1 to 65535.   |
| <b>Security</b>  |   |
| <b>Disable Telnet/SSH</b>                                      | Enable Telnet/SSH access for the SIP end device. If the SIP end device supports Telnet access, this option controls the Telnet access of the device; if the SIP end device supports SSH access, this option controls the SSH access of the device.  |
| <b>Syslog</b>  |   |
| <b>Syslog Server</b>   | Configure the URL/IP address for the syslog server.   |
| <b>Syslog Level</b>  | Select the level of logging for syslog.   |
| <b>Send SIP Log</b>  | Configure whether the SIP log will be included in the syslog message.   |
| <b>Table 30: Global Policy Parameters-&gt;Network Settings</b> |   |
| <b>Basic Settings</b>  |   |
| <b>IP Address</b>  | <p>Configure how the SIP end device shall obtain the IP address. DHCP or PPPoE can be selected.</p> <ul style="list-style-type: none"> <li>• DHCP<br/>Once selected, users can specify the Host Name (option 12) of the SIP end device as DHCP client, and Vendor Class ID (option 60) used by the client and server to exchange vendor class ID information.</li> <li>• PPPoE<br/>Once selected, users need specify the Account ID, Password and Service Name for PPPoE.</li> </ul>  |
| <b>Advanced Setting</b>  |   |
| <b>Layer 3 QoS</b>   | Define the Layer 3 QoS parameter. This value is used for IP Precedence, Diff-   |



|                                   |   |
|-----------------------------------|---|
|                                   | Serv or MPLS. Valid range is 0-63.  |
| <b>Layer 2 QoS Tag</b>            | Assign the VLAN Tag of the Layer 2 QoS packets. Valid range is 0 -4095.   |
| <b>Layer 2 QoS Priority Value</b> | Assign the priority value of the Layer 2 QoS packets. Valid range is 0-7.   |
| <b>STUN Server</b>                | Configure the IP address or Domain name of the STUN server. Only non-symmetric NAT routers work with STUN.  |
| <b>Keep Alive Interval</b>        | Specify how often the phone will send a blank UDP packet to the SIP server in order to keep the "ping hole" on the NAT router to open. Valid range is 10-160. |

**Table 31: Global Policy Parameters->Customization**

| <b>Wallpaper</b>                    |  |
|-------------------------------------|--|
| <b>Screen Resolution 1024 x 600</b> | <p>Check this option if the SIP end device shall use 1024 x 600 resolution for the LCD screen wallpaper.</p> <ul style="list-style-type: none"> <li>• Source<br/>Configure the location where wallpapers are stored.</li> <li>• File<br/>If "URL" is selected as source, specify the URL of the wallpaper file. If "Local UCM Server" is selected as source, click to upload wallpaper file to the UCM6200.</li> </ul> |
| <b>Screen Resolution 800 x 400</b>  | <p>Check this option if the SIP end device shall use 800 x 400 resolution for the LCD screen wallpaper.</p> <ul style="list-style-type: none"> <li>• Source<br/>Configure the location where wallpapers are stored.</li> <li>• File<br/>If "URL" is selected as source, specify the URL of the wallpaper file. If "Local UCM Server" is selected as source, click to upload wallpaper file to the UCM6200.</li> </ul>  |
| <b>Screen Resolution 480 x 272</b>  | <p>Check this option if the SIP end device shall use 480 x 272 resolution for the LCD screen wallpaper.</p> <ul style="list-style-type: none"> <li>• Source<br/>Configure the location where wallpapers are stored.</li> <li>• File<br/>If "URL" is selected as source, specify the URL of the wallpaper file. If "Local UCM Server" is selected as source, click to upload wallpaper file to the UCM6200.</li> </ul>  |
| <b>Screen Resolution 320 x 240</b>  | <p>Check this option if the SIP end device supports 320 x 240 resolution for the LCD screen wallpaper.</p> <ul style="list-style-type: none"> <li>• Source<br/>Configure the location where wallpapers are stored.</li> </ul>  |



- **File**  
 If "URL" is selected as source, specify the URL of the wallpaper file. If "Local UCM Server" is selected as source, click to upload wallpaper file to the UCM6200.

## Global Templates

Global Templates can be accessed in web GUI->**PBX->Zero Config->Global Templates**. Users can create multiple global templates with different sets of configurations and save the templates. Later on, when the user configures the device in Edit Device dialog->Advanced Settings, the user can select to use one of the global template for the device. Please refer to section **[Manage Devices]** for more details on using the global templates.

When creating global template, users can select the categories and the parameters under each category to be used in the template. The global policy and the selected global template will both take effect when generating the config file. However, the selected global template has higher priority to the global policy when it comes to the same setting option/field. If the same option/field has different value configured in the global policy and the selected global template, the value for this option/field in the selected global template will override the value in global policy.

Click on "Create New Template" to add a global template. Users will see the following configurations.

**Table 32: Create New Template**

|                      |  |
|----------------------|--|
| <b>Template Name</b> | Create a name to identify this global template.                  |
| <b>Description</b>   | Provide a description for the global template. This is optional. |
| <b>Active</b>        | Check this option to enable the global template.                 |

- Click on  to edit the global template.

The window for editing global template is shown in the following figure. In the "Options" field, after entering the option name key word, the options containing the key word will be listed. Users could then select the options to be modified and click on "Add Option" to add it into the global template.



Edit Template : temp1
X

📘 Template Name:

📘 Description:

📘 Active:

Options
Phone Settings
▼
Add Option

Localization ▼

Language Settings

📘 Language:  ▼

Phone Settings ▼

Default Call Settings

📘 Dial Plan:

---

📘 Enable Call Features:  ▼

---

📘 Use # as Dial Key:  ▼

---

📘 Auto Answer by Call-Info:  ▼



---

📘 NAT Traversal:  ▼


---

Cancel
Save

**Figure 78: Edit Global Template**

The added options will show in the list. Users can then enter or select value for each option to be used in the global template. On the left side of each added option, users can click on  to remove this option from the template. On the right side of each option, users can click on  to reset the option value to the default value.

Click on “Save” to save this global template.

- The created global templates will show in the web UI->PBX->Zero Config->Global Templates page. Users can click on  to delete the global template or click on “Delete Selected Templates” to delete multiple selected templates at once.





- Click on “Toggle Selected Template(s)” to toggle the status between enabled/disabled for the selected templates.

## Model configuration

### Model templates

Model layer configuration allows users to apply model-specific configurations to different devices. Users could create/edit/delete a model template by accessing web GUI, page **PBX->Zero Config->Model Templates**. If multiple model templates are created and enabled, when the user configures the device in Edit Device dialog->Advanced Settings, the user can select to use one of the model template for the device. Please refer to section **[Manage Devices]** for more details on using the model template.

For each created model template, users can assign it as default model template. If assigned as default model template, the values in this model template will be applied to all the devices of this model. There is always only one default model template that can be assigned at one time on the UCM6200.

The selected model template and the default model template will both take effect when generating the config file for the device. However, the model template has higher priority to default model template when it comes to the same setting option/field. If the same option/field has different value configured in the default model template and the selected model template, the value for this option/field in the selected model template will override the value in default model template.

- Click on “Create New Template” to add a model template.



**Table 33: Create New Model Template**

|                               |  |
|-------------------------------|--|
| <b>Model</b>                  | Select a model to apply this template. The supported Grandstream models are listed in the dropdown list for selection.   |
| <b>Template Name</b>          | Create a name for the model template.  |
| <b>Description</b>            | Enter a description for the model template. This is optional.  |
| <b>Default Model Template</b> | Select to assign this model template as the default model template. The value of the option in default model template will be overridden if other selected model template has a different value for the same option. |
| <b>Active</b>                 | Check this option to enable the model template.  |


- Click on  to edit the model template.

The editing window for model template is shown in the following figure. In the “Options” field, enter the option name key word, the option that contains the key word will be listed. User could then select the option and click on “Add Option” to add it into the model template.




Once added, the option will be shown in the list below. On the left side of each option, users can click on  to remove this option from the model template. On the right side of each option, users can click on  to reset the option to the default value.

User could also click on “Add New Field” to add a P value number and the value to the configuration. The following figure shows setting P value “P1362” to “en”, which means the display language on the LCD is set to English. For P value information of different models, please refer to configuration template here <http://www.grandstream.com/support/tools>.

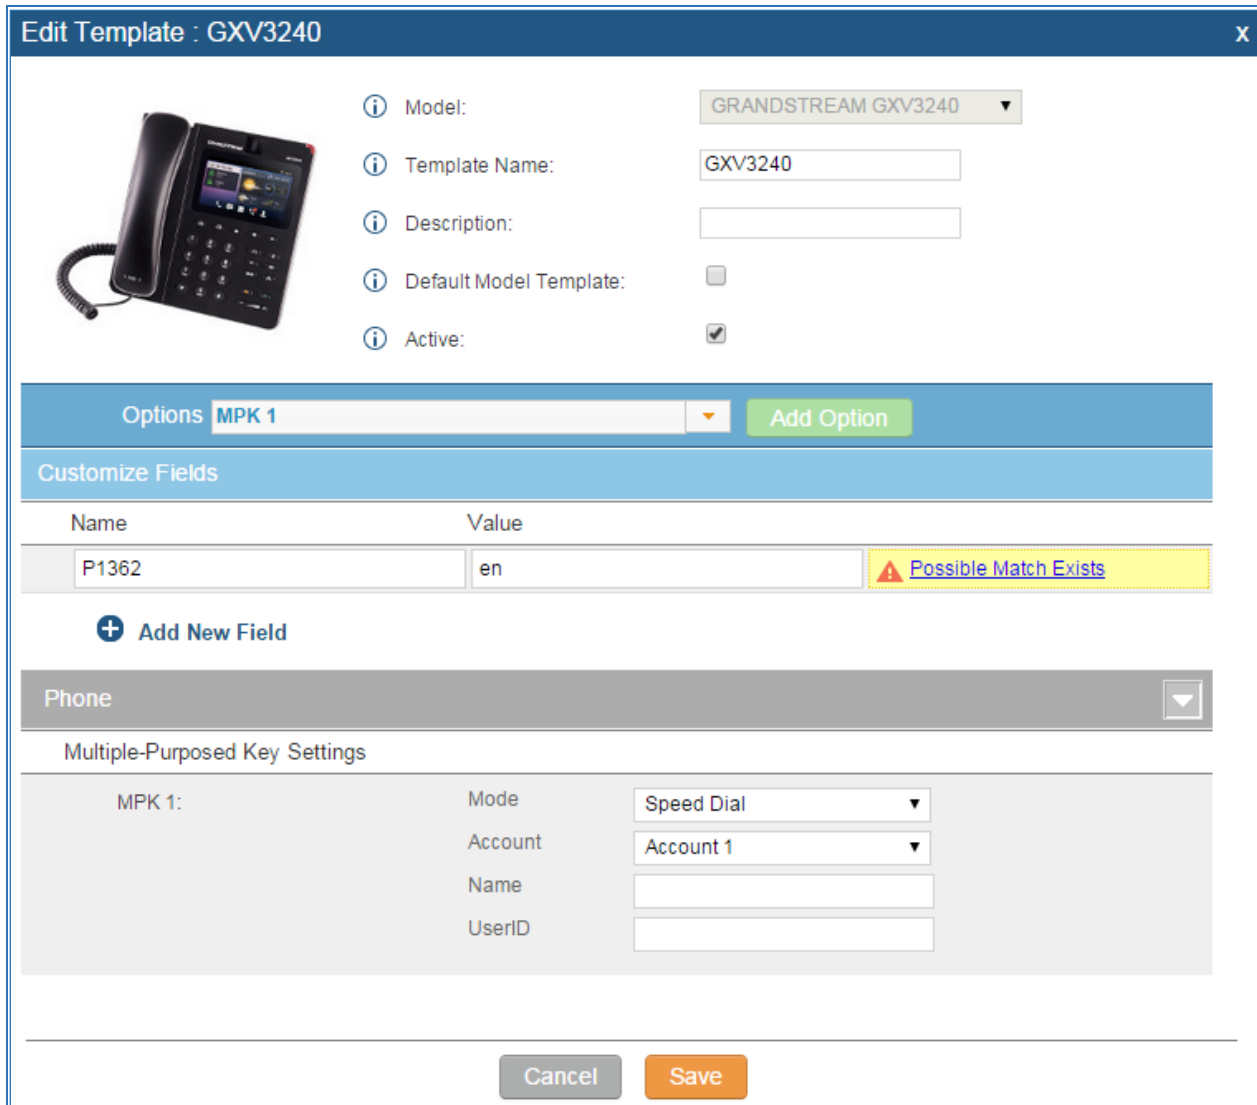

Edit Template : GXV3240
x



i Model:

i Template Name:

i Description:

i Default Model Template:

i Active:

GRANDSTREAM GXV3240 ▼

GXV3240

Options **MPK 1**
Add Option

Customize Fields

| Name  | Value |                       |
|-------|-------|-----------------------|
| P1362 | en    | Possible Match Exists |

+ Add New Field

Phone ▼

Multiple-Purposed Key Settings


|        |         |                      |
|--------|---------|----------------------|
| MPK 1: | Mode    | Speed Dial ▼         |
|        | Account | Account 1 ▼          |
|        | Name    | <input type="text"/> |
|        | UserID  | <input type="text"/> |

Cancel
Save

**Figure 79: Edit Model Template**



- Click on Save when done. The model template will be displayed on web UI->**PBX->Zero Config->Model Templates** page.













- Click on  to delete the model template or click on “Delete Selected Templates” to delete multiple selected templates at once.
- Click on “Toggle Selected Template(s)” to toggle the status between enabled/disabled for the selected model templates.

## Model Update

UCM6200 zero config feature supports provisioning all models of Grandstream SIP end devices. Templates for most of the Grandstream models are built in with the UCM6200 already. Templates for GS Wave and Grandstream surveillance products require users to download and install under web UI->**PBX->Zero Config->Model Update** first before they are available in the UCM6200 for selection. After downloading and installing the model template to the UCM6200, it will show in the dropdown list for “Model” selection when editing the model template.

- Click on  to download the template.
- Click on  to upgrade the model template. Users will see this icon available if the device model has template updated in the UCM6200.

| Model Template Package List |              |                        |      |   |
|-----------------------------|--------------|------------------------|------|---|
| Vendor                      | Model        | Version (Remote/Local) | Size | Option  |
| Grandstream                 | DP750        | 1.0/1.0                | 26K  |  |
| Grandstream                 | GAC2500      | 1.1/-                  | 24K  |  |
| Grandstream                 | GSWave       | 1.0/-                  | 8.0K |  |
| Grandstream                 | GVC3200      | 1.1/-                  | 18K  |  |
| Grandstream                 | GVC3202      | 1.1/-                  | 13K  |  |
| Grandstream                 | GXP1100      | 1.0/-                  | 729K |  |
| Grandstream                 | GXP1105      | 1.0/-                  | 297K |  |
| Grandstream                 | GXP1600C     | 1.0/-                  | 21K  |  |
| Grandstream                 | GXP1628B     | 1.0/-                  | 23K  |  |
| Grandstream                 | Surveillance | 1.0/-                  | 12K  |  |


Total: 10 Show: 1/1 Go to:

**Figure 80: Template Management**

In case the UCM6200 is placed in the private network and Internet access is restricted, users will not be able to get packages by downloading and installing from the remote server. Model template package can be manually uploaded from local device through web UI. Please contact Grandstream customer support if the model package



is needed for manual uploading.

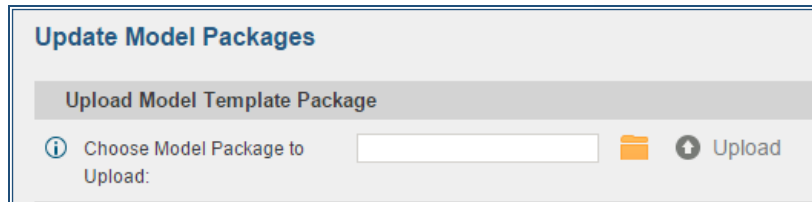

**Figure 81: Upload Model Template Manually**

## Device Configuration

On web GUI, page **PBX->Zero Config->Zero Config**, users could create new device, delete existing device(s), make special configuration for a single device, or send NOTIFY to existing device(s).

### Create New Device


Besides configuring the device after the device is discovered, users could also directly create a new device and configure basic settings before the device is discovered by the UCM6200. Once the device is plugged in, it can then be discovered and provisioned. This gives the system administrator adequate time to set up each device beforehand.

Click on "Create New Device" and the following dialog will show. Follow the steps below to create the configurations for the new device.

1. Firstly, select a model for the device to be created and enter its MAC address, IP address and firmware version (optional) in the corresponding field.
2. Basic settings will show a list of settings based on the model selected in step 1. Users could assign extensions to accounts, assign functions to Line Keys and Multiple-Purposed Keys if supported on the selected model.
3. Click on "Create New Device" to save the configuration for this device.



Create New Device
X



Model

MAC Address

IP Address

Version

**Basic**

Accounts

|                                     |            |                                   |
|-------------------------------------|------------|-----------------------------------|
| <input checked="" type="checkbox"/> | Account 1: | <input type="text" value="1002"/> |
| <input type="checkbox"/>            | Account 2: | <input type="text" value="1002"/> |
| <input type="checkbox"/>            | Account 3: | <input type="text" value="1002"/> |
| <input type="checkbox"/>            | Account 4: | <input type="text" value="1002"/> |
| <input type="checkbox"/>            | Account 5: | <input type="text" value="1002"/> |
| <input type="checkbox"/>            | Account 6: | <input type="text" value="1002"/> |

Line Key Setting

|                          |         |                                   |
|--------------------------|---------|-----------------------------------|
| <input type="checkbox"/> | Line 1: | <input type="text" value="Line"/> |
|--------------------------|---------|-----------------------------------|

**Figure 82: Create New Device**

## Manage Devices

The device manually created or discovered from Auto Discover will be listed in the web UI->**PBX**->**Zero Config**->**Zero Config** page. Users can see the devices with their MAC address, IP address, vendor, model and etc.


|              |                |    |          |             |         |    |  |
|--------------|----------------|----|----------|-------------|---------|----|--|
| 000B822A852C | 192.168.40.3   | -- | 1.0.4.9  | GRANDSTREAM | GXP2100 | -- |  |
| 000B822B0B34 | --             | -- | 1.0.5.31 | GRANDSTREAM | GXP2120 | -- |  |
| 000B822B2D94 | 192.168.40.143 | -- | 1.0.5.26 | GRANDSTREAM | GXP2110 | -- |  |

**Figure 83: Manage Devices**

- Click on to access the web UI of the phone.
- Click on to edit the device configuration.



A new dialog will be displayed for the users to configure “Basic” settings and “Advanced” settings. “Basic” settings have the same configurations as displayed when manually creating a new device, i.e., account, line key and MPK settings; “Advanced” settings allow users to configure more details in a five-level structure.

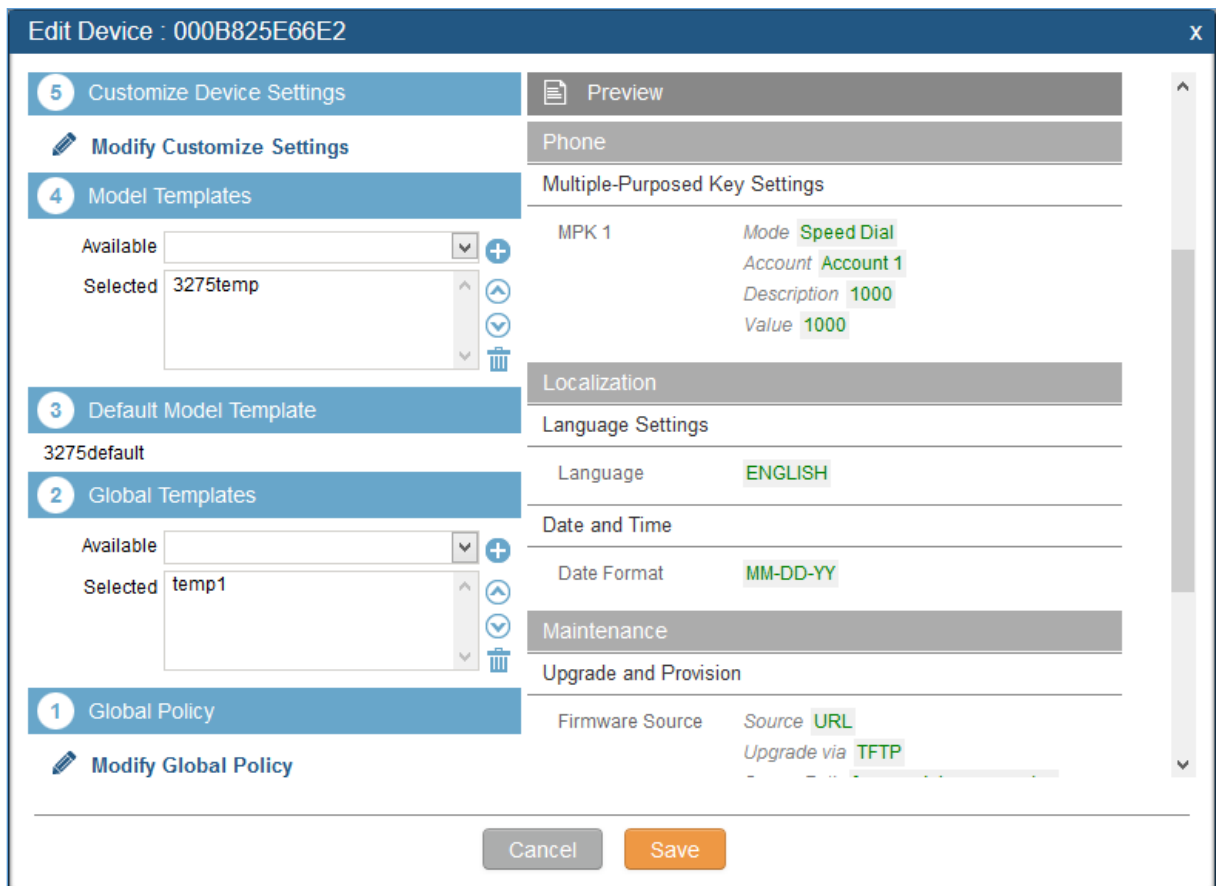

**Figure 84: Edit Device**





A preview of the “Advanced” settings is shown in the above figure. There are five levels configurations as described in (1) (2) (3) (4) (5) below, with priority from the lowest to the highest. The configurations in all levels will take effect for the device. If there are same options existing in different level configurations with different value configured, the higher level configuration will override the lower level configuration.

(1) Global Policy

This is the lowest level configuration. The global policy configured in web UI->**PBX->Zero Config->Global Policy** will be applied here. Clicking on “Modify Global Policy” to redirect to page **PBX->Zero Config->Global Policy**.

(2) Global Templates







Select a global template to be used for the device and click on  to add. Multiple global templates can be selected and users can arrange the priority by adjusting orders via  and . All the selected global templates will take effect. If the same option exists on multiple selected global templates, the value in the template with higher priority will override the one in the template with lower priority. Click on  to remove the global template from the selected list.

(3) Default Model Template

Default Model Template will be applied to the devices of this model. Default model template can be configured in model template under web UI->**PBX**->**Zero Config**->**Model Templates** page. Please see default model template option in [\[Table 33: Create New Model Template\]](#).


(4) Model Templates

Select a model template to be used for the device and click on  to add. Multiple global templates can be selected and users can arrange the priority by adjusting orders via  and . All the selected model templates will take effect. If the same option exists on multiple selected model templates, the value in the template with higher priority will override the one in the template with lower priority. Click on  to remove the model template from the selected list.

(5) Customize Device Settings

This is the highest level configuration for the device. Click on “Modify Customize Device Settings” and following dialog will show.

Edit Customize Device Settings : 000B825E66E2
X



|             |                     |
|-------------|---------------------|
| Model       | GRANDSTREAM GXV3275 |
| MAC Address | 000B825E66E2        |
| IP Address  | 192.168.40.148      |
| Version     | 1.0.1.50            |

Options ▼

Customize Fields

| Name  | Value |
|---|-------|
| <span style="color: #0056b3; font-weight: bold;">+</span> Add New Field |       |

Phone
▼

Accounts

|                          |            |                 |                      |
|--------------------------|------------|-----------------|----------------------|
| <input type="checkbox"/> | Account 1: | Account Active  | Yes ▼                |
|                          |            | Account Name    | <input type="text"/> |
|                          |            | SIP Server      | <input type="text"/> |
|                          |            | Outbound Proxy  | <input type="text"/> |
|                          |            | SIP User ID     | <input type="text"/> |
|                          |            | Authenticate ID | <input type="text"/> |

Cancel
Save


**Figure 85: Edit Customize Device Settings**

Scroll down in the dialog to view and edit the device-specific options. If the users would like to add more options which are not in the pre-defined list, click on “Add New Field” to add a P value number and the value to the configuration. The following figure shows setting P value “P1362” to “en”, which means the display language on the LCD is set to English. The warning information on right tells that the option matching the P value number exists and clicking on it will lead to the matching option. For P value information of different models, please refer to configuration template here <http://www.grandstream.com/sites/default/files/Resources/config-template.zip>.





Edit Customize Device Settings : 000B8262B023
X



|             |                     |
|-------------|---------------------|
| Model       | GRANDSTREAM GXP2140 |
| MAC Address | 000B8262B023        |
| IP Address  | 192.168.40.161      |
| Version     |                     |

Options ▼

Customize Fields

| Name  | Value                           |                         |
|---|---------------------------------|-------------------------|
| <input type="text" value="P1362"/>                                      | <input type="text" value="en"/> | ⚠ Possible Match Exists |
| <span style="color: #0056b3; font-weight: bold;">+</span> Add New Field |                                 |                         |

Phone
▼

Default Call Settings


|                          |  |   |
|--------------------------|--|---|
| <input type="checkbox"/> | <span style="color: #0056b3;">i</span> Dial Plan:            | <input type="text" value="{x+   *x+   *xx*x+ }"/> |
| <input type="checkbox"/> | <span style="color: #0056b3;">i</span> Enable Call Features: | <input type="text" value="Yes"/> ▼                |
| <input type="checkbox"/> | <span style="color: #0056b3;">i</span> Use # as Dial Key     | <input type="text" value="Yes"/> ▼                |

**Figure 86: Add P Value in Customize Device Settings**


- Select multiple devices that need to be modified and then click on Modify Selected Devices to batch modify devices.

If selected devices are of the same model, the configuration dialog is like the following figure. Configurations in five levels are all available for users to modify.




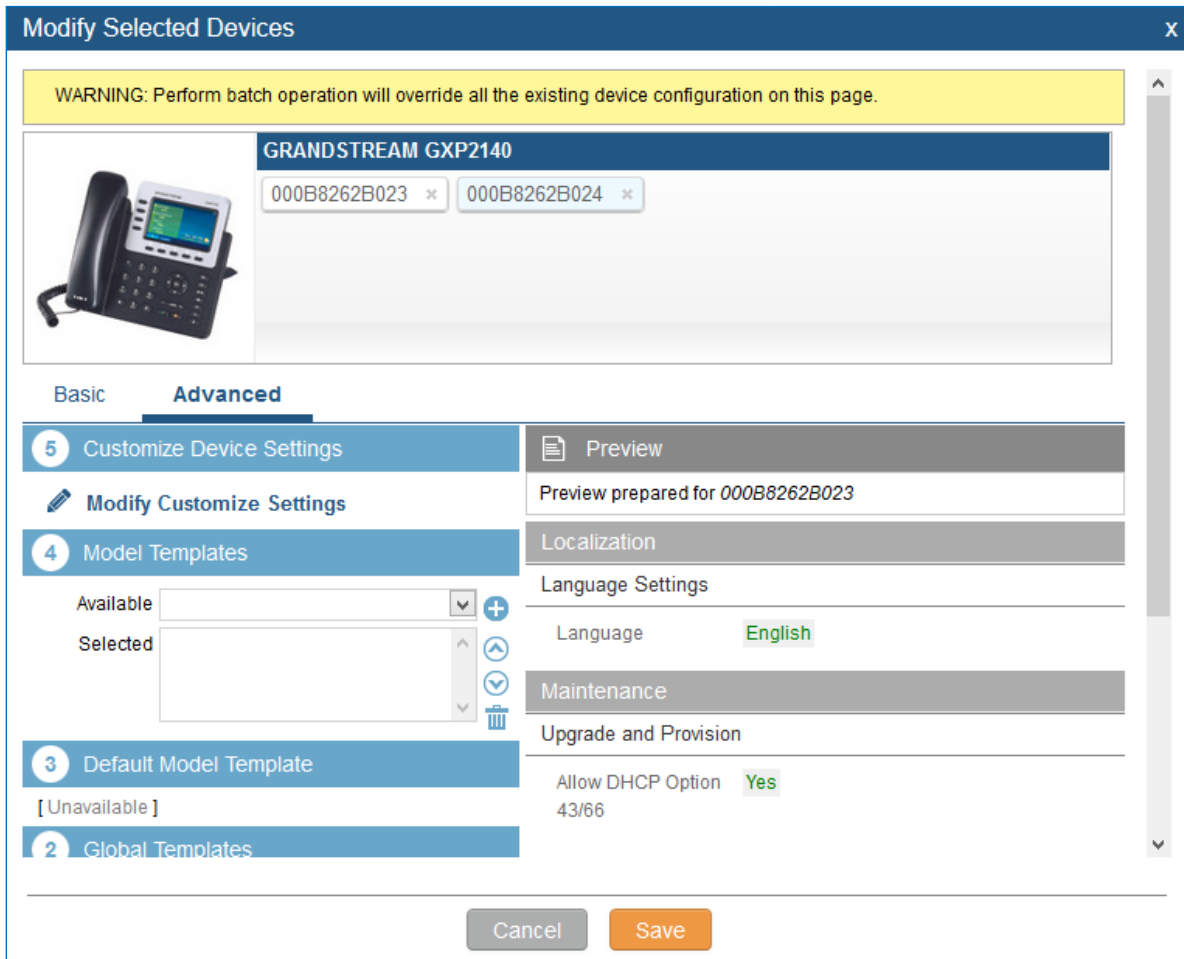

**Figure 87: Modify Selected Devices - Same Model**

If selected devices are of different models, the configuration dialog is like the following figure. Click on  to view more devices of other models. Users are only allowed to make modifications in Global Templates and Global Policy level.



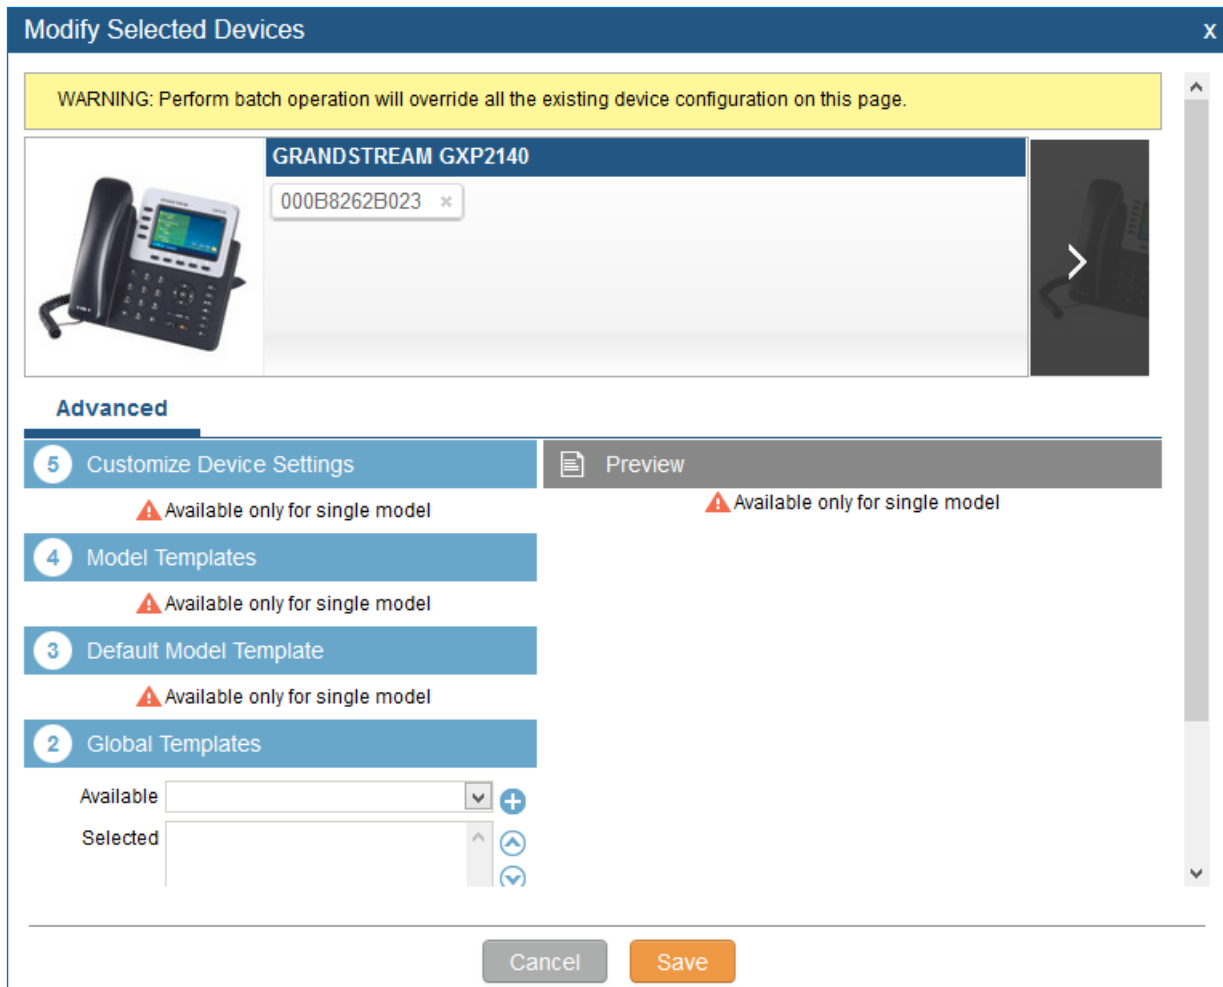


**Figure 88: Modify Selected Devices - Different Models**

 **Note:**

Performing batch operation will override all the existing device configuration on the page.

After the above configurations, save the changes and go back to web UI->**PBX->Zero Config->Zero Config** page. Users could then click on  to send NOTIFY to the SIP end point device and trigger the provisioning process. The device will start downloading the generated configuration file from the URL contained in the NOTIFY message.



**Manage Zero Config**

Filter: All View: 30

| <input type="checkbox"/> | MAC Address  | IP Address     | Extension | Version | Vendor      | Model   | Create Config | Options |
|--------------------------|--------------|----------------|-----------|---------|-------------|---------|---------------|---------|
| <input type="checkbox"/> | 000B8262B023 | 192.168.40.161 | --        | --      | GRANDSTREAM | GXP2140 | --            |         |
| <input type="checkbox"/> | 000B8262B024 | 192.168.40.157 | --        | --      | GRANDSTREAM | GXP2140 | --            |         |
| <input type="checkbox"/> | 000B82661BA9 | 192.168.40.166 | --        | --      | GRANDSTREAM | GXP2160 | --            |         |
| <input type="checkbox"/> | 000B8266ED61 | 192.168.40.125 | 1009      | --      | GRANDSTREAM | GXV3240 | --            |         |

Total: 4 Show: 1/1 Go to:

**Figure 89: Device List in Zero Config**


In this web page, users can also click on “Reset All Extensions” to reset the extensions of all the devices.

## Sample Application

Assuming in a small business office where there are 8 GXP2140 phones used by customer support and 1 GXV3275 phone used by customer support supervisor. 3 of the 8 customer support members speak Spanish and the rest speak English. We could deploy the following configurations to provisioning the office phones for the customer support team.

1. Go to web GUI->**PBX->Zero Config->Zero Config Settings**, select “Enable Zero Config”.
2. Go to web GUI->**PBX->Zero Config->Global Policy**, configure Date Format, Time Format and Firmware Source as follows.



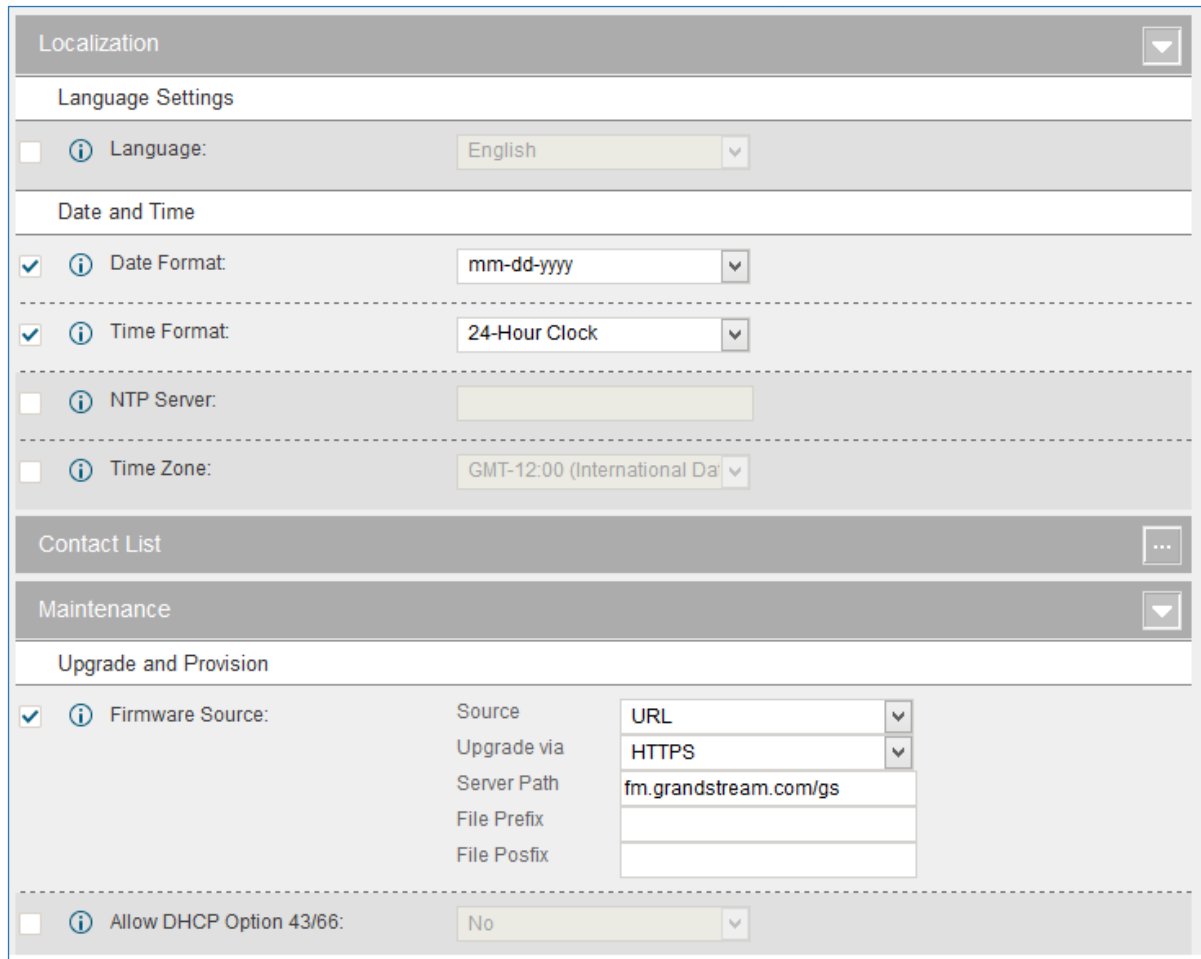


The screenshot displays the Zero Config web GUI interface. It is divided into several sections:

- Localization** (indicated by a dropdown arrow):
  - Language Settings**:
    - Language:  *i* English (dropdown menu)
  - Date and Time**:
    - Date Format:  *i* mm-dd-yyyy (dropdown menu)
    - Time Format:  *i* 24-Hour Clock (dropdown menu)
    - NTP Server:  *i* (text input field)
    - Time Zone:  *i* GMT-12:00 (International Da (dropdown menu)
- Contact List** (indicated by a three-dot menu icon)
- Maintenance** (indicated by a dropdown arrow):
  - Upgrade and Provision**:
    - Firmware Source:  *i*

|             |                       |
|-------------|-----------------------|
| Source      | URL (dropdown menu)   |
| Upgrade via | HTTPS (dropdown menu) |
| Server Path | fm.grandstream.com/gs |
| File Prefix | (text input field)    |
| File Posfix | (text input field)    |
    - Allow DHCP Option 43/66:  *i* No (dropdown menu)

**Figure 90: Zero Config Sample - Global Policy**

3. Go to web GUI->**PBX->Zero Config->Model Templates**, create a new model template “English Support Template” for GXP2140. Add option “Language” and set it to “English”. Then select the option “Default Model Template” to make it the default model template.
4. Go to web GUI->**PBX->Zero Config->Model Templates**, create another model template “Spanish Support Template” for GXP2140. Add option “Language” and set it to “Español”.
5. After 9 devices are powered up and connected to the LAN network, use “Auto Discover” function or “Create New Device” function to add the devices to the device list on web UI->**PBX->Zero Config->Zero Config**.
6. On web GUI->**PBX->Zero Config->Zero Config** page, users could identify the devices by their MAC addresses or IP addresses displayed on the list. Click on  to edit the device settings.



- For each of the 5 phones used by English speaking customer support, in “Basic” settings select an available extension for account 1 and click on “Save”. Then click on “Advanced” settings tab to bring up the following dialog. Users will see the English support template is applied since this is the default model template. A preview of the device settings will be listed on the right side.


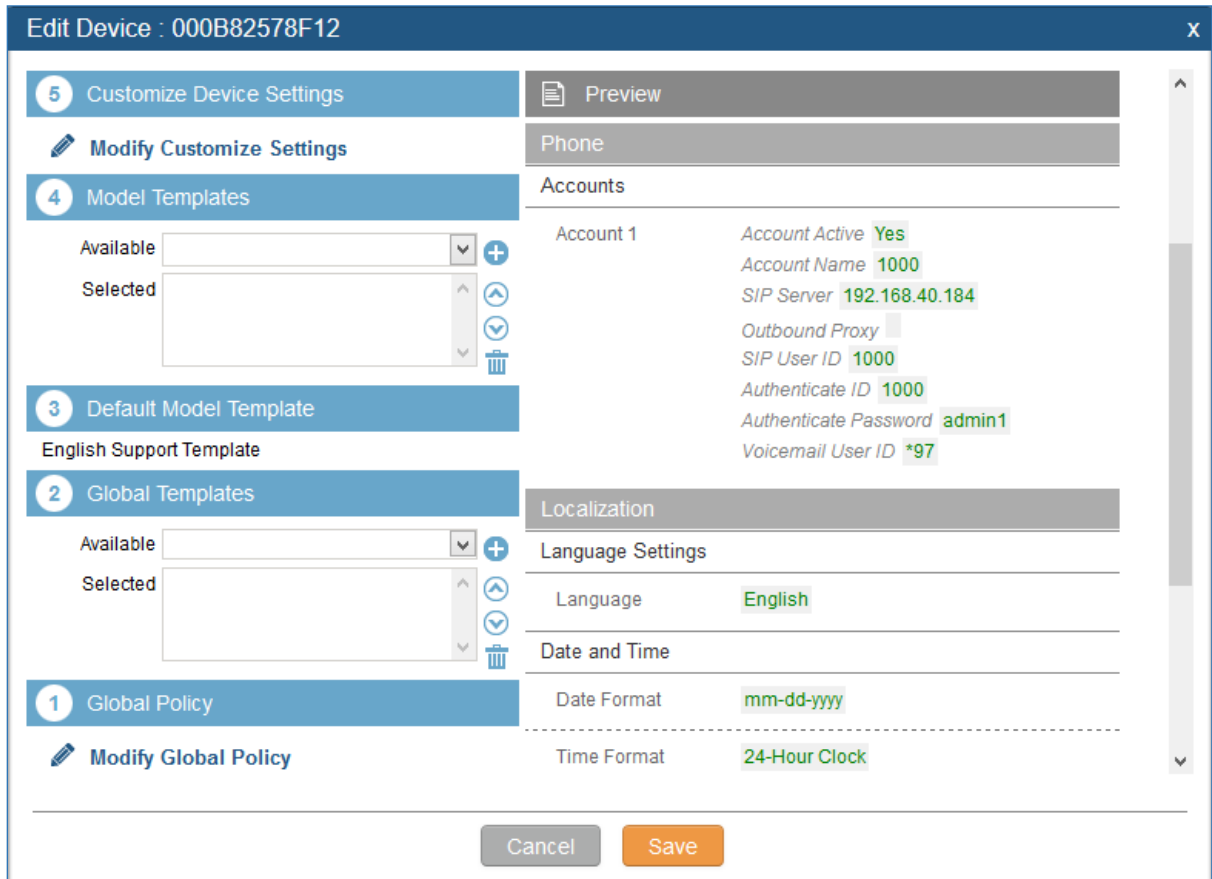


Figure 91: Zero Config Sample - Device Preview 1

- For the 3 phones used by Spanish support, in “Basic” settings select an available extension for account 1 and click on “Save”. Then click on “Advanced” settings tab to bring up the following dialog.



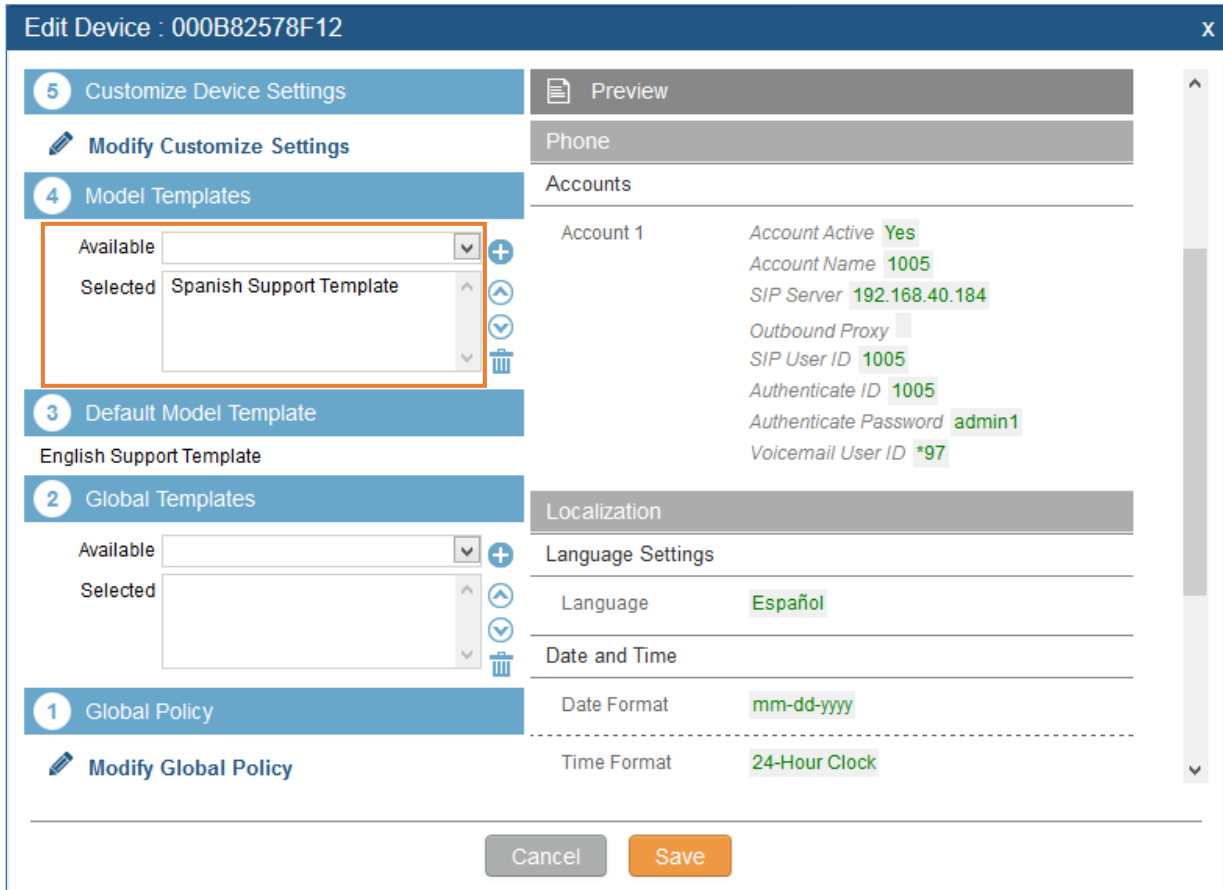

**Figure 92: Zero Config Sample - Device Preview 2**

Select “Spanish Support Template” in ④ “Model Template”. The preview of the device settings is displayed on the right side and we can see the language is set to “Español” since Model Template has the higher priority for the option “Language”, which overrides the value configured in default model template.

9. For the GXV3275 used by the customer support supervisor, select an available extension for account 1 on “Basic” settings and click on “Save”. Users can see the preview of the device configuration in “Advanced” settings. There is no model template configured for GXV3275.



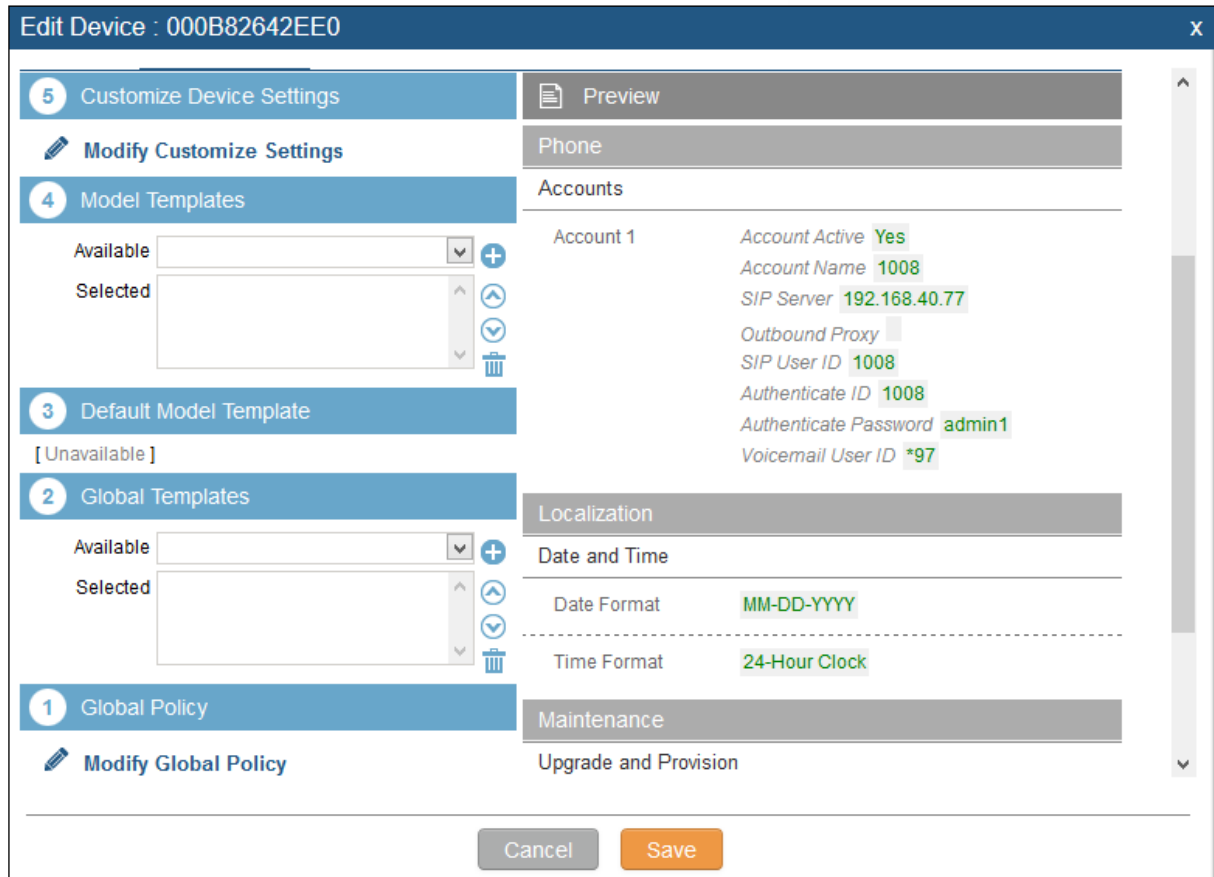



Figure 93: Zero Config Sample - Device Preview 3

10. Click on “Apply Changes” to apply saved changes.
11. On the web UI->**PBX->Zero Config->Zero Config** page, click on  to send NOTIFY to trigger the device to download config file from UCM6200.

Now all the 9 phones in the network will be provisioned with an unique extension registered on the UCM6200. 3 of the phones will be provisioned to display Spanish on LCD and the other 5 will be provisioned to display English on LCD. The GXV3275 used by the supervisor will be provisioned to use the default language on LCD display since it's not specified in the global policy.






## EXTENSIONS

### Create new user

### Create new SIP extension

To manually create new SIP user, go to Web GUI->**PBX->Basic/Call Routes->Extensions**. Click on "Create New User"->"Create New SIP Extension" and a new dialog window will show for users to fill in the extension information.

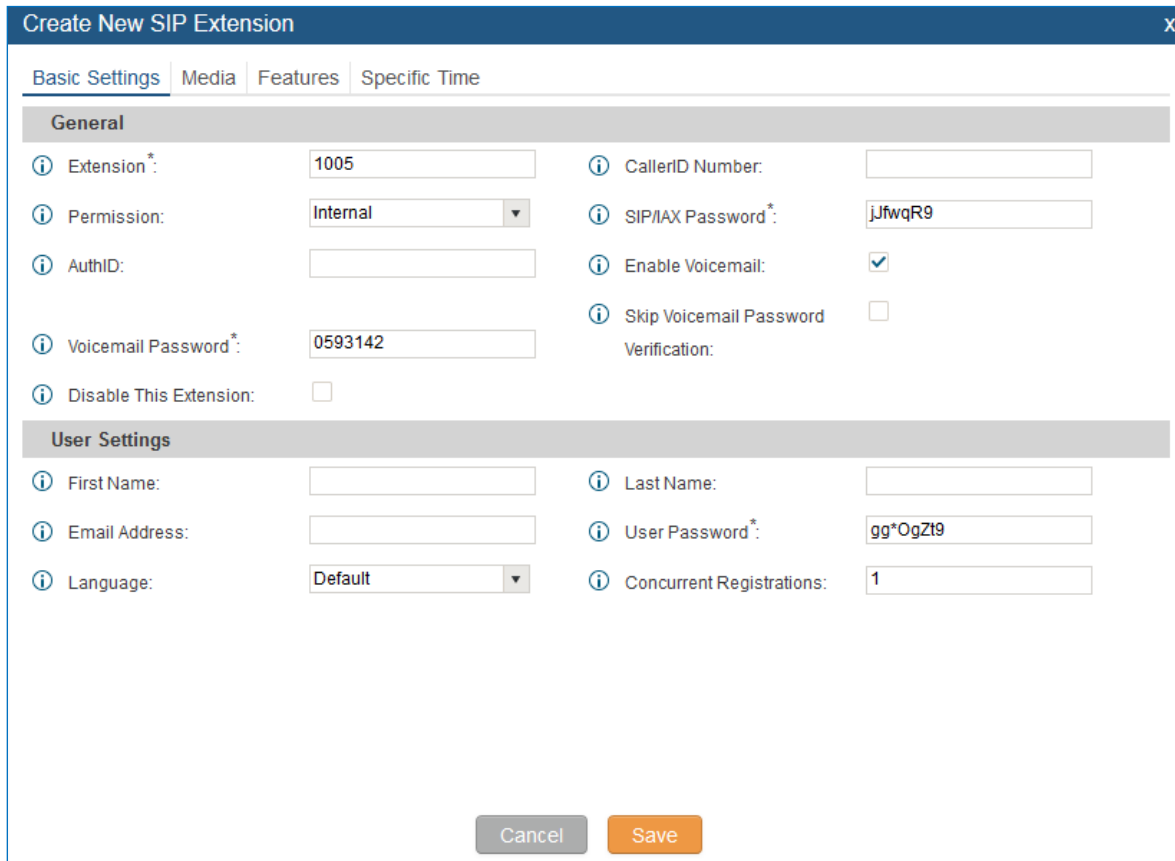

**Figure 94: Create New Device**

SIP extension options are divided into four categories:

- Basic Settings
- Media
- Features
- Specific Time

Click on the tag to view or edit options belonging to that category.

The configuration parameters are as follows.



**Table 34: SIP Extension Configuration Parameters->Basic Settings**

| General                                     |  |
|---|--|
| <b>Extension</b>                            | The extension number associated with the user.   |
| <b>CallerID Number</b>                      | Configure the CallerID Number that would be applied for outbound calls from this user.<br><b>Note:</b><br>The ability to manipulate your outbound Caller ID may be limited by your VoIP provider.  |
| <b>Permission</b>                           | Assign permission level to the user. The available permissions are "Internal", "Local", "National" and "International" from the lowest level to the highest level. The default setting is "Internal".<br><b>Note:</b><br>Users need to have the same level as or higher level than an outbound rule's privilege in order to make outbound calls using this rule. |
| <b>SIP/IAX Password</b>                     | Configure the password for the user. A random secure password will be automatically generated. It is recommended to use this password for security purpose.  |
| <b>Auth ID</b>                              | Configure the authentication ID for the user. If not configured, the extension number will be used for authentication.   |
| <b>Enable Voicemail</b>                     | Enable voicemail for the user. The default setting is "Yes".   |
| <b>Voicemail Password</b>                   | Configure voicemail password (digits only) for the user to access the voicemail box. A random numeric password is automatically generated. It is recommended to use the random generated password for security purpose.  |
| <b>Skip Voicemail Password Verification</b> | When user dials voicemail code, the password verification IVR is skipped. If enabled, this would allow one-button voicemail access. By default this option is disabled.  |
| <b>Disable This Extension</b>               | If selected, this extension will be disabled on the UCM6200.<br><b>Note:</b><br>The disabled extension still exists on the PBX but can't be used on the end device.  |
| User Settings                               |  |
| <b>First Name</b>                           | Configure the first name of the user. The first name can contain characters, letters, digits and _.  |
| <b>Last Name</b>                            | Configure the last name of the user. The last name can contain characters, letters, digits and _.  |
| <b>Email Address</b>                        | Fill in the Email address for the user. Voicemail will be sent to this Email address.  |
| <b>User Password</b>                        | Configure the password for user portal access. A random numeric password is automatically generated. It is recommended to use the randomly generated password for security purpose.  |
| <b>Language</b>                             | Select the voice prompt language to be used for this extension. The default setting is "Default" which is the selected voice prompt language under web GUI->PBX-   |



|                                 |  |
|---------------------------------|--|
|                                 | > <b>Internal Options-&gt;Language</b> . The dropdown list shows all the current available voice prompt languages on the UCM6200. To add more languages in the list, please download voice prompt package by selecting "Check Prompt List" under web UI-> <b>PBX-&gt;Internal Options-&gt;Language</b> . |
| <b>Concurrent Registrations</b> | The maximum endpoints which can be registered into this extension. For security concerns, the default value is 1.  |
| <b>Mobile Phone Number</b>      | Configure the phone number for the extension, user can type the related star code for phone number followed by the extension number to call directly this number.<br>Example: user can type *881000 to call the mobile number associated with extension 1000.  |

**Table 35: SIP Extension Configuration Parameters->Media**

| SIP Settings                |   |
|-----------------------------|---|
| <b>NAT</b>                  | Use NAT when the UCM6200 is on a public IP communicating with devices hidden behind NAT (e.g., broadband router). If there is one-way audio issue, usually it's related to NAT configuration or Firewall's support of SIP and RTP ports. The default setting is enabled.  |
| <b>Can Direct Media</b>     | By default, the UCM6200 will route the media steams from SIP endpoints through itself. If enabled, the PBX will attempt to negotiate with the endpoints to route the media stream directly. It is not always possible for the UCM6200 to negotiate endpoint-to-endpoint media routing. The default setting is "No". |
| <b>DTMF Mode</b>            | Select DTMF mode for the user to send DTMF. The default setting is "RFC2833". If "Info" is selected, SIP INFO message will be used. If "Inband" is selected, 64-kbit PCMU and PCMA are required. When "Auto" is selected, RFC2833 will be used if offered, otherwise "Inband" will be used.                         |
| <b>TEL URI</b>              | If the phone has an assigned PSTN telephone number, this field should be set to "User=Phone". "User=Phone" parameter will be attached to the Request-Line and "TO" header in the SIP request to indicate the E.164 number. If set to "Enable", "Tel" will be used instead of "SIP" in the SIP request.              |
| <b>Enable Keep-alive</b>    | If enabled, empty SDP packet will be sent to the SIP server periodically to keep the NAT port open. The default setting is "Yes".   |
| <b>Keep-alive Frequency</b> | Configure the Keep-alive interval (in seconds) to check if the host is up. The default setting is 60 seconds.   |
| <b>Alert-Info</b>           | When present in an INVITE request, the alert-Info header field specifies and alternative ring tone to the UAS.  |
| <b>Enable T.38 UDPTL</b>    | Enable or disable T.38 UDPTL support.   |
| <b>SRTP</b>                 | Enable SRTP for the call. The default setting is disabled.  |
| <b>Fax Mode</b>             | Select Fax mode. The default setting is "None".   |



|                         |   |
|-------------------------|---|
|                         | <ul style="list-style-type: none"> <li>• None: Disable Fax.</li> <li>• Fax Detect: Fax signal from the user/trunk during the call can be detected and the received Fax will be sent to the Email address configured for this extension. If no Email address can be found for the user, the Fax will be sent to the default Email address configured in Fax setting page under web UI-&gt;PBX-&gt;Internal Options-&gt;Fax/T.38.</li> </ul>  |
| <b>Strategy</b>         | <p>This option controls how the extension can be used on devices within different types of network. The default setting is "Allow All".</p> <ul style="list-style-type: none"> <li>• Allow All<br/>Device in any network can register this extension.</li> <li>• Local Subnet Only<br/>Only the user in specific subnet can register this extension. Up to three subnet addresses can be specified.</li> <li>• A Specific IP Address<br/>Only the device on the specific IP address can register this extension.</li> </ul> |
| <b>Codec Preference</b> | Select audio and video codec for the extension. The available codecs are: PCMU, PCMA, GSM, AAL2-G.726-32, G.726, G.722, G.729, G.723, iLBC, ADPCM, H.264, H.263, H.263p and VP8.  |

**Table 36: SIP Extension Configuration Parameters->Features**

| Call Transfer                     |  |
|-----------------------------------|--|
| <b>Call Forward Unconditional</b> | Configure the Call Forward Unconditional target number. If not configured, the Call Forward Unconditional feature is deactivated. The default setting is deactivated.  |
| <b>CFU Time Condition</b>         | <p>Select time condition for Call Forward Unconditional. CFU takes effect only during the selected time condition. The available time conditions are "Office Time", "Out of Office Time", "Holiday", "Out of Holiday", "Out of Office Time or Holiday" and "Specific".</p> <p>Note:</p> <ul style="list-style-type: none"> <li>• "Specific" has higher priority to "Office Times" if there is a conflict in terms of time period.</li> <li>• Specific time can be configured on the bottom of the extension configuration dialog. Scroll down the add Time Condition for specific time.</li> <li>• Office Time and Holiday could be configured on page Settings-&gt;Time Settings-&gt;Office Time/Holiday page.</li> </ul> |
| <b>Call Forward No Answer</b>     | Configure the Call Forward No Answer target number. If not configured, the Call Forward No Answer feature is deactivated. The default setting is deactivated.  |
| <b>CFN Time Condition</b>         | <p>Select time condition for Call Forward No Answer. The available time conditions are "Office Time", "Out of Office Time", "Holiday", "Out of Holiday", "Out of Office Time or Holiday" and "Specific".</p> <p>Note:</p> <ul style="list-style-type: none"> <li>• "Specific" has higher priority to "Office Times" if there is a conflict in terms of time</li> </ul>   |



|                           |   |
|---------------------------|---|
|                           | <p>period.</p> <ul style="list-style-type: none"> <li>• Specific time can be configured on the bottom of the extension configuration dialog. Scroll down the add Time Condition for specific time.</li> <li>• Office Time and Holiday could be configured on page Settings-&gt;Time Settings-&gt;Office Time/Holiday page.</li> </ul>   |
| <b>Call Forward Busy</b>  | Configure the Call Forward Busy target number. If not configured, the Call Forward Busy feature is deactivated. The default setting is deactivated.   |
| <b>CFB Time Condition</b> | <p>Select time condition for Call Forward Busy. The available time conditions are “Office Time”, “Out of Office Time”, “Holiday”, “Out of Holiday”, “Out of Office Time or Holiday” and “Specific”.</p> <p>Note:</p> <ul style="list-style-type: none"> <li>• “Specific” has higher priority to “Office Times” if there is a conflict in terms of time period.</li> <li>• Specific time can be configured on the bottom of the extension configuration dialog. Scroll down the add Time Condition for specific time.</li> <li>• Office Time and Holiday could be configured on page Settings-&gt;Time Settings-&gt;Office Time/Holiday page.</li> </ul> |
| <b>Do Not Disturb</b>     | If enabled the extension will ignore all incoming calls   |
| <b>DND Time Condition</b> | <p>Select time condition for Do Not Disturb. The available time conditions are “Office Time”, “Out of Office Time”, “Holiday”, “Out of Holiday”, “Out of Office Time or Holiday” and “Specific”.</p> <p>Note:</p> <ul style="list-style-type: none"> <li>• “Specific” has higher priority to “Office Times” if there is a conflict in terms of time period.</li> <li>• Specific time can be configured on the bottom of the extension configuration dialog. Scroll down the add Time Condition for specific time.</li> </ul> <p>Office Time and Holiday could be configured on page Settings-&gt;Time Settings-&gt;Office Time/Holiday page.</p>        |
| <b>DND Whitelist</b>      | <p>If DND is enabled, all calls to this extension will be rejected except the numbers listed on this list.</p> <p><b>Note:</b> The maximum number on the Whitelist is 10.</p>   |
| <b>CC Settings</b>        |   |
| <b>Enable CC</b>          | If enabled, UCM6200 will automatically alert this extension when a called party is available, given that a previous call to that party failed for some reason. By default it's disabled.  |
| <b>CC Mode</b>            | <p>Two modes for Call Completion are supported:</p> <ul style="list-style-type: none"> <li>• <b>Normal:</b> This extension is used as ordinary extension.</li> <li>• <b>For Trunk:</b> This extension is registered from a PBX.</li> </ul> <p>The default setting is “Normal”.</p>  |
| <b>CC Max Agents</b>      | Configure the maximum number of CCSS agents which may be allocated for this   |



|   |   |
|---|---|
|   | channel. In other words, this number serves as the maximum number of CC requests this channel is allowed to make. The minimum value is 1.   |
| <b>CC Max Monitors</b>                        | Configure the maximum number of monitor structures which may be created for this device. In other words, this number tells how many callers may request CC services for a specific device at one time. The minimum value is 1.  |
| <b>Ring Simultaneously</b>                    |   |
| <b>Ring Simultaneously</b>                    | Enable this option to have an external number ring simultaneously along with the extension. If a register trunk is used for outbound, the register number will be used to be displayed for the external number as caller ID number.   |
| <b>External Number</b>                        | Set the external number to be rang simultaneously. '-' is the connection character which will be ignored.   |
| <b>Time Condition for Ring Simultaneously</b> | Ring the external number simultaneously along with the extension on the basis of this time condition.   |
| <b>Monitor privilege control</b>              |   |
| <b>Allowed to call-barging</b>                | Add members from "Available Extensions" to "Selected Extensions" so that the selected extensions can spy on the used extension using feature code.  |
| <b>Seamless transfer privilege control</b>    |   |
| <b>Allowed to seamless transfer</b>           | Any extensions on the UCM can perform seamless transfer. When using Pickup Incall feature, only extensions available on the "Selected Extensions" list can perform seamless transfer to the edited extension.   |
| <b>Other Settings</b>                         |   |
| <b>Ring Timeout</b>                           | Configure the number of seconds to ring the user before the call is forwarded to voicemail (voicemail is enabled) or hang up (voicemail is disabled). If not specified, the default ring timeout is 60 seconds on the UCM6200, which can be configured in the global ring timeout setting under web GUI->Internal Options->IVR Prompt: General Preference. The valid range is between 5 seconds and 600 seconds.<br><b>Note:</b> If the end point also has a ring timeout configured, the actual ring timeout used is the shortest time set by either device. |
| <b>Auto Record</b>                            | Enable automatic recording for the calls using this extension. The default setting is disabled. The recording files can be accessed under web GUI->CDR->Recording Files.  |
| <b>Skip Trunk Auth</b>                        | <ul style="list-style-type: none"> <li>• If set to "yes", users can skip entering the password when making outbound calls.</li> <li>• If set to "By Time", users can skip entering the password when making outbound calls during the selected time condition.</li> <li>• If set to "No", users will be asked to enter the password when making outbound calls.</li> </ul>  |
| <b>Time Condition for Skip Trunk Auth</b>     | If 'Skip Trunk Auth' is set to 'By Time', select a time condition during which users can skip entering password when making outbound calls.   |



|   |  |
|---|--|
| <b>Dial Trunk Password</b>              | Configure personal password when making outbound calls via trunk.  |
| <b>Support Hot-Desking Mode</b>         | If enabled, SIP Password will accept only alphabet characters and digits. Auth ID will be changed to the same as Extension.                |
| <b>Enable LDAP</b>                      | If enabled, the extension will be added to LDAP Phonebook PBX list.  |
| <b>Enable WebRTC Support</b>            | Enable registration and call from WebRTC.  |
| <b>Music On Hold</b>                    | Specify which Music On Hold class to suggest to the bridged channel when putting them on hold.   |
| <b>Call Duration Limit</b>              | The maximum duration of call-blocking.   |
| <b>Maximum Call Duration</b>            | The maximum call duration (in seconds). The default value 0 means no limit.  |
| <b>Custom Call-info for Auto Answer</b> | If enabled, when a call is sent to this extension from UCM, the SIP INVITE message will contain a Call-info header indicating auto answer. |

**Table 37: SIP Extension Configuration Parameters->Specific Time**

| Specific Time         |  |
|-----------------------|--|
| <b>Time Condition</b> | Click to add Time Condition to configure specific time for this extension. |

## Create New IAX Extension

The UCM6200 supports Inter-Asterisk eXchange (IAX) protocol. IAX is used for transporting VoIP telephony sessions between servers and terminal devices. IAX is similar to SIP but also has its own characteristic. For more information, please refer to RFC 5465.

To manually create new IAX user, go to Web GUI->**PBX->Basic/Call Routes->Extensions**. Click on "Create New User"->"Create New IAX Extension" and a new dialog window will show for users to fill in the extension information. The configuration parameters are as follows.

**Table 38: IAX Extension Configuration Parameters->Basic Settings**

| General                |  |
|------------------------|--|
| <b>Extension</b>       | The extension number associated with the user.   |
| <b>CallerID Number</b> | Configure the CallerID Number that would be applied for outbound calls from this user. |





|   |   |
|---|---|
|   | <b>Note:</b> The ability to manipulate your outbound Caller ID may be limited by your VoIP provider.  |
| <b>Permission</b>                           | Assign permission level to the user. The available permissions are "Internal", "Local", "National" and "International" from the lowest level to the highest level. The default setting is "Internal".<br><b>Note:</b> Users need to have the same level as or higher level than an outbound rule's privilege in order to make outbound calls using this rule.   |
| <b>SIP/IAX Password</b>                     | Configure the password for the user. A random secure password will be automatically generated. It is recommended to use this password for security purpose.   |
| <b>Enable Voicemail</b>                     | Enable voicemail for the user. The default setting is "Yes".  |
| <b>Voicemail Password</b>                   | Configure voicemail password (digits only) for the user to access the voicemail box. A random numeric password is automatically generated. It is recommended to use the random generated password for security purpose.   |
| <b>Skip Voicemail Password Verification</b> | When user dials voicemail code, the password verification IVR is skipped. If enabled, this would allow one-button voicemail access. By default this option is disabled.   |
| <b>Disable This Extension</b>               | If selected, this extension will be disabled on the UCM6200.<br><b>Note:</b> The disabled extension still exists on the PBX but can't be used on the end device.  |
| <b>User Settings</b>                        |   |
| <b>First Name</b>                           | Configure the first name of the user. The first name can contain characters, letters, digits and _.   |
| <b>Last Name</b>                            | Configure the last name of the user. The last name can contain characters, letters, digits and _.   |
| <b>Email Address</b>                        | Fill in the Email address for the user. Voicemail will be sent to this Email address.   |
| <b>User Password</b>                        | Configure the password for user portal access. A random numeric password is automatically generated. It is recommended to use the randomly generated password for security purpose.   |
| <b>Language</b>                             | Select the voice prompt language to be used for this extension. The default setting is "Default" which is the selected voice prompt language under web GUI-> <b>PBX-&gt;Internal Options-&gt;Language</b> . The dropdown list shows all the current available voice prompt languages on the UCM6200. To add more languages in the list, please download voice prompt package by selecting "Check Prompt List" under web UI-> <b>PBX-&gt;Internal Options-&gt;Language</b> . |

Table 39: IAX Extension Configuration Parameters->Media

|                            |   |
|----------------------------|---|
| <b>SIP Settings</b>        |   |
| <b>Max Number of Calls</b> | Configure the maximum number of calls allowed for each remote IP address. |





|                           |   |
|---------------------------|---|
| <b>Require Call Token</b> | Configure to enable/disable requiring call token. If set to "Auto", it might lock out users who depend on backward compatibility when peer authentication credentials are shared between physical endpoints. The default setting is "Yes".  |
| <b>SRTP</b>               | Enable SRTP for the call. The default setting is disabled.  |
| <b>Fax Mode</b>           | Select Fax Mode. The default setting is "None". <ul style="list-style-type: none"> <li>• None: Disable Fax. This is the default setting.</li> <li>• Fax Detect: Fax signal from the user/trunk during the call can be detected and the received Fax will be sent to the Email address configured for this extension. If no Email address can be found for the user, the Fax will be sent to the default Email address configured in Fax setting page under web UI-&gt;PBX-&gt;Internal Options-&gt;Fax/T.38.</li> </ul> |
| <b>Strategy</b>           | This option controls how the extension can be used on devices within different types of network. <ul style="list-style-type: none"> <li>• Allow All<br/>Device in any network can register this extension.</li> <li>• Local Subnet Only<br/>Only the user in specific subnet can register this extension. Up to three subnet addresses can be specified.</li> <li>• A Specific IP Address<br/>Only the device on the specific IP address can register this extension.</li> </ul> The default setting is "Allow All".    |
| <b>Codec Preference</b>   | Select audio and video codec for the extension. The available codecs are: PCMU, PCMA, GSM, AAL2-G.726-32, G.726, G.722, G.729, G.723, iLBC, ADPCM, H.264, H.263, H.263p and VP8.  |

**Table 40: IAX Extension Configuration Parameters->Features**

| <b>Call Transfer</b>              |   |
|-----------------------------------|---|
| <b>Call Forward Unconditional</b> | Configure the Call Forward Unconditional target number. If not configured, the Call Forward Unconditional feature is deactivated.<br>The default setting is deactivated.  |
| <b>CFU Time Condition</b>         | Select time condition for Call Forward Unconditional. CFU takes effect only during the selected time condition. The available time conditions are "Office Time", "Out of Office Time", "Holiday", "Out of Holiday", "Out of Office Time or Holiday" and "Specific".<br>Note: <ul style="list-style-type: none"> <li>• "Specific" has higher priority to "Office Times" if there is a conflict in terms of time period.</li> <li>• Specific time can be configured on the bottom of the extension configuration dialog. Scroll down the add Time Condition for specific time.</li> <li>• Office Time and Holiday could be configured on page Settings-&gt;Time Settings-&gt;Office Time/Holiday page.</li> </ul> |



|   |  |
|---|--|
| <b>Call Forward No Answer</b>                 | Configure the Call Forward No Answer target number. If not configured, the Call Forward No Answer feature is deactivated. The default setting is deactivated.  |
| <b>CFN Time Condition</b>                     | <p>Select time condition for Call Forward No Answer. The available time conditions are “Office Time”, “Out of Office Time”, “Holiday”, “Out of Holiday”, “Out of Office Time or Holiday” and “Specific”.</p> <p>Note:</p> <ul style="list-style-type: none"> <li>• “Specific” has higher priority to “Office Times” if there is a conflict in terms of time period.</li> <li>• Specific time can be configured on the bottom of the extension configuration dialog. Scroll down the add Time Condition for specific time.</li> <li>• Office Time and Holiday could be configured on page Settings-&gt;Time Settings-&gt;Office Time/Holiday page.</li> </ul> |
| <b>Call Forward Busy</b>                      | Configure the Call Forward Busy target number. If not configured, the Call Forward Busy feature is deactivated. The default setting is deactivated.  |
| <b>CFB Time Condition</b>                     | <p>Select time condition for Call Forward Busy. The available time conditions are “Office Time”, “Out of Office Time”, “Holiday”, “Out of Holiday”, “Out of Office Time or Holiday” and “Specific”.</p> <p>Note:</p> <ul style="list-style-type: none"> <li>• “Specific” has higher priority to “Office Times” if there is a conflict in terms of time period.</li> <li>• Specific time can be configured on the bottom of the extension configuration dialog. Scroll down the add Time Condition for specific time.</li> <li>• Office Time and Holiday could be configured on page Settings-&gt;Time Settings-&gt;Office Time/Holiday page.</li> </ul>      |
| <b>Ring Simultaneously</b>                    |  |
| <b>Ring Simultaneously</b>                    | Enable this option to have an external number ring simultaneously along with the extension. If a register trunk is used for outbound, the register number will be used to be displayed for the external number as caller ID number.  |
| <b>External Number</b>                        | Set the external number to be rang simultaneously. ‘-’ is the connection character which will be ignored.  |
| <b>Time Condition for Ring Simultaneously</b> | Ring the external number simultaneously along with the extension on the basis of this time condition.  |
| <b>Other Settings</b>                         |  |
| <b>Ring Timeout</b>                           | <p>Configure the number of seconds to ring the user before the call is forwarded to voicemail (voicemail is enabled) or hang up (voicemail is disabled). If not specified, the default ring timeout is 60 seconds on the UCM6200, which can be configured in the global ring timeout setting under web GUI-&gt;Internal Options-&gt;IVR Prompt: General Preference. The valid range is between 5 seconds and 600 seconds.</p> <p>Note:</p>   |



|   |  |
|---|--|
|   | If the end point also has a ring timeout configured, the actual ring timeout used is the shortest time set by either device.   |
| <b>Auto Record</b>                        | Enable automatic recording for the calls using this extension. The default setting is disabled. The recording files can be accessed under web GUI->CDR->Recording Files.   |
| <b>Skip Trunk Auth</b>                    | <ul style="list-style-type: none"> <li>• If set to "Yes", users can skip entering the password when making outbound calls.</li> <li>• If set to "By Time", users can skip entering the password when making outbound calls during the selected time condition.</li> <li>• If set to "No", users will be asked to enter the password when making outbound calls.</li> </ul> |
| <b>Time Condition for Skip Trunk Auth</b> | If "Skip Trunk Auth" is set to "By Time", select a time condition during which users can skip entering password when making outbound calls.  |
| <b>Dial Trunk Password</b>                | Configure personal password when making outbound calls via trunk.  |
| <b>Enable LDAP</b>                        | If enabled, the extension will be added to LDAP Phonebook PBX lists.   |
| <b>Music On Hold</b>                      | Configure the Music On Hold class to suggest to the bridged channel when putting them on hold.   |
| <b>Call Duration Limit</b>                | The maximum duration of call-blocking.   |

Table 41: IAX Extension Configuration Parameters->Specific Time

| Specific Time  |  |
|----------------|--|
| Time Condition | Click to add Time Condition to configure specific time for this extension. |

## Create New FXS Extension

The UCM6200 supports Foreign eXchange Subscriber (FXS) interface. FXS is used when user needs to connect analog phone lines or FAX machines to the UCM6200.

To manually create new FXS user, go to Web GUI->**PBX->Basic/Call Routes->Extensions**. Click on "Create New User"->"Create New FXS Extension" and a new dialog window will show for users to fill in the extension information. The configuration parameters are as follows.

Table 42: FXS Extension Configuration Parameters->Basic Settings

| General                 |  |
|-------------------------|--|
| <b>Extension</b>        | The extension number associated with the user.   |
| <b>Analog Station</b>   | Select the FXS port to be assigned for this extension.   |
| <b>Caller ID Number</b> | Configure the CallerID Number that would be applied for outbound calls from this user. <b>Note:</b><br>The ability to manipulate your outbound Caller ID may be limited by your VoIP |



|   |   |
|---|---|
|   | provider.   |
| <b>Permission</b>                           | Assign permission level to the user. The available permissions are "Internal", "Local", "National" and "International" from the lowest level to the highest level. The default setting is "Internal".<br><b>Note:</b><br>Users need to have the same level as or higher level than an outbound rule's privilege in order to make outbound calls using this rule.  |
| <b>Enable Voicemail</b>                     | Enable voicemail for the user. The default setting is "Yes".  |
| <b>Voicemail Password</b>                   | Configure voicemail password (digits only) for the user to access the voicemail box. A random numeric password is automatically generated. It is recommended to use the random generated password for security purpose.   |
| <b>Skip Voicemail Password Verification</b> | When user dials voicemail code, the password verification IVR is skipped. If enabled, this would allow one-button voicemail access. By default this option is disabled.   |
| <b>Disable This Extension</b>               | If selected, this extension will be disabled on the UCM6200.<br><b>Note:</b><br>The disabled extension still exists on the PBX but can't be used on the end device.   |
| <b>User Settings</b>                        |   |
| <b>First Name</b>                           | Configure the first name of the user. The first name can contain characters, letters, digits and _.   |
| <b>Last Name</b>                            | Configure the last name of the user. The last name can contain characters, letters, digits and _.   |
| <b>Email Address</b>                        | Fill in the Email address for the user. Voicemail will be sent to this Email address.   |
| <b>User Password</b>                        | Configure the password for user portal access. A random numeric password is automatically generated. It is recommended to use the randomly generated password for security purpose.   |
| <b>Language</b>                             | Select the voice prompt language to be used for this extension. The default setting is "Default" which is the selected voice prompt language under web GUI-> <b>PBX-&gt;Internal Options-&gt;Language</b> . The dropdown list shows all the current available voice prompt languages on the UCM6200. To add more languages in the list, please download voice prompt package by selecting "Check Prompt List" under web UI-> <b>PBX-&gt;Internal Options-&gt;Language</b> . |

Table 43: FXS Extension Configuration Parameters->Media

|                         |  |
|-------------------------|--|
| <b>Analog Settings</b>  |  |
| <b>Call Waiting</b>     | Configure to enable/disable call waiting feature. The default setting is "No".   |
| <b>User '#' as SEND</b> | If configured, the # key can be used as SNED key after dialing the number on the analog phone. The default setting is "Yes". |



|                                 |   |
|---------------------------------|---|
| <b>RX Gain</b>                  | Configure the RX gain for the receiving channel of analog FXS port. The valid range is -30dB to +6dB. The default setting is 0.   |
| <b>TX Gain</b>                  | Configure the TX gain for the transmitting channel of analog FXS port. The valid range is -30dB to +6dB. The default setting is 0.  |
| <b>MIN RX Flash</b>             | Configure the minimum period of time (in milliseconds) that the hook-flash must remain unpressed for the PBX to consider the event as a valid flash event. The valid range is 30ms to 1000ms. The default setting is 200ms.   |
| <b>MAX RX Flash</b>             | Configure the maximum period of time (in milliseconds) that the hook-flash must remain unpressed for the PBX to consider the event as a valid flash event. The minimum period of time is 256ms and it can't be modified. The default setting is 1250ms.   |
| <b>Enable Polarity Reversal</b> | If enabled, a polarity reversal will be marked as received when an outgoing call is answered by the remote party. For some countries, a polarity reversal is used for signaling the disconnection of a phone line and the call will be considered as hangup on a polarity reversal. The default setting is "Yes".   |
| <b>Echo Cancellation</b>        | Specify "ON", "OFF" or a value (the power of 2) from 32 to 1024 as the number of taps of cancellation.<br><b>Note:</b> When configuring the number of taps, the number 256 is not translated into 256ms of echo cancellation. Instead, 256 taps means $256/8 = 32$ ms. The default setting is "ON", which is 128 taps.  |
| <b>3-Way Calling</b>            | Configure to enable/disable 3-way calling feature on the user. The default setting is enabled.  |
| <b>Send CallerID After</b>      | Configure the number of rings before sending CID. Default setting is 1.   |
| <b>Fax Mode</b>                 | For FXS extension, there are three options available in Fax Mode. The default setting is "None". <ul style="list-style-type: none"> <li>• None: Disable Fax.</li> <li>• Fax Detect: Fax signal from the user/trunk during the call can be detected and the received Fax will be sent to the Email address configured for this extension. If no Email address can be found for the user, the Fax will be sent to the default Email address configured in Fax setting page under web UI-&gt;PBX-&gt;Internal Options-&gt;Fax/T.38.</li> <li>• Fax Gateway: If selected, the UCM6200 can support conversation and processing of Fax data from T.30 to T.38 or T.38 to T.30. This feature is only available for FXS or FXO port.</li> </ul> |

**Table 44: FXS Extension Configuration Parameters->Features**

| Call Transfer       |   |
|---------------------|---|
| <b>Call Forward</b> | Configure the Call Forward Unconditional target number. If not configured, the Call |



|                               |  |
|-------------------------------|--|
| <b>Unconditional</b>          | Forward Unconditional feature is deactivated. The default setting is deactivated.  |
| <b>CFU Time Condition</b>     | <p>Select time condition for Call Forward Unconditional. CFU takes effect only during the selected time condition. The available time conditions are “Office Time”, “Out of Office Time”, “Holiday”, “Out of Holiday”, “Out of Office Time or Holiday” and “Specific”.</p> <p>Note:</p> <ul style="list-style-type: none"> <li>• “Specific” has higher priority to “Office Times” if there is a conflict in terms of time period.</li> <li>• Specific time can be configured on the bottom of the extension configuration dialog. Scroll down the add Time Condition for specific time.</li> <li>• Office Time and Holiday could be configured on page Settings-&gt;Time Settings-&gt;Office Time/Holiday page.</li> </ul> |
| <b>Call Forward No Answer</b> | Configure the Call Forward No Answer target number. If not configured, the Call Forward No Answer feature is deactivated. The default setting is deactivated.  |
| <b>CFN Time Condition</b>     | <p>Select time condition for Call Forward No Answer. The available time conditions are “Office Time”, “Out of Office Time”, “Holiday”, “Out of Holiday”, “Out of Office Time or Holiday” and “Specific”.</p> <p>Note:</p> <ul style="list-style-type: none"> <li>• “Specific” has higher priority to “Office Times” if there is a conflict in terms of time period.</li> <li>• Specific time can be configured on the bottom of the extension configuration dialog. Scroll down the add Time Condition for specific time.</li> <li>• Office Time and Holiday could be configured on page Settings-&gt;Time Settings-&gt;Office Time/Holiday page.</li> </ul>   |
| <b>Call Forward Busy</b>      | Configure the Call Forward Busy target number. If not configured, the Call Forward Busy feature is deactivated. The default setting is deactivated.  |
| <b>CFB Time Condition</b>     | <p>Select time condition for Call Forward Busy. The available time conditions are “Office Time”, “Out of Office Time”, “Holiday”, “Out of Holiday”, “Out of Office Time or Holiday” and “Specific”.</p> <p>Note:</p> <ul style="list-style-type: none"> <li>• “Specific” has higher priority to “Office Times” if there is a conflict in terms of time period.</li> <li>• Specific time can be configured on the bottom of the extension configuration dialog. Scroll down the add Time Condition for specific time.</li> <li>• Office Time and Holiday could be configured on page Settings-&gt;Time Settings-&gt;Office Time/Holiday page.</li> </ul>  |
| <b>CC Settings</b>            |  |
| <b>Enable CC</b>              | If enabled, UCM6200 will automatically alert this extension when a called party is available, given that a previous call to that party failed for some reason.   |
| <b>Ring Simultaneously</b>    |  |
| <b>Ring</b>                   | Enable this option to have an external number ring simultaneously along with the   |



|   |  |
|---|--|
| <b>Simultaneously</b>                         | extension. If a register trunk is used for outbound, the register number will be used to be displayed for the external number as caller ID number.   |
| <b>External Number</b>                        | Set the external number to be rang simultaneously. '-' is the connection character which will be ignored.  |
| <b>Time Condition for Ring Simultaneously</b> | Ring the external number simultaneously along with the extension on the basis of this time condition.  |
| <b>Hotline</b>                                |  |
| <b>Enable Hotline</b>                         | If enabled, hotline dialing plan will be activated, a pre-configured number will be used according to the selected Hotline Type.   |
| <b>Hotline Number</b>                         | Configure the Hotline Number   |
| <b>Hotline Type</b>                           | Configure the Hotline Type: <ul style="list-style-type: none"> <li>• <b>Immediate Hotline:</b> When the phone is off-hook, UCM6200 will immediately dial the preset number</li> <li>• <b>Delay Hotline:</b> When the phone is off-hook, if there is no dialing within 5 seconds, UCM6200 will dial the preset number.</li> </ul>   |
| <b>Other Settings</b>                         |  |
| <b>Ring Timeout</b>                           | Configure the number of seconds to ring the user before the call is forwarded to voicemail (voicemail is enabled) or hang up (voicemail is disabled). If not specified, the default ring timeout is 60 seconds on the UCM6200, which can be configured in the global ring timeout setting under web GUI->Internal Options->IVR Prompt: General Preference. The valid range is between 5 seconds and 600 seconds.<br>Note: If the end point also has a ring timeout configured, the actual ring timeout used is the shortest time set by either device. |
| <b>Auto Record</b>                            | Enable automatic recording for the calls using this extension. The default setting is disabled. The recording files can be accessed under web GUI->CDR->Recording Files.   |
| <b>Skip Trunk Auth</b>                        | <ul style="list-style-type: none"> <li>• If set to "Yes", users can skip entering the password when making outbound calls.</li> <li>• If set to "By Time", users can skip entering the password when making outbound calls during the selected time condition.</li> <li>• If set to "No", users will be asked to enter the password when making outbound calls.</li> </ul>   |
| <b>Time Condition for Skip Trunk Auth</b>     | If "Skip Trunk Auth" is set to "By Time", select a time condition during which users can skip entering password when making outbound calls.  |
| <b>Dial Trunk Password</b>                    | Configure personal password when making outbound calls via trunk.  |
| <b>Enable LDAP</b>                            | If enabled, this extension will be added to LDAP Phonebook PBX list; if disabled, this extension will be skipped when creating LDAP Phonebook.   |
| <b>Music On Hold</b>                          | Select which Music On Hold class to suggest to extension when putting the active call  |





|                            |  |
|----------------------------|--|
|                            | on hold.   |
| <b>Call Duration Limit</b> | Configure the maximum duration of call-blocking. |

**Table 45: FXS Extension Configuration Parameters->Specific Time**

| Specific Time         |  |
|-----------------------|--|
| <b>Time Condition</b> | Click to add Time Condition to configure specific time for this extension. |

## Batch Add Extensions

### Batch Add SIP Extensions

In order to add multiple SIP extensions, BATCH add can be used to create standardized SIP extension accounts. However, unique extension user name can't be set using BATCH add.

Under Web GUI->**PBX->Basic/Call Routes->Extensions**, click on "Batch Add Extensions"->"Batch Add SIP Extensions".

**Table 46: Batch Add SIP Extension Parameters**

| General                      |   |
|------------------------------|---|
| <b>Start Extension</b>       | Configure the starting extension number of the batch of extensions to be added.   |
| <b>Create Number</b>         | Specify the number of extensions to be added. The default setting is 5.   |
| <b>Extension Interval</b>    | Specify the interval between extensions as preferred when creating a batch of extension.  |
| <b>Permission</b>            | Assign permission level to the user. The available permissions are "Internal", "Local", "National" and "International" from the lowest level to the highest level. The default setting is "Internal".<br><b>Note:</b> Users need to have the same level as or higher level than an outbound rule's privilege in order to make outbound calls from this rule.  |
| <b>Enable Voicemail</b>      | Enable Voicemail for the user. The default setting is "Yes".  |
| <b>Enable WebRTC Support</b> | Enable WebRTC support.  |
| <b>SIP/IAX Password</b>      | Configure the SIP/IAX password for the users. Three options are available to create password for the batch of extensions. <ul style="list-style-type: none"> <li>• User Random Password.<br/>A random secure password will be automatically generated. It is recommended to use this password for security purpose.</li> <li>• Use Extension as Password.</li> <li>• Enter a password to be used on all the extensions in the batch.</li> </ul> |
| <b>Voicemail Password</b>    | Configure Voicemail password (digits only) for the users. <ul style="list-style-type: none"> <li>• User Random Password.<br/>A random password in digits will be automatically generated. It is recommended</li> </ul>  |





|   |   |
|---|---|
|   | <p>to use this password for security purpose.</p> <ul style="list-style-type: none"> <li>• Use Extension as Password.</li> <li>• Enter a password to be used on all the extensions in the batch.</li> </ul>   |
| <b>CallerID Number</b>                      | <p>Configure CallerID Number when adding Batch Extensions.</p> <ul style="list-style-type: none"> <li>• Use Extension as Number<br/>Users can choose to use the extension number as CallerID</li> <li>• Use as Number<br/>Users can choose to set a specific number instead of using the extension number as CallerID.</li> </ul>   |
| <b>Ring Timeout</b>                         | <p>Configure the number of seconds to ring the user before the call is forwarded to voicemail (voicemail is enabled) or hang up (voicemail is disabled). If not specified, the default ring timeout is 60 seconds on the UCM6200, which can be configured in the global ring timeout setting under web GUI-&gt;<b>Internal Options-&gt;IVR Prompt: General Preference</b>. The valid range is between 5 seconds and 600 seconds.</p> <p><b>Note:</b><br/>If the end point also has a ring timeout configured, the actual ring timeout used is the shortest time set by either device.</p> |
| <b>Auto Record</b>                          | <p>Enable automatic recording for the calls using this extension. The default setting is disabled. The recording files can be accessed under web GUI-&gt;<b>CDR-&gt;Recording Files</b>.</p>  |
| <b>Skip Voicemail Password Verification</b> | <p>When user dials voicemail code, the password verification IVR is skipped. If enabled, this would allow one-button voicemail access. By default this option is disabled.</p>  |
| <b>Music On Hold</b>                        | <p>Select which Music On Hold class to suggest to extensions when putting them on hold.</p>   |
| <b>Enable LDAP</b>                          | <p>If enabled, the batch added extensions will be added to LDAP Phonebook PBX list; if disabled, the batch added extensions will be skipped when creating LDAP Phonebook.</p>   |
| <b>Enable WebRTC Support</b>                | <p>If enabled, extensions will be able to login to user portal and use Web RTC features.</p>  |
| <b>Call Duration Limit</b>                  | <p>Configure the maximum duration of call-blocking.</p>   |
| <b>SIP Settings</b>                         |   |
| <b>NAT</b>                                  | <p>Use NAT when the PBX is on a public IP communicating with devices hidden behind NAT (e.g., broadband router). If there is one-way audio issue, usually it's related to NAT configuration or Firewall's support of SIP and RTP ports. The default setting is enabled.</p>   |
| <b>Can Direct Media</b>                     | <p>By default, the PBX will route the media streams from SIP endpoints through itself. If enabled, the PBX will attempt to negotiate with the endpoints to route the media stream directly. It is not always possible for the PBX to negotiate endpoint-to-endpoint</p>   |



|                                 |   |
|---------------------------------|---|
|                                 | media routing. The default setting is "No".   |
| <b>DTMF Mode</b>                | Select DTMF mode for the user to send DTMF. The default setting is "RFC2833". If "Info" is selected, SIP INFO message will be used. If "Inband" is selected, 64-kbit codec PCMU and PCMA are required. When "Auto" is selected, RFC2833 will be used if offered, otherwise "Inband" will be used.   |
| <b>Enable Keep-alive</b>        | If enabled, empty SDP packet will be sent to the SIP server periodically to keep the NAT port open. The default setting is "Yes".   |
| <b>Keep-alive Frequency</b>     | Configure the number of seconds for the host to be up for Keep-alive. The default setting is 60 seconds.  |
| <b>TEL URI</b>                  | If the end device/phone has an assigned PSTN telephone number, this field should be set to "User=Phone". Then a "User=Phone" parameter will be attached to the Request-Line and TO header in the SIP request to indicate the E.164 number. If set to "Enable", "Tel:" will be used instead of "SIP:" in the SIP request. The default setting is disabled.   |
| <b>Concurrent Registrations</b> | The maximum endpoints which can be registered into this extension. For security concerns, the default value is 1.   |
| <b>Other Settings</b>           |   |
| <b>SRTP</b>                     | Enable SRTP for the call. The default setting is "No".  |
| <b>Fax Mode</b>                 | Select Fax mode for this user. The default setting is "None". <ul style="list-style-type: none"> <li>• None: Disable Fax.</li> <li>• Fax Detect: Fax signal from the user/trunk during the call can be detected and the received Fax will be sent to the Email address configured for this extension. If no Email address can be found for the user, the Fax will be sent to the default Email address configured in Fax setting page under web UI-&gt;PBX-&gt;Internal Options-&gt;Fax/T.38.</li> </ul>              |
| <b>Strategy</b>                 | This option controls how the extension can be used on devices within different types of network. The default setting is "Allow All". <ul style="list-style-type: none"> <li>• Allow All<br/>Device in any network can register this extension.</li> <li>• Local Subnet Only<br/>Only the user in specific subnet can register this extension. Up to three subnet addresses can be specified.</li> <li>• A Specific IP Address.<br/>Only the device on the specific IP address can register this extension.</li> </ul> |
| <b>Enable T.38 UDPTL</b>        | Enable or disable T.38 UDPTL Support.   |
| <b>Skip Trunk Auth</b>          | If enable "All", users do not need to enter password when making an outbound call. If enable "Follow Me", the user can dial out via follow me without password.   |
| <b>Codec Preference</b>         | Select audio and video codec for the extension. The available codecs are: PCMU,   |



PCMA, GSM, AAL2-G.726-32, G.722, G.729, G.723, Ilbc, ADPCM, LPC10, H.264, H.263, H.263p and VP8.

## Batch Add IAX Extensions

Under Web GUI->**PBX->Basic/Call Routes->Extensions**, click on “Batch Add Extensions”->”Batch Add IAX Extensions”.

**Table 47: Batch Add IAX Extension Parameters**

| General                   |  |
|---------------------------|--|
| <b>Start Extension</b>    | Configure the starting extension number of the batch of extensions to be added.  |
| <b>Create Number</b>      | Specify the number of extensions to be added. The default setting is 5.  |
| <b>Permission</b>         | <p>Assign permission level to the user. The available permissions are “Internal”, “Local”, “National” and “International” from the lowest level to the highest level. The default setting is “Internal”.</p> <p><b>Note:</b></p> <p>Users need to have the same level as or higher level than an outbound rule’s privilege in order to make outbound calls from this rule.</p>   |
| <b>Enable Voicemail</b>   | Enable Voicemail for the user. The default setting is “Yes”.   |
| <b>SIP/IAX Password</b>   | <p>Configure the SIP/IAX password for the users. Three options are available to create password for the batch of extensions.</p> <ul style="list-style-type: none"> <li>• User Random Password.<br/>A random secure password will be automatically generated. It is recommended to use this password for security purpose.</li> <li>• Use Extension as Password.</li> <li>• Enter a password to be used on all the extensions in the batch.</li> </ul>   |
| <b>Voicemail Password</b> | <p>Configure Voicemail password (digits only) for the users.</p> <ul style="list-style-type: none"> <li>• User Random Password.<br/>A random password in digits will be automatically generated. It is recommended to use this password for security purpose.</li> <li>• Use Extension as Password.</li> <li>• Enter a password to be used on all the extensions in the batch.</li> </ul>  |
| <b>Ring Timeout</b>       | <p>Configure the number of seconds to ring the user before the call is forwarded to voicemail (voicemail is enabled) or hang up (voicemail is disabled). If not specified, the default ring timeout is 60 seconds on the UCM6200, which can be configured in the global ring timeout setting under web GUI-&gt;<b>Internal Options-&gt;IVR Prompt: General Preference</b>. The valid range is between 5 seconds and 600 seconds.</p> <p><b>Note:</b></p> <p>If the end point also has a ring timeout configured, the actual ring timeout used is the shortest time set by either device.</p> |






|   |   |
|---|---|
| <b>Auto Record</b>                          | Enable automatic recording for the calls using this extension. The default setting is disabled. The recording files can be accessed under web GUI-> <b>CDR-&gt;Recording Files</b> .  |
| <b>Skip Voicemail Password Verification</b> | When user dials voicemail code, the password verification IVR is skipped. If enabled, this would allow one-button voicemail access. By default this option is disabled.   |
| <b>Music On Hold</b>                        | Select which Music On Hold class to suggest to extensions when putting them on hold.  |
| <b>Enable LDAP</b>                          | If enabled, the batch added extensions will be added to LDAP Phonebook PBX list; if disabled, the batch added extensions will be skipped when creating LDAP Phonebook.  |
| <b>Call Duration Limit</b>                  | Configure the maximum duration of call-blocking.  |
| <b>IAX Settings</b>                         |   |
| <b>Max Number of Calls</b>                  | Configure the maximum number of calls allowed for each remote IP address.   |
| <b>Require Call Token</b>                   | Configure to enable/disable requiring call token. If set to "Auto", it might lock out users who depend on backward compatibility when peer authentication credentials are shared between physical endpoints. The default setting is "Yes".  |
| <b>Other Settings</b>                       |   |
| <b>SRTP</b>                                 | Enable SRTP for the call. The default setting is "No".  |
| <b>Fax Mode</b>                             | Select Fax Mode for this user. The default setting is "None". <ul style="list-style-type: none"> <li>• None: Disable Fax.</li> <li>• Fax Detect: Fax signal from the user/trunk during the call can be detected and the received Fax will be sent to the Email address configured for this extension. If no Email address can be found for the user, the Fax will be sent to the default Email address configured in Fax setting page under web UI-&gt;<b>PBX-&gt;Internal Options-&gt;Fax/T.38</b>.</li> </ul>       |
| <b>Strategy</b>                             | This option controls how the extension can be used on devices within different types of network. <ul style="list-style-type: none"> <li>• Allow All<br/>Device in any network can register this extension.</li> <li>• Local Subnet Only<br/>Only the user in specific subnet can register this extension. Up to three subnet addresses can be specified.</li> <li>• A Specific IP Address.<br/>Only the device on the specific IP address can register this extension.</li> </ul> The default setting is "Allow All". |
| <b>Skip Trunk Auth</b>                      | If enable "All", users do not need to enter password when making an outbound call. If enable "Follow Me", the call can dial out via follow me without password.   |
| <b>Codec Preference</b>                     | Select audio and video codec for the extension. The available codecs are: PCMU,   |



PCMA, GSM, AAL2-G.726-32, G.722, G.729, G.723, iLBC, ADPCM, LPC10, H.264, H.263, H.263p and VP8.

## Search and Edit Extension

All the UCM6200 extensions are listed under Web GUI->**PBX->Basic/Call Routes->Extensions**, with status, Extension, CallerID Name, Technology (SIP, IAX and FXS), IP and Port. Each extension has a checkbox for users to "Modify Selected Extensions" or "Delete Selected Extensions". Also, options "Edit" , "Reboot"  and "Delete"  are available per extension. User can search an extension by specifying the extension number to find an extension quickly.

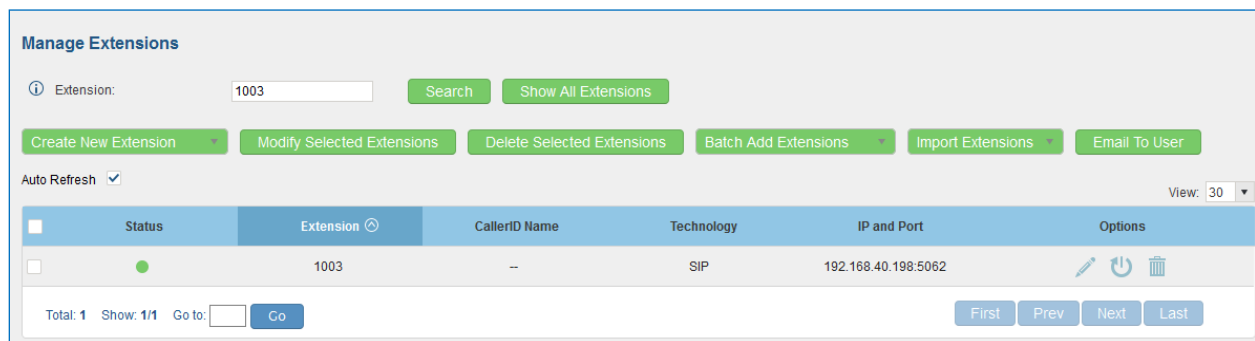







Figure 95: Manage Extensions

- **Status**


Users can see the following icon for each extension to indicate the SIP status.

-  Green: Free
-  Blue: Ringing
-  Yellow: In Use
-  Grey: Unavailable (the extension is not registered or disabled on the PBX)

- **Edit single extension**


Click on  to start editing the extension parameters.

- **Reboot the user**

Click on  to send NOTIFY reboot event to the device which has an UCM6200 extension already registered. To successfully reboot the user, "Zero Config" needs to be enabled on the UCM6200 web GUI->**PBX->Zero Config->Auto Provisioning Settings**.



- **Delete single extension**

Click on  to delete the extension. Or select the checkbox of the extension and then click on "Delete Selected Extensions".

- **Modify selected extensions**


Select the checkbox for the extension(s). Then click on "Modify Selected Extensions" to edit the extensions in a batch.

- **Delete selected extensions**

Select the checkbox for the extension(s). Then click on "Delete Selected Extensions" to delete the extension(s).

## Export Extensions

The extensions configured on the UCM6200 can be exported to csv format file with selected technology "SIP", "IAX" or "FXS". Click on "Export Extensions" button and select technology in the prompt below.

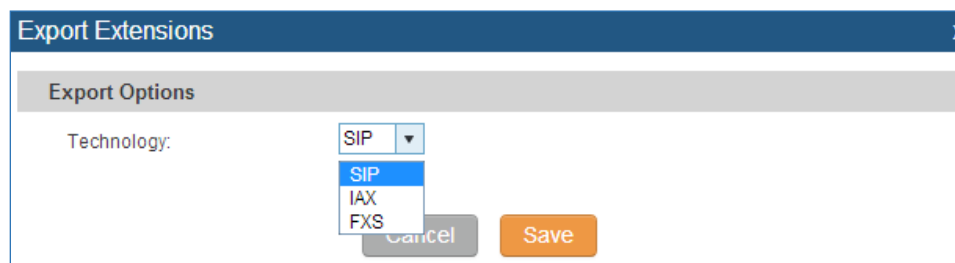

**Figure 96: Export Extensions**


The exported csv file can serve as a template for users to fill in desired extension information to be imported to the UCM6200.

## Import Extensions


The capability to import extensions to the UCM6200 provides users flexibility to batch add extensions with similar or different configuration quickly into the PBX system.

1. Export extension csv file from the UCM6200 by clicking on "Export Extensions" button.
2. Fill up the extension information you would like in the exported csv template.
3. Click on "Import Extensions" button. The following dialog will be prompted.



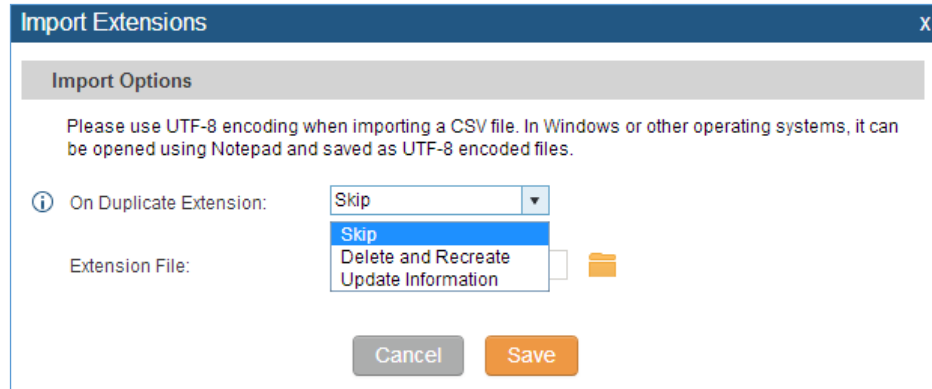

**Figure 97: Import Extensions**

4. Select the option in "On Duplicate Extension" to define how the duplicate extension(s) in the imported csv file should be treated by the PBX.
  - **Skip:** Duplicate extensions in the csv file will be skipped. The PBX will keep the current extension information as previously configured without change.
  - **Delete and Recreate:** The current extension previously configured will be deleted and the duplicate extension in the csv file will be loaded to the PBX.
  - **Update Information:** The current extension previously configured in the PBX will be kept. However, if the duplicate extension in the csv file has different configuration for any options, it will override the configuration for those options in the extension.
5. Click on  to select csv file from local directory in the PC.
6. Click on "Save" to import the csv file.
7. Click on "Apply Changes" to apply the imported file on the UCM6200.

### Notes

The imported file should look like the following:

| A         | B          | C                | D        | E                | F       | G              | H                     | I            | J           | K    | L        | M         | N              |           |
|-----------|------------|------------------|----------|------------------|---------|----------------|-----------------------|--------------|-------------|------|----------|-----------|----------------|-----------|
| Extension | Technology | Enable Voicemail | CallerID | SIP/IAX Password | Voicema | Skip Voicemail | Password Verification | Ring Timeout | Auto Record | SRTP | Fax Mode | Strategy  | Local Subnet 1 | Local Sub |
| 1000      | SIP        | yes              | 1000     | admin123         | 61783   | no             |                       |              | no          | no   | None     | Allow All |                |           |
| 1001      | SIP        | yes              | 1001     | admin123         | 955921  | no             |                       |              | no          | no   | None     | Allow All |                |           |
| 1002      | SIP        | yes              | 1002     | admin123         | 269824  | no             |                       |              | no          | no   | None     | Allow All |                |           |
| 1003      | SIP        | yes              | 1003     | admin123         | 363196  | no             |                       |              | no          | no   | None     | Allow All |                |           |
| 1004      | SIP        | yes              | 1004     | admin123         | 12860   | no             |                       |              | no          | no   | None     | Allow All |                |           |

**Figure 98: Import File**

**Table 48: SIP extensions Imported File Example**

| Field            | Supported values |
|------------------|------------------|
| Extension        | Digits           |
| Technology       | SIP/SIP(WebRTC)  |
| Enable Voicemail | yes/no           |
| CallerID Number  | Digits           |



|   |  |
|---|--|
| <b>SIP/IAX Password</b>                     | Alphanumeric characters  |
| <b>Voicemail Password</b>                   | Digits   |
| <b>Skip Voicemail Password Verification</b> | yes/no   |
| <b>Ring Timeout</b>                         | Empty/ 3 to 600 (in second)  |
| <b>SRTP</b>                                 | yes/no   |
| <b>Fax Mode</b>                             | None/Fax Detection   |
| <b>Strategy</b>                             | Allow All/Local Subnet Only/A Specific IP Address  |
| <b>Local Subnet 1</b>                       | IP address/Mask  |
| <b>Local Subnet 2</b>                       | IP address/Mask  |
| <b>Local Subnet 3</b>                       | IP address/Mask  |
| <b>Local Subnet 4</b>                       | IP address/Mask  |
| <b>Local Subnet 5</b>                       | IP address/Mask  |
| <b>Local Subnet 6</b>                       | IP address/Mask  |
| <b>Local Subnet 7</b>                       | IP address/Mask  |
| <b>Local Subnet 8</b>                       | IP address/Mask  |
| <b>Local Subnet 9</b>                       | IP address/Mask  |
| <b>Local Subnet 10</b>                      | IP address/Mask  |
| <b>Specific IP Address</b>                  | IP address   |
| <b>Skip Trunk Auth</b>                      | yes/no/bytime  |
| <b>Codec Preference</b>                     | PCMU,PCMA,GSM,G.726,G.722,G.729,H.264,ILBC,AAL2-G.726-32,ADPCM,G.723,H.263,H.263p,vp8,opus |
| <b>Permission</b>                           | Internal/Local/National/International  |
| <b>NAT</b>                                  | yes/no   |
| <b>DTMF Mode</b>                            | RFC2833/info/inband/auto   |
| <b>Insecure</b>                             | Port   |
| <b>Enable Keep-alive</b>                    | Yes/no   |
| <b>Keep-alive Frequency</b>                 | Value from 1-3600  |
| <b>AuthID</b>                               | Alphanumeric value without special characters  |
| <b>TEL URI</b>                              | Disabled/user=phone/enabled  |
| <b>Call Forward Busy</b>                    | Digits   |
| <b>Call Forward No Answer</b>               | Digits   |
| <b>Call Forward Unconditional</b>           | Digits   |
| <b>Support Hot-Desking Mode</b>             | Yes/no   |
| <b>Dial Trunk Password</b>                  | Digits   |
| <b>Disable This Extension</b>               | Yes/no   |
| <b>CFU Time Condition</b>                   | All time/Office time/out of office time/holiday/out of                                     |





|   |   |
|---|---|
|   | holiday/out of office time or holiday/specific time   |
| <b>CFN Time Condition</b>                     | All time/Office time/out of office time/holiday/out of holiday/out of office time or holiday/specific time  |
| <b>CFB Time Condition</b>                     | All time/Office time/out of office time/holiday/out of holiday/out of office time or holiday/specific time  |
| <b>Music On Hold</b>                          | Default/ringbacktone_default  |
| <b>CC Agent Policy</b>                        | If CC is disabled use: never<br>If CC is set to normal use: generic<br>If CC is set to trunk use: native  |
| <b>CC Monitor Policy</b>                      | Generic/never   |
| <b>CCBS Available Timer</b>                   | 3600/4800   |
| <b>CCNR Available Timer</b>                   | 3600/7200   |
| <b>CC Offer Timer</b>                         | 60/120  |
| <b>CC Max Agents</b>                          | Value from 1-999  |
| <b>CC Max Monitors</b>                        | Value from 1-999  |
| <b>Ring simultaneously</b>                    | Yes/no  |
| <b>External Number</b>                        | Digits  |
| <b>Time Condition for Ring Simultaneously</b> | All time/Office time/out of office time/holiday/out of holiday/out of office time or holiday/specific time  |
| <b>Time Condition for Skip Trunk Auth</b>     | All time/Office time/out of office time/holiday/out of holiday/out of office time or holiday/specific time  |
| <b>Enable LDAP</b>                            | Yes/no  |
| <b>Enable T.38 UDPTL</b>                      | Yes/no  |
| <b>Max Contacts</b>                           | Values from 1-10  |
| <b>Enable WebRTC</b>                          | Yes/no  |
| <b>Alert-Info</b>                             | None/Ring 1/Ring2/Ring3/Ring 4/Ring 5/Ring 6/Ring 7/<br>Ring 8/Ring 9/Ring 10/bellcore-dr1/bellcore-dr2/<br>bellcore-dr3/ bellcore-dr4/ bellcore-dr5/custom |
| <b>Do Not Disturb</b>                         | Yes/no  |
| <b>DND Time Condition</b>                     | All time/Office time/out of office time/holiday/out of holiday/out of office time or holiday/specific time  |
| <b>Custom Autoanswer</b>                      | Yes/no  |
| <b>Do Not Disturb Whitelist</b>               | Empty/digits  |
| <b>User Password</b>                          | Alphanumeric characters.  |
| <b>First Name</b>                             | Alphanumeric without special characters.  |
| <b>Last Name</b>                              | Alphanumeric without special characters.  |
| <b>Email Address</b>                          | Email address   |



|                                  |   |
|----------------------------------|---|
| <b>Language</b>                  | Default/en/zh                           |
| <b>Phone Number</b>              | Digits                                  |
| <b>Call-Barging Monitor</b>      | Extensions allowed to call barging      |
| <b>Seamless Transfer Members</b> | Extensions allowed to seamless transfer |

**Table 49: IAX extensions Imported File Example**

| <b>Field</b>                                | <b>Supported values</b>  |
|---|--|
| <b>Extension</b>                            | Digits   |
| <b>Technology</b>                           | IAX  |
| <b>Enable Voicemail</b>                     | yes/no   |
| <b>CallerID Number</b>                      | Digits   |
| <b>SIP/IAX Password</b>                     | Alphanumeric characters  |
| <b>Voicemail Password</b>                   | Digits   |
| <b>Skip Voicemail Password Verification</b> | yes/no   |
| <b>Ring Timeout</b>                         | Empty/ 3 to 600 (in second)  |
| <b>SRTP</b>                                 | yes/no   |
| <b>Fax Mode</b>                             | None/Fax Detection   |
| <b>Strategy</b>                             | Allow All/Local Subnet Only/A Specific IP Address  |
| <b>Local Subnet 1</b>                       | IP address/Mask  |
| <b>Local Subnet 2</b>                       | IP address/Mask  |
| <b>Local Subnet 3</b>                       | IP address/Mask  |
| <b>Local Subnet 4</b>                       | IP address/Mask  |
| <b>Local Subnet 5</b>                       | IP address/Mask  |
| <b>Local Subnet 6</b>                       | IP address/Mask  |
| <b>Local Subnet 7</b>                       | IP address/Mask  |
| <b>Local Subnet 8</b>                       | IP address/Mask  |
| <b>Local Subnet 9</b>                       | IP address/Mask  |
| <b>Local Subnet 10</b>                      | IP address/Mask  |
| <b>Specific IP Address</b>                  | IP address   |
| <b>Skip Trunk Auth</b>                      | yes/no/bytime  |
| <b>Codec Preference</b>                     | PCMU,PCMA,GSM,G.726,G.722,G.729,H.264,ILBC,AAL2-G.726-32,ADPCM,G.723,H.263,H.263p,vp8,opus |
| <b>Permission</b>                           | Internal/Local/National/International  |
| <b>NAT</b>                                  | yes/no   |
| <b>Call Forward Busy</b>                    | Digits   |
| <b>Call Forward No Answer</b>               | Digits   |



|   |  |
|---|--|
| <b>Call Forward Unconditional</b>             | Digits   |
| <b>Require Call Token</b>                     | Yes/no/auto  |
| <b>Max Number of Calls</b>                    | Values from 1-512  |
| <b>Dial Trunk Password</b>                    | Digits   |
| <b>Disable This Extension</b>                 | Yes/no   |
| <b>CFU Time Condition</b>                     | All time/Office time/out of office time/holiday/out of holiday/out of office time or holiday/specific time |
| <b>CFN Time Condition</b>                     | All time/Office time/out of office time/holiday/out of holiday/out of office time or holiday/specific time |
| <b>CFB Time Condition</b>                     | All time/Office time/out of office time/holiday/out of holiday/out of office time or holiday/specific time |
| <b>Music On Hold</b>                          | Default/ringbacktone_default   |
| <b>Ring simultaneously</b>                    | Yes/no   |
| <b>External Number</b>                        | Digits   |
| <b>Time Condition for Ring Simultaneously</b> | All time/Office time/out of office time/holiday/out of holiday/out of office time or holiday/specific time |
| <b>Time Condition for Skip Trunk Auth</b>     | All time/Office time/out of office time/holiday/out of holiday/out of office time or holiday/specific time |
| <b>Enable LDAP</b>                            | Yes/no   |
| <b>Limit Max time (s)</b>                     | empty  |
| <b>Do Not Disturb</b>                         | Yes/no   |
| <b>DND Time Condition</b>                     | All time/Office time/out of office time/holiday/out of holiday/out of office time or holiday/specific time |
| <b>Do Not Disturb Whitelist</b>               | Empty/digits   |
| <b>User Password</b>                          | Alphanumeric characters.   |
| <b>First Name</b>                             | Alphanumeric without special characters.   |
| <b>Last Name</b>                              | Alphanumeric without special characters.   |
| <b>Email Address</b>                          | Email address  |
| <b>Language</b>                               | Default/en/zh  |
| <b>Phone Number</b>                           | Digits   |
| <b>Call-Barging Monitor</b>                   | Extensions allowed to call barging   |
| <b>Seamless Transfer Members</b>              | Extensions allowed to seamless transfer  |



Table 50: FXS extensions Imported File Example


| Field                                | Supported values   |
|--------------------------------------|--|
| Extension                            | Digits   |
| Technology                           | FXS  |
| Analog Station                       | FXS1/FXS2  |
| Enable Voicemail                     | yes/no   |
| CallerID Number                      | Digits   |
| Voicemail Password                   | Digits   |
| Skip Voicemail Password Verification | yes/no   |
| Ring Timeout                         | Empty/ 3 to 600 (in second)  |
| Auto Record                          | yes/no   |
| Fax Mode                             | None/Fax Detection   |
| Skip Trunk Auth                      | Yes/no/bytime  |
| Permission                           | Internal/Local/National/International  |
| Call Forward Busy                    | Digits   |
| Call Forward No Answer               | Digits   |
| Call Forward Unconditional           | Digits   |
| Call Waiting                         | Yes/no   |
| Use # as SEND                        | Yes/no   |
| RX Gain                              | Values from -30 -> 6   |
| TX Gain                              | Values from -30 -> 6   |
| MIN RX Flash                         | Values from: 30 – 1000   |
| MAX RX Flash                         | Values from: 40 – 2000   |
| Enable Polarity Reversal             | Yes/no   |
| Echo Cancellation                    | On/Off/32/64/128/256/512/1024  |
| 3-Way Calling                        | Yes/no   |
| Send CallerID After                  | 1/2  |
| Dial Trunk Password                  | digits   |
| Disable This Extension               | Yes/no   |
| CFU Time Condition                   | All time/Office time/out of office time/holiday/out of holiday/out of office time or holiday/specific time |
| CFN Time Condition                   | All time/Office time/out of office time/holiday/out of holiday/out of office time or holiday/specific time |
| CFB Time Condition                   | All time/Office time/out of office time/holiday/out of holiday/out of office time or holiday/specific time |
| Music On Hold                        | Default/ringbacktone_default   |



|   |  |
|---|--|
| <b>CC Agent Policy</b>                        | If CC is disabled use: never<br>If CC is set to normal use: generic<br>If CC is set to trunk use: native   |
| <b>CC Monitor Policy</b>                      | Generic/never  |
| <b>CCBS Available Timer</b>                   | 3600/4800  |
| <b>CCNR Available Timer</b>                   | 3600/7200  |
| <b>CC Offer Timer</b>                         | 60/120   |
| <b>CC Max Agents</b>                          | Value from 1-999   |
| <b>CC Max Monitors</b>                        | Value from 1-999   |
| <b>Ring simultaneously</b>                    | Yes/no   |
| <b>External Number</b>                        | Digits   |
| <b>Time Condition for Ring Simultaneously</b> | All time/Office time/out of office time/holiday/out of holiday/out of office time or holiday/specific time |
| <b>Time Condition for Skip Trunk Auth</b>     | All time/Office time/out of office time/holiday/out of holiday/out of office time or holiday/specific time |
| <b>Enable LDAP</b>                            | Yes/no   |
| <b>Enable Hotline</b>                         | Yes/no   |
| <b>Hotline Type</b>                           | Immediate hotline/delay hotline  |
| <b>Hotline Number</b>                         | digits   |
| <b>Limit Max time (s)</b>                     | empty  |
| <b>Do Not Disturb</b>                         | Yes/no   |
| <b>DND Time Condition</b>                     | All time/Office time/out of office time/holiday/out of holiday/out of office time or holiday/specific time |
| <b>Do Not Disturb Whitelist</b>               | Empty/digits   |
| <b>User Password</b>                          | Alphanumeric characters.   |
| <b>First Name</b>                             | Alphanumeric without special characters.   |
| <b>Last Name</b>                              | Alphanumeric without special characters.   |
| <b>Email Address</b>                          | Email address  |
| <b>Language</b>                               | Default/en/zh  |
| <b>Phone Number</b>                           | Digits   |
| <b>Call-Barging Monitor</b>                   | Extensions allowed to call barging   |
| <b>Seamless Transfer Members</b>              | Extensions allowed to seamless transfer  |


The CSV file should contain all the above fields, if one of them is missing or empty, the UCM6200 will display the following error message for missing fields.



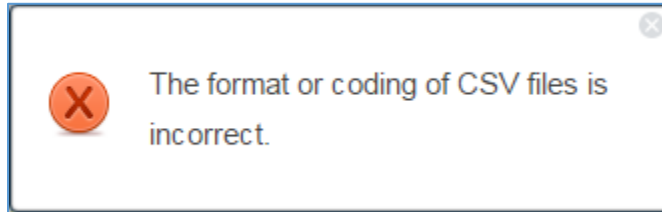

**Figure 99: Import Error**

UCM6200 will display the following message if a field is empty or contain wrong data. The following figure shows the error displayed when the auto record field is empty.

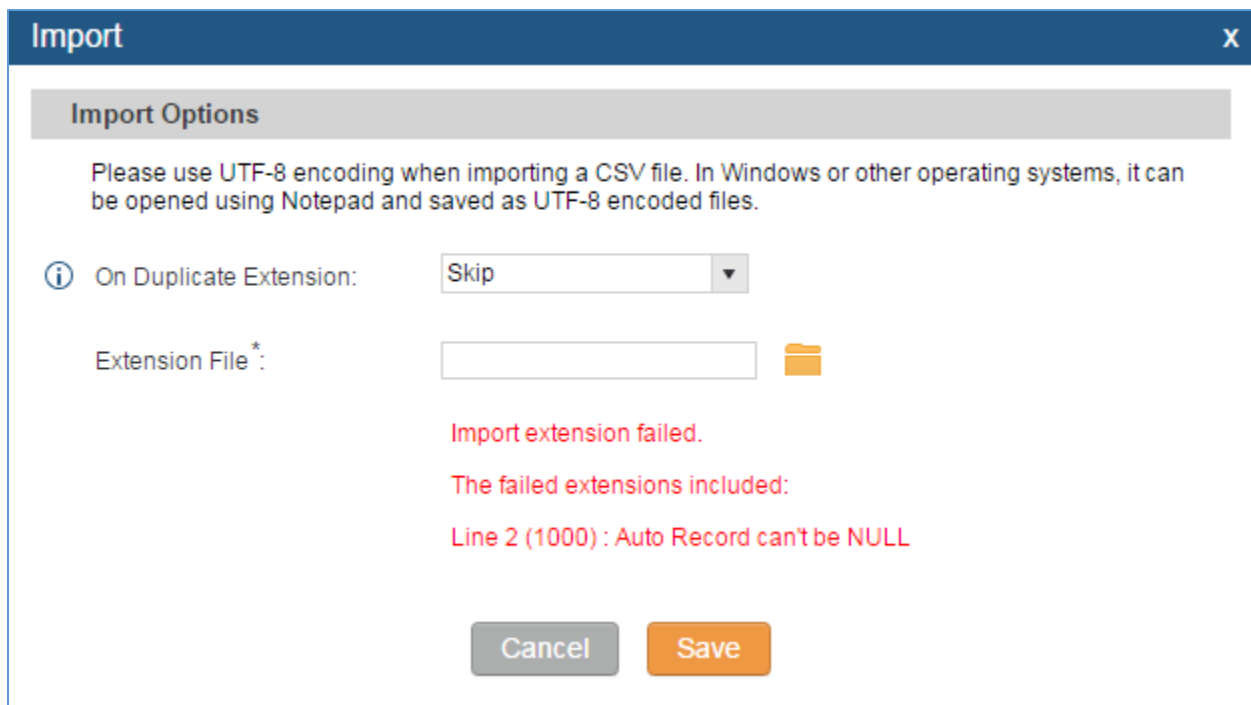


**Figure 100: Auto Record Empty**

## Email to User

Once the extensions are created with Email addresses, the PBX administrator can click on button “Email To User” to send the account registration and configuration information to the user. Please make sure Email setting under web UI->**Settings->Email Settings** is properly configured and tested on the UCM6200 before using “Email To User”.


When click on “Email To User” button, the following message will be prompted in the web page. Click on OK to confirm sending the account information to all users’ Email addresses.



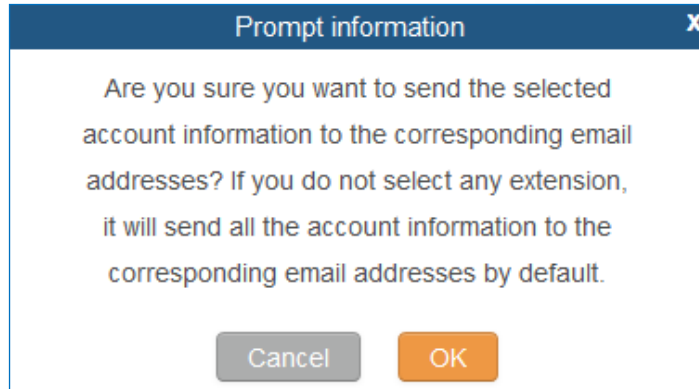

**Figure 101: Email To User - Prompt Information**

The user will receive Email including account registration information and LDAP configuration. A QR code is also generated for Mobile applications to scan it and get automatically provisioned. QR code provisioning is supported on Grandstream Softphone GS Wave Android™ application and iOS application.

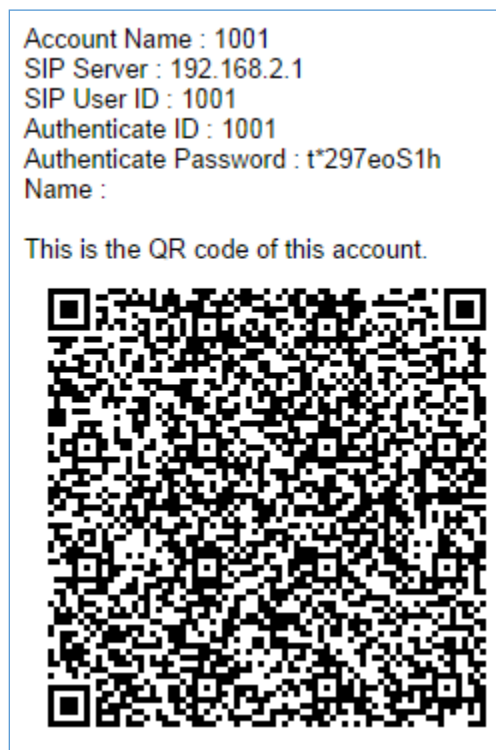

**Figure 102: Account Registration Information and QR Code**



Server Address : 192.168.2.1  
Port : 389  
Base : dc=pbx,dc=com  
This is the QR code of this LDAP config.



Figure 103: LDAP Client Information and QR Code





## Multiple Registrations Per Extension

UCM6200 supports multiple registrations per extension so that users can use the same extension on devices in different locations.

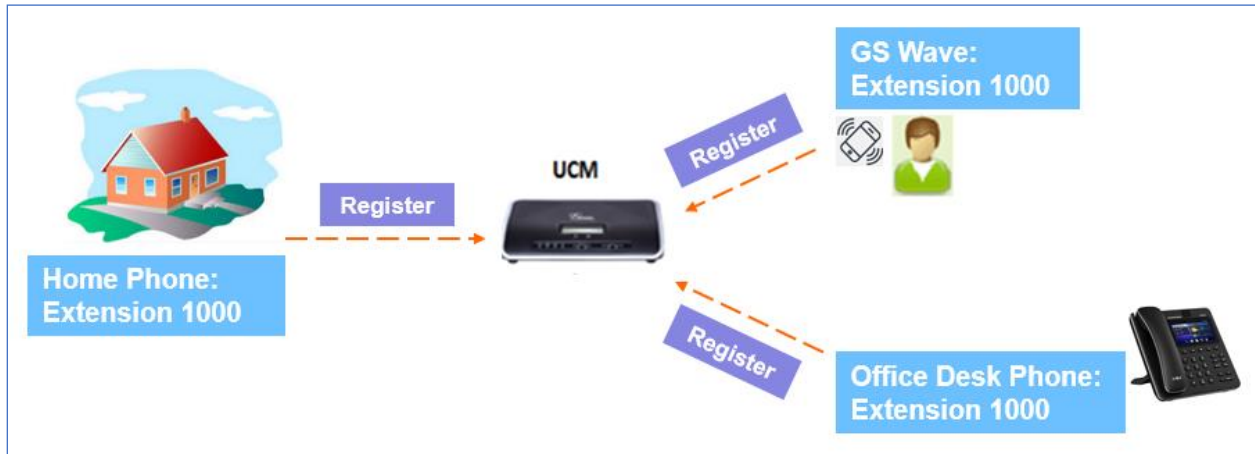


Figure 104: Multiple Registrations per Extension

This feature can be enabled by configuring option “Concurrent Registrations” under web **UI->PBX->Basic/Call Routes->Edit Extension**. The default value is set to 1 for security purpose.

Edit Extension : 1000
X

Basic Settings
Media
Features
Specific Time

**General**

|  |  |
|--|--|
| <p><span>ⓘ</span> Extension*: <input type="text" value="1000"/></p> <p><span>ⓘ</span> Permission: <input type="text" value="Internal"/></p> <p><span>ⓘ</span> AuthID: <input type="text"/></p> <p><span>ⓘ</span> Voicemail Password*: <input type="text" value="••••"/></p> <p><span>ⓘ</span> Disable This Extension: <input type="checkbox"/></p> | <p><span>ⓘ</span> CallerID Number: <input type="text"/></p> <p><span>ⓘ</span> SIP/IAX Password*: <input type="password" value="••••••"/></p> <p><span>ⓘ</span> Enable Voicemail: <input checked="" type="checkbox"/></p> <p><span>ⓘ</span> Skip Voicemail Password Verification: <input checked="" type="checkbox"/></p> |
|--|--|

**User Settings**

|   |  |
|---|--|
| <p><span>ⓘ</span> First Name: <input type="text"/></p> <p><span>ⓘ</span> Email Address: <input type="text"/></p> <p><span>ⓘ</span> Language: <input type="text" value="Default"/></p> | <p><span>ⓘ</span> Last Name: <input type="text"/></p> <p><span>ⓘ</span> User Password*: <input type="password" value="••••••"/></p> <p><span>ⓘ</span> <span style="border: 2px solid red; padding: 2px;">Concurrent Registrations:</span> <input type="text" value="1"/></p> |
|---|--|

Figure 105: Extension - Concurrent Registration



## SMS message support

The UCM6200 provides built-in SIP SMS message support. For SIP end devices such as Grandstream GXP or GXV phones that supports SIP message, after an UCM6200 account is registered on the end device, the user can send and receive SMS message. Please refer to the end device documentation on how to send and receive SMS message.

SMS Message support is a new feature added since firmware 1.0.10.x.





Figure 106: SMS Message Support



# TRUNKS

## Analog Trunks

Go to Web GUI->**PBX->Basic/Call Routes->Analog Trunks** to add and edit analog trunks.

- Click on "Create New Analog Trunk" to add a new analog trunk.
- Click on  to edit the analog trunk.
- Click on  to delete the analog trunk.

## Analog Trunk Configuration

The analog trunk options are listed in the table below.

**Table 51: Analog Trunk Configuration Parameters**

|                                 |   |
|---------------------------------|---|
| <b>Channels</b>                 | Select the channel for the analog trunk. <ul style="list-style-type: none"> <li>• UCM6202: 2 channels</li> <li>• UCM6204: 4 channels</li> <li>• UCM6208: 8 channels</li> </ul>  |
| <b>Trunk Name</b>               | Specify a unique label to identify the trunk when listed in outbound rules, incoming rules and etc.   |
| <b>SLA Mode</b>                 | Enable this option to satisfy two primary use cases, which include emulating a simple key system and creating shared extensions on a PBX. Enable SLA Mode will disable polarity reversal.   |
| <b>Barge Allowed</b>            | The barge option specifies whether or not other stations are allowed to join a call in progress on this trunk. If enabled, the other stations can press the line button to join the call.<br>The default setting is Yes.  |
| <b>Hold Access</b>              | The hold option specifies hold permissions for this trunk. If set to "Open", any station can place this trunk on hold and any other station is allowed to retrieve the call. If set to "Private", only the station that places the call on hold can retrieve the call.<br>The default setting is Yes.                 |
| <b>Advanced Options</b>         |   |
| <b>Enable Polarity Reversal</b> | If enabled, a polarity reversal will be marked as received when an outgoing call is answered by the remote party. For some countries, a polarity reversal is used for signaling the disconnection of a phone line and the call will be considered as "hangup" on a polarity reversal.<br>The default setting is "No". |



|  |   |
|--|---|
| <b>Polarity on Answer Delay</b>          | When FXO port answers the call, FXS may send a Polarity Reversal. If this interval is shorter than the value of "Polarity on Answer Delay", the Polarity Reversal will be ignored. Otherwise, the FXO will onhook to disconnect the call. The default setting is 600ms.   |
| <b>Current Disconnect Threshold (ms)</b> | This is the periodic time (in ms) that the UCM6200 will use to check on a voltage drop in the line. The default setting is 200. The valid range is 50 to 3000.  |
| <b>Ring Timeout</b>                      | Configure the ring timeout (in ms). Trunk (FXO) devices must have a timeout to determine if there was a hangup before the line is answered. This value can be used to configure how long it takes before the UCM6200 considers a non-ringing line with hangup activity. The default setting is 8000.  |
| <b>RX Gain</b>                           | Configure the RX gain for the receiving channel of analog FXO port. The valid range is from -13.5 (dB) to + 12.0 (dB). The default setting is 0.  |
| <b>TX Gain</b>                           | Configure the TX gain for the transmitting channel of analog FXO port. The valid range is from -13.5 (dB) to + 12.0 (dB). The default setting is 0.   |
| <b>Use CallerID</b>                      | Configure to enable CallerID detection. The default setting is "Yes".   |
| <b>Caller ID Scheme</b>                  | Select the Caller ID scheme for this trunk. The default setting is "Bellcore/Telcordia".  |
| <b>FXO Dial Delay(ms)</b>                | Configure the time interval between off-hook and first dialed digit for outbound calls.   |
| <b>Auto Record</b>                       | Enable automatic recording for the calls using this trunk. The default setting is disabled. The recording files can be accessed under web GUI-> <b>CDR-&gt;Recording Files</b> .  |
| <b>Disable This Trunk</b>                | If selected, the trunk will be disabled.  |
| <b>DAHDI Out Line Selection</b>          | <p>This is to implement analog trunk outbound line selection strategy. Three options are available:</p> <ul style="list-style-type: none"> <li>• Ascend<br/>When the call goes out from this analog trunk, it will always try to use the first idle FXO port. The port order that the call will use to go out would be port 1-&gt;port 2-&gt;port 10-&gt;port 16. Every time it will start with port 1 (if it's idle).</li> <li>• Poll<br/>When the call goes out from this analog trunk, it will use the port that is not used last time. And it will always use the port in the order of port 1-&gt;2-&gt;10-&gt;16-&gt;1-&gt;2-&gt;10-&gt;16-&gt;1-&gt;2-&gt;10-&gt;16..., following the last port being used.</li> <li>• Descend<br/>When the call goes out from this analog trunk, it will always try to use the last idle FXO port. The port order that the call will use to go out would be port 16-&gt;port 10-&gt;port 2-&gt;port 1. Every time it will start with port 16 (if it's idle).</li> </ul> <p>The default setting is "Ascend" mode.</p> |




| Tone Settings               |   |
|-----------------------------|---|
| <b>Busy Detection</b>       | Busy Detection is used to detect far end hangup or for detecting busy signal. The default setting is "Yes".   |
| <b>Busy Tone Count</b>      | If "Busy Detection" is enabled, users can specify the number of busy tones to be played before hanging up. The default setting is 2. Better results might be achieved if set to 4, 6 or even 8. Please note that the higher the number is, the more time is needed to hangup the channel. However, this might lower the probability to get random hangup.   |
| <b>Congestion Detection</b> | Congestion detection is used to detect far end congestion signal. The default setting is "Yes".   |
| <b>Congestion Count</b>     | If "Congestion Detection" is enabled, users can specify the number of congestion tones to wait for. The default setting is 2.   |
| <b>Tone Country</b>         | Select the country for tone settings. If "Custom" is selected, users could manually configure the values for Busy Tone and Congestion Tone. The default setting is "United States of America (USA)".  |
| <b>Busy Tone</b>            | <p><b>Syntax:</b><br/> <code>f1=val[@level],[f2=val[@level],c=on1/off1[-on2/off2[-on3/off3]]];</code><br/>           Frequencies are in Hz and cadence on and off are in ms.<br/>           Frequencies Range: [0, 4000)<br/>           Busy Level Range: (-300, 0)<br/>           Cadence Range: [0, 16383].<br/>           Select Tone Country "Custom" to manually configure Busy Tone value.</p> <p><b>Default value:</b><br/> <code>f1=480@-50,f2=620@-50,c=500/500</code></p> |
| <b>Congestion Tone</b>      | <p><b>Syntax:</b><br/> <code>f1=val[@level],[f2=val[@level],c=on1/off1[-on2/off2[-on3/off3]]];</code><br/>           Frequencies are in Hz and cadence on and off are in ms.<br/>           Frequencies Range: [0, 4000)<br/>           Busy Level Range: (-300, 0)<br/>           Cadence Range: [0, 16383].<br/>           Select Tone Country "Custom" to manually configure Busy Tone value.</p> <p><b>Default value:</b><br/> <code>f1=480@-50,f2=620@-50,c=250/250</code></p> |
| <b>PSTN Detection</b>       | Click on "Detect" to detect the busy tone, Polarity Reversal and Current Disconnect by PSTN. Before the detecting, please make sure there are more than one channel configured and working properly. If the detection has busy tone, the "Tone Country" option will be set as "Custom".   |



## PSTN Detection

The UCM6200 provides PSTN detection function to help users detect the busy tone, Polarity Reversal and Current Disconnect by making a call from the PSTN line to another destination. The detecting call will be answered and up for about 1 minute. Once done, the detecting result will show and can be used for the UCM6200 settings.

1. Go to UCM6200 web GUI->**PBX->Basic/Call Routes->Analog Trunks** page.
2. Click to edit the analog trunk created for the FXO port.
3. In the dialog window to edit the analog trunk, go to "Tone Settings" section and there are two methods to set the busy tone.
  - Tone Country. The default setting is "United States of America (USA)".
  - PSTN Detection.

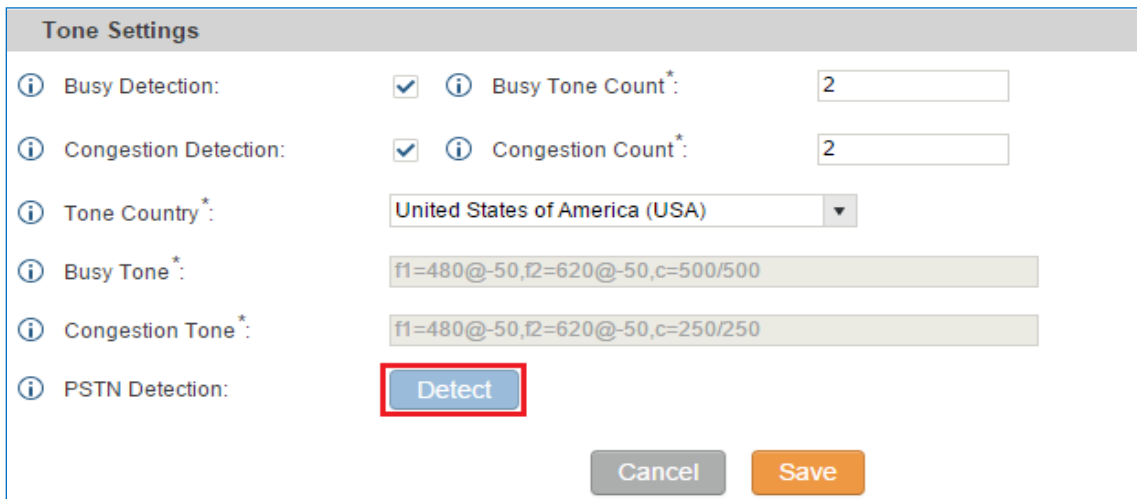

| Tone Settings  |  |
|--|--|
| <input checked="" type="checkbox"/> Busy Detection:                            | <input type="text" value="2"/> Busy Tone Count*  |
| <input checked="" type="checkbox"/> Congestion Detection:                      | <input type="text" value="2"/> Congestion Count* |
| <input type="text" value="United States of America (USA)"/> Tone Country*:     |  |
| <input type="text" value="f1=480@-50,f2=620@-50,c=500/500"/> Busy Tone*:       |  |
| <input type="text" value="f1=480@-50,f2=620@-50,c=250/250"/> Congestion Tone*: |  |
| <input type="button" value="Detect"/> PSTN Detection:                          |  |
| <input type="button" value="Cancel"/> <input type="button" value="Save"/>      |  |

Figure 107: UCM6200 FXO Tone Settings

4. Click on "Detect" to start PSTN detection.





**Edit Analog Trunk: trunk\_1** [X]

ⓘ Detect model:

ⓘ Source Channel (to be detected):

ⓘ Destination Channel:

ⓘ Destination Number:

Note: Detection will keep the call up for about 1 minute. If you have selected Semi-auto Detect, please pick up the phone only after you are informed.

**Figure 108: UCM6200 PSTN Detection**


- If there are two FXO ports connected to PSTN lines, use the following settings for auto-detection.

**Detect Model:** Auto Detect.

**Source Channel:** The source channel to be detected.

**Destination Channel:** The channel to help detecting. For example, the second FXO port.

**Destination Number:** The number to be dialed for detecting. This number must be the actual PSTN number for the FXO port used as the destination channel.

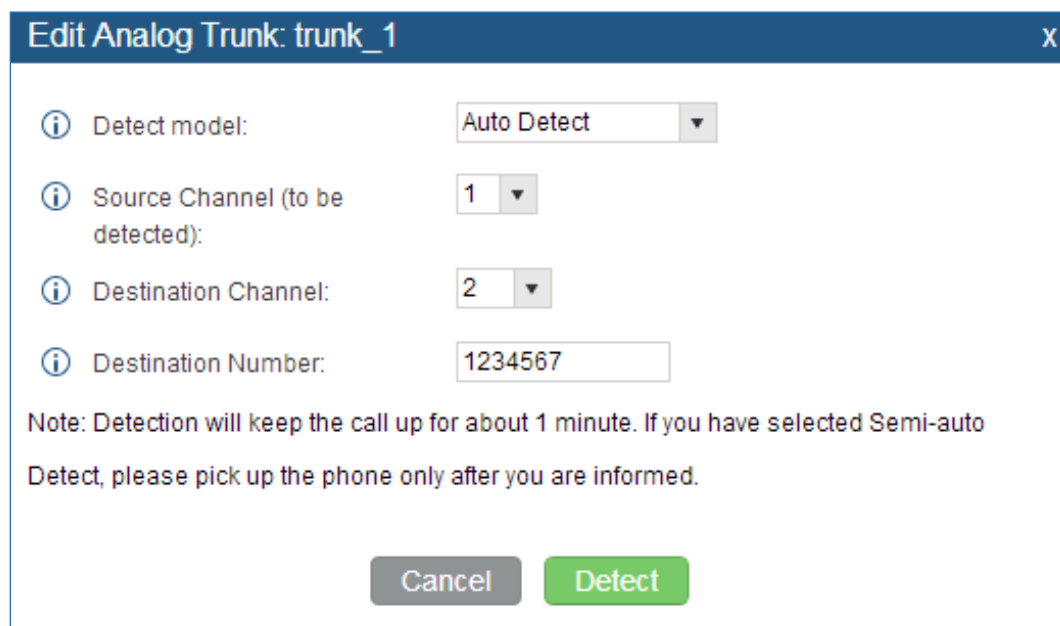

**Edit Analog Trunk: trunk\_1** [X]

ⓘ Detect model:

ⓘ Source Channel (to be detected):

ⓘ Destination Channel:


ⓘ Destination Number:

Note: Detection will keep the call up for about 1 minute. If you have selected Semi-auto Detect, please pick up the phone only after you are informed.

**Figure 109: UCM6200 PSTN Detection: Auto Detect**



- If there is only one FXO port connected to PSTN line, use the following settings for auto-detection.

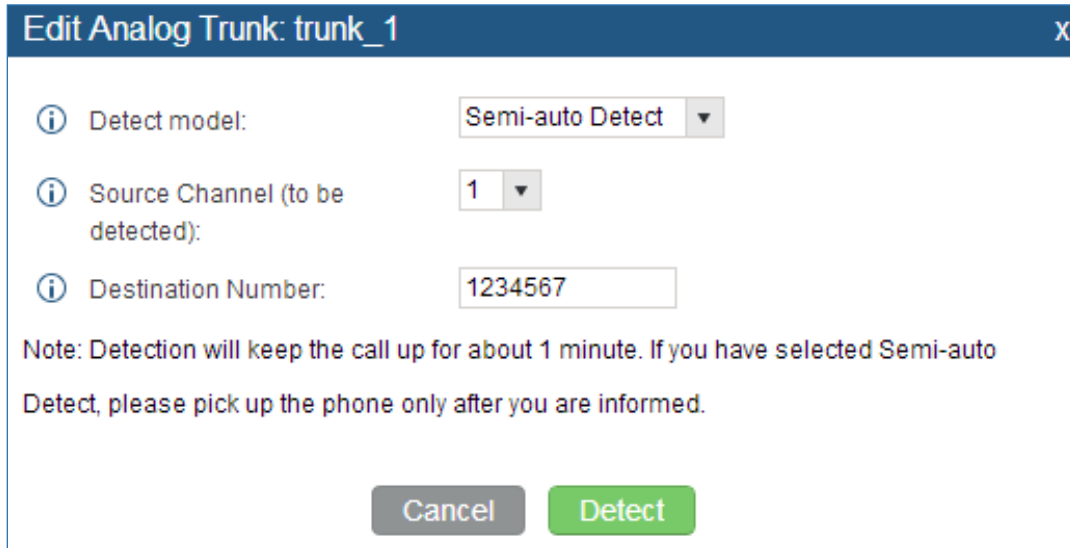

**Figure 110: UCM6200 PSTN Detection: Semi-Auto Detect**

**Detect Model:** Semi-auto Detect.

**Source Channel:** The source channel to be detected.

**Destination Number:** The number to be dialed for detecting. This number could be a cell phone number or other PSTN number that can be reached from the source channel PSTN number.

5. Click "Detect" to start detecting. The source channel will initiate a call to the destination number. For "Auto Detect", the call will be automatically answered. For "Semi-auto Detect", the UCM6200 web GUI will display prompt to notify the user to answer or hang up the call to finish the detecting process.
6. Once done, the detected result will show. Users could save the detecting result as the current UCM6200 settings.

**Table 52: PSTN Detection for Analog Trunk**

|                            |   |
|----------------------------|---|
| <p><b>Detect Model</b></p> | <p>Select "Auto Detect" or "Semi-auto Detect" for PSTN detection.</p> <ul style="list-style-type: none"> <li>• Auto Detect<br/>Please make sure two or more channels are connected to the UCM6200 and in idle status before starting the detection. During the detection, one channel will be used as caller (Source Channel) and another channel will be used as callee (Destination Channel). The UCM6200 will control the call to be established and hang up between caller and callee to finish the detection.</li> <li>• Semi-auto Detect<br/>Semi-auto detection requires answering or hanging up the call</li> </ul> |
|----------------------------|---|





|                            |   |
|----------------------------|---|
|                            | <p>manually. Please make sure one channel is connected to the UCM6200 and in idle status before starting the detection. During the detection, source channel will be used as caller and send the call to the configured Destination Number. Users will then need follow the prompts in web GUI to help finish the detection.</p> <p>The default setting is "Auto Detect".</p> |
| <b>Source Channel</b>      | Select the channel to be detected.  |
| <b>Destination Channel</b> | Select the channel to help detect when "Auto Detect" is used.   |
| <b>Destination Number</b>  | Configure the number to be called to help the detection.  |





---

 **Note:**

- The PSTN detection process will keep the call up for about 1 minute.
  - If "Semi-auto Detect" is used, please pick up the call only after informed from the web GUI prompt.
  - Once the detection is successful, the detected parameters "Busy Tone", "Polarity Reversal" and "Current Disconnect by PSTN" will be filled into the corresponding fields in the analog trunk configuration.
- 

## VOIP Trunks

VoIP trunks can be configured in UCM6200 under Web GUI->**PBX->Basic/Call Routes->VoIP Trunks**. Once created, the VoIP trunks will be listed with Provider Name, Type, Hostname/IP, Username and Options to edit/detect the trunk.

- Click on "Create New SIP Trunk" or "Create New IAX Trunk" to add a new VoIP trunk.
- Click on  to configure detailed parameters for the VoIP trunk.
- Click on  to configure Direct Outward Dialing (DOD) for the SIP Trunk.
- Click on  to start LDAP Sync.
- Click on  to delete the VoIP trunk.

For VoIP trunk example, please refer to the document in the following link:

[http://www.grandstream.com/sites/default/files/Resources/ucm\\_to\\_ucm\\_peer\\_guide.pdf](http://www.grandstream.com/sites/default/files/Resources/ucm_to_ucm_peer_guide.pdf)



The VoIP trunk options are listed in the table below.

**Table 53: Create New SIP Trunk**

|                           |  |
|---------------------------|--|
| <b>Type</b>               | Select the VoIP trunk type. <ul style="list-style-type: none"> <li>• Peer SIP Trunk</li> <li>• Register SIP Trunk</li> </ul>   |
| <b>Provider Name</b>      | Configure a unique label to identify this trunk when listed in outbound rules, inbound rules and etc.  |
| <b>Host Name</b>          | Configure the IP address or URL for the VoIP provider's server of the trunk.   |
| <b>Keep Original CID</b>  | Keep the CID from the inbound call when dialing out. This setting will override "Keep Trunk CID" option. Please make sure that the peer PBX at the other side supports to match user entry using "username" field from authentication line.  |
| <b>Keep Trunk CID</b>     | If enabled, the trunk CID will not be overridden by extension's CID when the extension has CID configured. The default setting is "No".  |
| <b>NAT</b>                | Turn on this setting when the PBX is using public IP and communicating with devices behind NAT. If there is one-way audio issue, usually it is related to NAT configuration or SIP/RTP port support on the firewall.   |
| <b>Disable This Trunk</b> | If checked, the trunk will be disabled.<br><b>Note:</b><br>If a current SIP trunk is disabled, UCM will send UNREGISTER message (REGISTER message with expires=0) to the SIP provider.   |
| <b>TEL URI</b>            | If the trunk has an assigned PSTN telephone number, this field should be set to "User=Phone". Then a "User=Phone" parameter will be attached to the Request-Line and TO header in the SIP request to indicate the E.164 number. If set to "Enable", "Tel:" will be used instead of "SIP:" in the SIP request. The default setting is disabled.   |
| <b>Caller ID</b>          | Configure the Caller ID. This is the number that the trunk will try to use when making outbound calls. For some providers, it might not be possible to set the CallerID with this option and this option will be ignored.<br>When making outgoing calls, the following rules are used to determine which CallerID will be used if they exist: <ul style="list-style-type: none"> <li>• The CallerID configured for the extension will be looked up first.</li> <li>• If no CallerID is configured for the extension, the CallerID configured for the trunk will be used.</li> <li>• If the above two are missing, the "Global Outbound CID" defined in Web GUI-&gt;PBX-&gt;Internal Options-&gt;General will be used.</li> </ul> |
| <b>Need Registration</b>  | Select whether the trunk needs to register on the external server or not when "Register SIP Trunk" type is selected. The default setting is No.  |



|                    |   |
|--------------------|---|
| <b>Username</b>    | Enter the username to register to the trunk from the provider when "Register SIP Trunk" type is selected.   |
| <b>Password</b>    | Enter the password to register to the trunk from the provider when "Register SIP Trunk" is selected.  |
| <b>Auth ID</b>     | Enter the Authentication ID for "Register SIP Trunk" type.  |
| <b>Auto Record</b> | Enable automatic recording for the calls using this trunk (for SIP trunk only). The default setting is disabled. The recording files can be accessed under web GUI->CDR->Recording Files. |

**Table 54: SIP Register Trunk Configuration Parameters**

| Basic Settings            |  |
|---------------------------|--|
| <b>Provider Name</b>      | Configure a unique label to identify this trunk when listed in outbound rules, inbound rules and etc.  |
| <b>Host Name</b>          | Configure the IP address or URL for the VoIP provider's server of the trunk.   |
| <b>Transport</b>          | <p>Configure the SIP transport protocol to be used in this trunk. The default setting is "All - UDP Primary".</p> <ul style="list-style-type: none"> <li>• UDP Only</li> <li>• TCP Only</li> <li>• TLS Only</li> <li>• All - UDP Primary: UDP is the primary transport protocol when all the other SIP transport methods are available too.</li> <li>• All - TCP Primary: TCP is the primary transport protocol when all the other SIP transport methods are available too.</li> <li>• All - TLS Primary: TLS is the primary transport protocol when all the other SIP transport methods are available too.</li> </ul> |
| <b>Keep Original CID</b>  | Keep the CID from the inbound call when dialing out. This setting will override "Keep Trunk CID" option. Please make sure that the peer PBX at the other side supports to match user entry using "username" field from authentication line.  |
| <b>Keep Trunk CID</b>     | If enabled, the trunk CID will not be overridden by extension's CID when the extension has CID configured. The default setting is "No".  |
| <b>NAT</b>                | Turn on this option when the PBX is using public IP and communicating with devices behind NAT. If there is one-way audio issue, usually it's related to NAT configuration or SIP/RTP port configuration on the firewall.   |
| <b>Disable This Trunk</b> | <p>If selected, the trunk will be disabled.</p> <p><b>Note:</b><br/>If a current SIP trunk is disabled, UCM will send UNREGISTER message (REGISTER message with expires=0) to the SIP provider.</p>  |
| <b>TEL URI</b>            | If the trunk has an assigned PSTN telephone number, this field should be set to "User=Phone". Then a "User=Phone" parameter will be attached to the Request-   |



|   |  |
|---|--|
|   | Line and TO header in the SIP request to indicate the E.164 number. If set to "Enable", "Tel:" will be used instead of "SIP:" in the SIP request. The default setting is disabled.   |
| <b>Need Registration</b>                            | Select whether the trunk needs to register on the external server or not when "Register SIP Trunk" type is selected. The default setting is No.  |
| <b>Allow outgoing calls if registration failure</b> | If enabled outgoing calls even if the registration to this trunk fail will still be able to go through.<br>Note that if we uncheck "Need Registration" option, this option will be ignored.  |
| <b>CallerID Name</b>                                | Configure the new name of the caller when the extension has no CallerID Name configured.   |
| <b>From Domain</b>                                  | Configure the actual domain name where the extension comes from. This can be used to override the "From" Header.<br>For example, "trunk.UCM6200.provider.com" is the From Domain in From Header: sip:1234567@trunk.UCM6200.provider.com.   |
| <b>From User</b>                                    | Configure the actual user name of the extension. This can be used to override the "From" Header. There are cases where there is a single ID for registration (single trunk) with multiple DIDs.<br>For example, "1234567" is the From User in From Header: sip:1234567@trunk.UCM6200.provider.com.             |
| <b>Username</b>                                     | Enter the username to register to the trunk from the provider when "Register SIP Trunk" type is selected.  |
| <b>Password</b>                                     | Enter the password to register to the trunk from the provider when "Register SIP Trunk" is selected.   |
| <b>Auth ID</b>                                      | Enter the Authentication ID for "Register SIP Trunk" type.   |
| <b>Auth Trunk</b>                                   | If enabled, the UCM will send 401 response to the incoming call to authenticate the trunk.   |
| <b>Auto Record</b>                                  | Enable automatic recording for the calls using this trunk (for SIP trunk only). The default setting is disabled. The recording files can be accessed under web GUI->CDR->Recording Files.  |
| <b>Advanced Settings</b>                            |  |
| <b>Codec Preference</b>                             | Select audio and video codec for the VoIP trunk. The available codecs are: PCMU, PCMA, GSM, AAL2-G.726-32, G.726, G.722, G.729, G.723, iLBC, ADPCM, H.264, H.263, H.263p and VP8.  |
| <b>Send PPI Header</b>                              | If enabled, the SIP INVITE message sent to the trunk will contain PPI (P-Preferred-Identity) header. The default setting is "No".<br><b>Note:</b><br>"Send PPI Header" and "Send PAI Header" cannot be enabled at the same time. Only one of the two headers is allowed to be contained in SIP INVITE message. |



|                                   |   |
|-----------------------------------|---|
| <b>Use DOD in PPI</b>             | <p>If enabled, the SIP INVITE message sent to the trunk will contain PAI (P-Asserted-Identity) header.</p> <p>The PPI header will include the configured DOD for this extension.</p> <p><b>Note:</b> “Send PPI Header” needs to be enabled in order to use this feature.</p>  |
| <b>Send PAI Header</b>            | <p>If enabled, the SIP INVITE message sent to the trunk will contain PAI (P-Asserted-Identity) header including configured PAI Header. The default setting is “No”.</p> <p><b>Note:</b></p> <p>“Send PPI Header” and “Send PAI Header” cannot be enabled at the same time. Only one of the two headers is allowed to be contained in the SIP INVITE message.</p>  |
| <b>PAI Header</b>                 | <p>If “Send PAI Header” is enabled and “PAI Header” is configured as “123456” for instance, the PAI header in the SIP message sent from the UCM will contain “123456”. If “Send PAI Header” is enabled and “PAI Header” is configured as “empty”, the PAI header in the SIP message sent from the UCM will contain the original CID.</p> <p><b>Note:</b> “Send PAI Header” needs to be enabled in order to use this feature</p>   |
| <b>Outbound Proxy Support</b>     | <p>Select to enable outbound proxy in this trunk. The default setting is "No".</p>  |
| <b>Outbound Proxy</b>             | <p>When outbound proxy support is enabled, enter the IP address or URL of the outbound proxy.</p>   |
| <b>Remove OBP from Route</b>      | <p>It is used to set if the phone system will remove outbound proxy URI from the route header. If is set to “Yes”, it will remove the route header from SIP requests. The default setting is “No”.</p>  |
| <b>DID Mode</b>                   | <p>Configure where to get the destination ID of an incoming SIP call, from SIP Request-line or To-header. The default is set to "Request-line".</p>   |
| <b>DTMF Mode</b>                  | <p>Configure the default DTMF mode when sending DTMF on this trunk.</p> <ul style="list-style-type: none"> <li>• Default: The global setting of DTMF mode will be used. The global setting for DTMF Mode setting is under web UI-&gt;<b>PBX-&gt;SIP Settings-&gt;ToS</b>.</li> <li>• RFC2833: Send DTMF using RFC2833.</li> <li>• Info: Send DTMF using SIP INFO message.</li> <li>• Inband: Send DTMF using inband audio. This requires 64 bit codec, i.e., PCMU and PCMA.</li> <li>• Auto: Send DTMF using RFC2833 if offered. Otherwise, inband will be used.</li> </ul> |
| <b>Enable Heartbeat Detection</b> | <p>If enabled, the UCM6200 will regularly send SIP OPTIONS to the device to check if the device is still online. The default setting is "No".</p>   |
| <b>Heartbeat Frequency</b>        | <p>When "Enable Heartbeat Detection" option is set to "Yes", configure the interval (in seconds) of the SIP OPTIONS message sent to the device to check if the device is still online. The default setting is 60 seconds.</p>   |



|                                     |  |
|-------------------------------------|--|
| <b>Maximum Number of Call Lines</b> | The maximum number of concurrent calls using the trunk. The default settings 0, which means no limit.  |
| <b>Fax Mode</b>                     | Select Fax mode. The default setting is "None". <ul style="list-style-type: none"> <li>• None: Disable Fax.</li> <li>• Fax Detect: Fax signal from the user/trunk during the call can be detected and the received Fax will be sent to the Email address configured for this extension. If no Email address can be found for the user, the Fax will be sent to the default Email address configured in Fax setting page under web UI-&gt;PBX-&gt;Internal Options-&gt;Fax/T.38.</li> </ul> |
| <b>SRTP</b>                         | Enable SRTP for the VoIP trunk. The default setting is "No".   |
| <b>CC Settings</b>                  |  |
| <b>Enable CC</b>                    | If enabled, the system will automatically alert the user when a called party is available, given that a previous call to that party failed for some reason.  |
| <b>CC Max Agents</b>                | Configure the maximum number of CCSS agents which may be allocated for this channel. In other words, this number serves as the maximum number of CC requests this channel is allowed to make. The minimum value is 1.  |
| <b>CC Max Monitors</b>              | Configure the maximum number of monitor structures which may be created for this device. In other words, this number tells how many callers may request CC services for a specific device at one time. The minimum value is 1.   |

**Table 55: SIP Peer Trunk Configuration Parameters**

|                          |   |
|--------------------------|---|
| <b>Basic Settings</b>    |   |
| <b>Provider Name</b>     | Configure a unique label to identify this trunk when listed in outbound rules, inbound rules and etc.   |
| <b>Host Name</b>         | Configure the IP address or URL for the VoIP provider's server of the trunk.  |
| <b>Transport</b>         | Configure the SIP transport protocol to be used in this trunk. The default setting is "All - UDP Primary". <ul style="list-style-type: none"> <li>• UDP Only</li> <li>• TCP Only</li> <li>• TLS Only</li> <li>• All - UDP Primary: UDP is the primary transport protocol when all the other SIP transport methods are available too.</li> <li>• All - TCP Primary: TCP is the primary transport protocol when all the other SIP transport methods are available too.</li> <li>• All - TLS Primary: TLS is the primary transport protocol when all the other SIP transport methods are available too.</li> </ul> |
| <b>Keep Original CID</b> | Keep the CID from the inbound call when dialing out, this setting will override "Keep Trunk CID" option. Please make sure that the peer PBX at the other side supports to match user entry using "username" field from authentication line.   |



|                           |  |
|---------------------------|--|
| <b>Keep Trunk CID</b>     | If enabled, the trunk CID will not be overridden by extension's CID when the extension has CID configured. The default setting is "No".  |
| <b>NAT</b>                | Turn on this option when the PBX is using public IP and communicating with devices behind NAT. If there is one-way audio issue, usually it's related to NAT configuration or SIP/RTP port configuration on the firewall.   |
| <b>Disable This Trunk</b> | If selected, the trunk will be disabled. <b>Note:</b><br>If a current SIP trunk is disabled, UCM will send UNREGISTER message (REGISTER message with expires=0) to the SIP provider.   |
| <b>TEL URI</b>            | If the trunk has an assigned PSTN telephone number, this field should be set to "User=Phone". Then a "User=Phone" parameter will be attached to the Request-Line and TO header in the SIP request to indicate the E.164 number. If set to "Enable", "Tel:" will be used instead of "SIP:" in the SIP request. The default setting is disabled.   |
| <b>Caller ID</b>          | Configure the Caller ID. This is the number that the trunk will try to use when making outbound calls. For some providers, it might not be possible to set the CallerID with this option and this option will be ignored.<br>When making outgoing calls, the following rules are used to determine which CallerID will be used if they exist: <ul style="list-style-type: none"> <li>• The CallerID configured for the extension will be looked up first.</li> <li>• If no CallerID configured for the extension, the CallerID configured for the trunk will be used.</li> <li>• If the above two are missing, the "Global Outbound CID" defined in Web GUI-&gt;<b>PBX-&gt;Internal Options-&gt;General</b> will be used.</li> </ul> |
| <b>CallerID Name</b>      | Configure the name of the caller to be displayed when the extension has no CallerID Name configured.   |
| <b>Auto Record</b>        | Enable automatic recording for the calls using this trunk (for SIP trunk only). The default setting is disabled. The recording files can be accessed under web GUI-> <b>CDR-&gt;Recording Files</b> .  |
| <b>Advanced Settings</b>  |  |
| <b>Codec Preference</b>   | Select audio and video codec for the VoIP trunk. The available codecs are: PCMU, PCMA, GSM, AAL2-G.726-32, G.726, G.722, G.729, G.723, iLBC, ADPCM, H.264, H.263, H.263p and VP8.  |
| <b>DID Mode</b>           | Configure where to get the destination ID of an incoming SIP call, from SIP Request-line or To-header. The default is set to "Request-line".   |
| <b>DTMF Mode</b>          | Configure the default DTMF mode when sending DTMF on this trunk. <ul style="list-style-type: none"> <li>• Default: The global setting of DTMF mode will be used. The global setting for DTMF Mode setting is under web UI-&gt;<b>PBX-&gt;SIP Settings-&gt;ToS</b>.</li> <li>• RFC2833: Send DTMF using RFC2833.</li> <li>• Info: Send DTMF using SIP INFO message.</li> </ul>  |





|                                     |  |
|-------------------------------------|--|
|                                     | <ul style="list-style-type: none"> <li>• Inband: Send DTMF using inband audio. This requires 64 bit codec, i.e., PCMU and PCMA.</li> <li>• Auto: Send DTMF using RFC2833 if offered. Otherwise, inband will be used.</li> </ul>  |
| <b>Enable Heartbeat Detection</b>   | If enabled, the UCM6200 will regularly send SIP OPTIONS to the device to check if the device is still online. The default setting is "No".   |
| <b>Heartbeat Frequency</b>          | When "Enable Heartbeat Detection" option is set to "Yes", configure the interval (in seconds) of the SIP OPTIONS message sent to the device to check if the device is still online. The default setting is 60 seconds.   |
| <b>Maximum Number of Call Lines</b> | The maximum number of concurrent calls using the trunk. The default settings 0, which means no limit.  |
| <b>Fax Mode</b>                     | Select Fax mode. The default setting is "None". <ul style="list-style-type: none"> <li>• None: Disable Fax.</li> <li>• Fax Detect: Fax signal from the user/trunk during the call can be detected and the received Fax will be sent to the Email address configured for this extension. If no Email address can be found for the user, the Fax will be sent to the default Email address configured in Fax setting page under web UI-&gt;PBX-&gt;Internal Options-&gt;Fax/T.38.</li> </ul> |
| <b>SRTP</b>                         | Enable SRTP for the VoIP trunk. The default setting is "No".   |
| <b>Sync LDAP Enable</b>             | If enabled, the local UCM6200 will automatically provide and update the local LDAP contacts to the remote UCM6200 SIP peer trunk. In order to ensure successful synchronization, the remote UCM6200 peer also needs to enable this option on the SIP peer trunk. The default setting is "No".  |
| <b>Sync LDAP Password</b>           | This is the password used for LDAP contact file encryption and decryption during the LDAP sync process. The password must be the same on both UCM6200 peers to ensure successful synchronization.  |
| <b>Sync LDAP Port</b>               | Configure the TCP port used LDAP sync feature between two peer UCM6200.  |
| <b>LDAP Outbound Rule</b>           | Specify an outbound rule for LDAP sync feature. The UCM6200 will automatically modify the remote contacts by adding prefix parsed from this rule.  |
| <b>LDAP Dialed Prefix</b>           | Specify the prefix for LDAP sync feature. The UCM6200 will automatically modify the remote contacts by adding this prefix.   |
| <b>CC Settings</b>                  |  |
| <b>Enable CC</b>                    | If enabled, the system will automatically alert the user when a called party is available, given that a previous call to that party failed for some reason.  |
| <b>CC Max Agents</b>                | Configure the maximum number of CCSS agents which may be allocated for this channel. In other words, this number serves as the maximum number of CC requests this channel is allowed to make. The minimum value is 1.  |
| <b>CC Max Monitors</b>              | Configure the maximum number of monitor structures which may be created for this device. In other words, this number tells how many callers may request CC   |





services for a specific device at one time.  
 The minimum value is 1.

**Table 56: Create New IAX Trunk**

|                           |   |
|---------------------------|---|
| <b>Type</b>               | Select the VoIP trunk type. <ul style="list-style-type: none"> <li>Peer IAX Trunk</li> <li>Register IAX Trunk</li> </ul>                |
| <b>Provider Name</b>      | Configure a unique label to identify this trunk when listed in outbound rules, inbound rules and etc.                                   |
| <b>Host Name</b>          | Configure the IP address or URL for the VoIP provider's server of the trunk.  |
| <b>Keep Trunk CID</b>     | If enabled, the trunk CID will not be overridden by extension's CID when the extension has CID configured. The default setting is "No". |
| <b>Username</b>           | Enter the username to register to the trunk from the provider when "Register IAX Trunk" type is selected.                               |
| <b>Password</b>           | Enter the password to register to the trunk from the provider when "Register IAX Trunk" type is selected.                               |
| <b>Disable This Trunk</b> | If selected, the trunk will be disabled.  |

**Table 57: IAX Register Trunk Configuration Parameters**

| Basic Settings            |   |
|---------------------------|---|
| <b>Provider Name</b>      | Configure a unique label to identify this trunk when listed in outbound rules, inbound rules and etc.   |
| <b>Host Name</b>          | Configure the IP address or URL for the VoIP provider's server of the trunk.  |
| <b>Keep Trunk CID</b>     | If enabled, the trunk CID will not be overridden by extension's CID when the extension has CID configured. The default setting is "No".   |
| <b>Disable This Trunk</b> | If selected, the trunk will be disabled.  |
| <b>Caller ID</b>          | Configure the Caller ID. This is the number that the trunk will try to use when making outbound calls. For some providers, it might not be possible to set the CallerID with this option and this option will be ignored. When making outgoing calls, following rules are used to determine which CallerID will be used if they exist: <ul style="list-style-type: none"> <li>The CallerID configured for the extension will be looked up first.</li> <li>If no CallerID configured for the extension, the CallerID configured for the trunk will be used.</li> <li>If the above two are missing, the "Global Outbound CID" defined in Web GUI-&gt;<b>PBX</b>-&gt;<b>Internal Options</b>-&gt;<b>General</b> will be used.</li> </ul> |
| <b>CallerID Name</b>      | Configure the name of the caller to be displayed when the extension has no CallerID Name configured.  |
| <b>Username</b>           | Enter the username to register to the trunk from the provider.  |



|                                     |   |
|-------------------------------------|---|
| <b>Password</b>                     | Enter the password to register to the trunk from the provider.  |
| <b>Advanced Settings</b>            |   |
| <b>Codec Preference</b>             | Select audio and video codec for the VoIP trunk. The available codecs are: PCMU, PCMA, GSM, AAL2-G.726-32, G.726, G.722, G.729, G.723, iLBC, ADPCM, H.264, H.263, H.263p and VP8.   |
| <b>Enable Heartbeat Detection</b>   | If enabled, the UCM6200 will regularly send SIP OPTIONS to the device to check if the device is still online. The default setting is "No".  |
| <b>Heartbeat Frequency</b>          | When "Enable Heartbeat Detection" option is set to "Yes", configure the interval (in seconds) of the SIP OPTIONS message sent to the device to check if the device is still online. The default setting is 60 seconds.  |
| <b>Maximum Number of Call Lines</b> | The maximum number of concurrent calls using the trunk. The default settings 0, which means no limited.   |
| <b>Fax Mode</b>                     | <p>Select Fax mode. The default setting is "None".</p> <ul style="list-style-type: none"> <li>• None: Disable Fax.</li> <li>• Fax Detect: Fax signal from the user/trunk during the call can be detected and the received Fax will be sent to the Email address configured for this extension. If no Email address can be found for the user, the Fax will be sent to the default Email address configured in Fax setting page under web UI-&gt;PBX-&gt;Internal Options-&gt;Fax/T.38.</li> </ul> |

**Table 58: IAX Peer Trunk Configuration Parameters**

|                           |  |
|---------------------------|--|
| <b>Basic Settings</b>     |  |
| <b>Provider Name</b>      | Configure a unique label to identify this trunk when listed in outbound rules, inbound rules and etc.  |
| <b>Host Name</b>          | Configure the IP address or URL for the VoIP provider's server of the trunk.   |
| <b>Keep Trunk CID</b>     | If enabled, the trunk CID will not be overridden by extension's CID when the extension has CID configured. The default setting is "No".  |
| <b>Disable This Trunk</b> | If selected, the trunk will be disabled.   |
| <b>Caller ID</b>          | <p>Configure the Caller ID. This is the number that the trunk will try to use when making outbound calls. For some providers, it might not be possible to set the CallerID with this option and this option will be ignored.</p> <p>When making outgoing calls, the following rules are used to determine which CallerID will be used if they exist:</p> <ul style="list-style-type: none"> <li>• The CallerID configured for the extension will be looked up first.</li> <li>• If no CallerID configured for the extension, the CallerID configured for the trunk will be used.</li> <li>• If the above two are missing, the "Global Outbound CID" defined in Web GUI-&gt;PBX-&gt;Internal Options-&gt;General will be used.</li> </ul> |
| <b>CallerID Name</b>      | Configure the name of the caller to be displayed when the extension has no   |



|                                     |   |
|-------------------------------------|---|
|                                     | CallerID Name configured.   |
| <b>Advanced Settings</b>            |   |
| <b>Codec Preference</b>             | Select audio and video codec for the VoIP trunk. The available codecs are: PCMU, PCMA, GSM, AAL2-G.726-32, G.726, G.722, G.729, G.723, iLBC, ADPCM, H.264, H.263, H.263p and VP8.   |
| <b>Enable Heartbeat Detection</b>   | If enabled, the UCM6200 will regularly send SIP OPTIONS to the device to check if the device is still online. The default setting is "No".  |
| <b>Heartbeat Frequency</b>          | When "Enable Heartbeat Detection" option is set to "Yes", configure the interval (in seconds) of the SIP OPTIONS message sent to the device to check if the device is still online. The default setting is 60 seconds.  |
| <b>Maximum Number of Call Lines</b> | The maximum number of concurrent calls using the trunk. The default settings 0, which means no limited.   |
| <b>Fax Mode</b>                     | <p>Select Fax mode. The default setting is "None".</p> <ul style="list-style-type: none"> <li>• None: Disable Fax.</li> <li>• Fax Detect: Fax signal from the user/trunk during the call can be detected and the received Fax will be sent to the Email address configured for this extension. If no Email address can be found for the user, the Fax will be sent to the default Email address configured in Fax setting page under web UI-&gt;PBX-&gt;Internal Options-&gt;Fax/T.38.</li> </ul> |


## Direct Outward Dialing (DOD)

The UCM6200 provides Direct Outward Dialing (DOD) which is a service of a local phone company (or local exchange carrier) that allows subscribers within a company's PBX system to connect to outside lines directly.


### Example of how DOD is used:


Company ABC has a SIP trunk. This SIP trunk has 4 DIDs associated to it. The main number of the office is routed to an auto attendant. The other three numbers are direct lines to specific users of the company. At the moment when a user makes an outbound call their caller ID shows up as the main office number. This poses a problem as the CEO would like their calls to come from their direct line. This can be accomplished by configuring DOD for the CEO's extension.

### Steps on how to configure DOD on the UCM6200:

1. To setup DOD go to UCM6200 web GUI->**PBX->Basic/Call Routes->VoIP Trunks** page.
2. Click  to access the DOD options for the selected SIP Trunk.
3. Click "Create a new DOD" to begin your DOD setup



4. For "DOD Number" enter one of the numbers (DIDs) from your SIP trunk provider. In the example above Company ABC received 4 DIDs from their provider. ABC will enter in the number for the CEO's direct line.
5. If extension number need to be appended to the DID number click on "Add Extension".
6. Select an extension from the "Available Extensions" list. Users have the option of selecting more than one extension. In this case, Company ABC would select the CEO's extension. After making the selection, click on the  button to move the extension(s) to the "Selected Extensions" list.

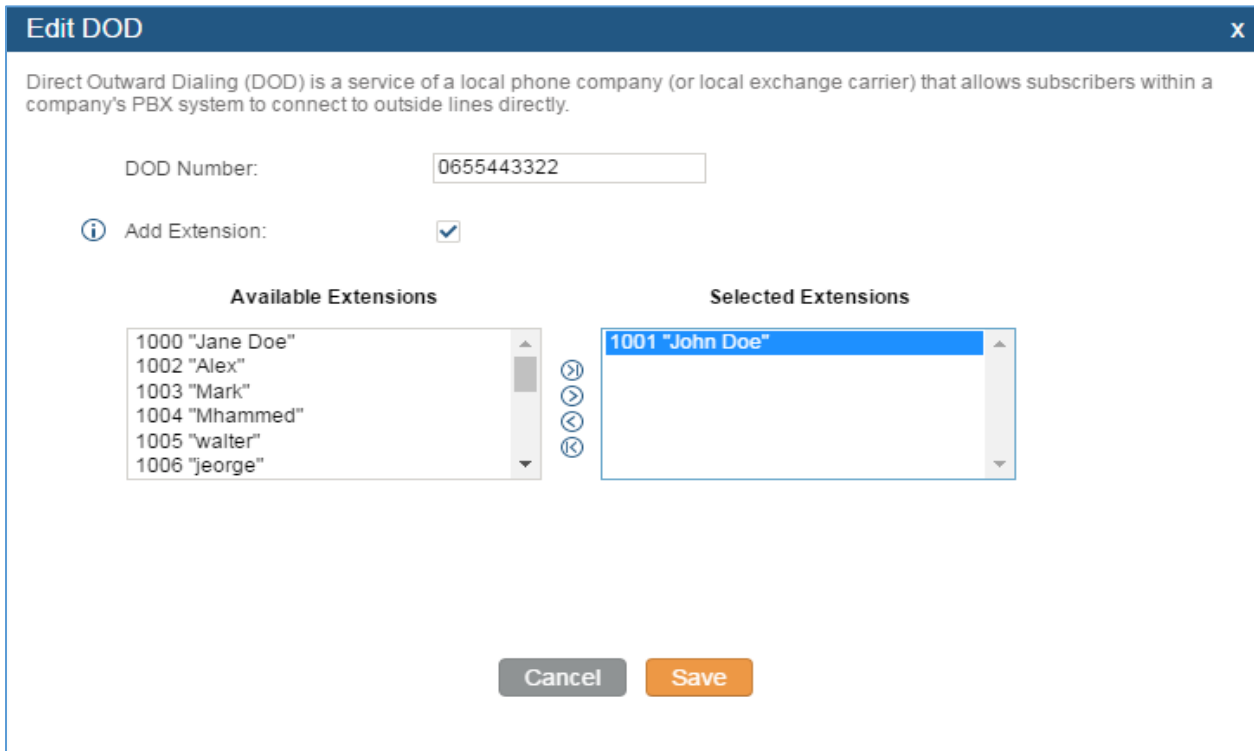

**Figure 111: DOD extension selection**

7. Click "Save" at the bottom.  
Once completed, the user will return to the EDIT DOD page that shows all the extensions that are associated to a particular DOD.



**Edit DOD** X

Direct Outward Dialing (DOD) is a service of a local phone company (or local exchange carrier) that allows subscribers within a company's PBX system to connect to outside lines directly.

Create a new DOD
Edit DOD

| DOD <span style="font-size: small;">⬆</span> | Extensions | Options |
|--|------------|---------|
| 0655443311                                   | 1004       |         |
| 0655443322                                   | 1001       |         |

Total: 2 Show: 1/1 Go to:  Go

First
Prev
Next
Last

Figure 112: Edit DOD



## SLA STATION

The UCM6200 supports SLA that allows mapping the key with LED on a multi-line phone to different external lines. When there is an incoming call and the phone starts to ring, the LED on the key will flash in red and the call can be picked up by pressing this key. This allows users to know if the line is occupied or not. The SLA function on the UCM6200 is similar to BLF but SLA is used to monitor external line i.e., analog trunk on the UCM6200. Users could configure the phone with BLF mode on the MPK to monitor the analog trunk status or press the line key pick up call from the analog trunk on the UCM6200.

### Create/Edit SLA Station

SLA Station can be configured on web GUI->**PBX->Basic/Call Routes->SLA Station**.

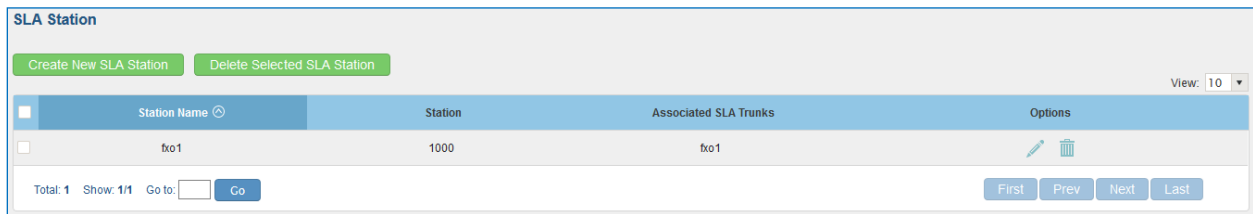


Figure 113: SLA Station






- Click on “Create New SLA Station” to add a SLA Station.
- Click on  to edit the SLA Station. The following table shows the SLA Station configuration parameters.
- Click on  to delete the SLA Station.

Table 59: SLA Station Configuration Parameters


|                             |  |
|-----------------------------|--|
| <b>Station Name</b>         | Configure a name to identify the SLA Station.  |
| <b>Station</b>              | Specify a SIP extension as a station that will be using SLA.   |
| <b>Available SLA Trunks</b> | Existing Analog Trunks with SLA Mode enabled will be listed here.  |
| <b>Selected SLA Trunks</b>  | Select a trunk for this SLA from the Available SLA Trunks list. Click on    to arrange the order. If there are multiple trunks selected, when there are calls on those trunks at the same time, pressing the LINE key on the phone will pick up the call on the first trunk here. |
| <b>SLA Station Options</b>  |  |
| <b>Ring Timeout</b>         | Configure the time (in seconds) to ring the station before the call is considered unanswered. No timeout is set by default. If set to 0, there will be no timeout.   |
| <b>Ring Delay</b>           | Configure the time (in seconds) for delay before ringing the station when a call   |



|                    |   |
|--------------------|---|
|                    | first coming in on the shared line. No delay is set by default. If set to 0, there will be no delay.  |
| <b>Hold Access</b> | This option defines the competence of the hold action for one particular trunk. If set to “open”, any station could hold a call on that trunk or resume one held session; if set to “private”, only the station that places the trunk call on hold could resume the session. The default setting is “open”. |

## Sample Configuration

1. On the UCM6200, go to web UI->**Basic/Call Routes->Analog Trunks** page. Create analog trunk or edit the existing analog trunk. Make sure “SLA Mode” is enabled for the analog trunk. Once enabled, this analog trunk will be only available for the SLA stations created under web UI->**Basic/Call Routes->SLA Station** page.

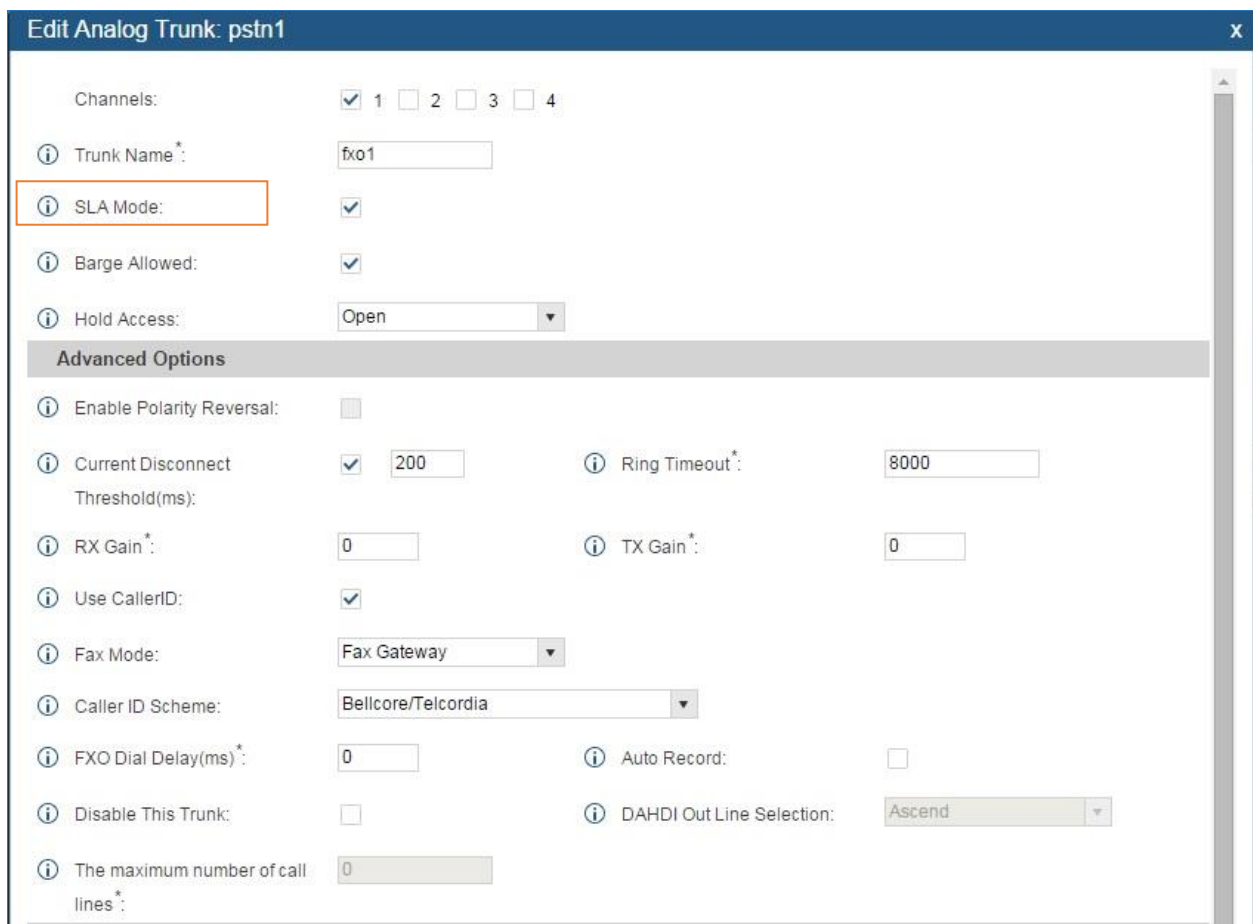

**Edit Analog Trunk: pstn1**

Channels:  1  2  3  4

Trunk Name\*: fxo1

**SLA Mode:**

Barge Allowed:

Hold Access: Open

**Advanced Options**

Enable Polarity Reversal:

Current Disconnect Threshold(ms):  200

Ring Timeout\*:

RX Gain\*:

TX Gain\*:

Use CallerID:

Fax Mode: Fax Gateway

Caller ID Scheme: Bellcore/Telcordia

FXO Dial Delay(ms)\*:

Auto Record:


Disable This Trunk:

DAHDI Out Line Selection: Ascend

The maximum number of call lines\*:

**Figure 114: Enable SLA Mode for Analog Trunk**


Click on “Save”. The analog trunk will be listed with trunk mode “SLA”.

| Trunks | Trunk Mode | Analog Ports | Options   |
|--------|------------|--------------|---|
| fxo1   | SLA        | 1            |   |

**Figure 115: Analog Trunk with SLA Mode Enabled**



- On the UCM6200, go to web UI->**Basic/Call Routes->SLA Station** page, click on “Create New SLA Station”. Please refer to section **[Create/Edit SLA Station]** for the configuration parameters. Users can create one or more SLA stations to monitor the analog trunk. The following figure shows two stations, 1002 and 1005, are configured to be associated with SLA trunk “fxo1”.

| Station Name | Station | Associated SLA Trunks | Options   |
|--------------|---------|-----------------------|---|
| sla2         | 1002    | fxo1                  |   |
| testsla      | 1005    | fxo1                  |   |

**Figure 116: SLA Example - SLA Station**

- On the SIP phone 1, configure to register UCM6200 extension 1002. Configure the MPK as BLF mode and the value must be set to “extension\_trunkname”, which is 1002\_fxo1 in this case.
- On the SIP phone 2, configure to register UCM6200 extension 1005. Configure the MPK as BLF mode and value must be set to “extension\_trunkname”, which is 1005\_fxo1 in this case.

| Mode  | Account               | Description | Value     |
|-------|-----------------------|-------------|-----------|
| MPK 1 | Busy Lamp Field (BLF) | Account 2   | 1005_fxo1 |

**Figure 117: SLA Example - MPK Configuration**

Now the SLA station is ready to use. The following functions can be achieved by this configuration.

- Making an outbound call from the station/extension, using LINE key**  
 When the extension is in idle state, pressing the line key for this extension on the phone to off hook. Then dial the station’s extension number, for example, dial 1002 on phone 1 (or dial 1005 on phone 2), to hear the dial tone. Then the users could dial external number for the outbound call.
- Making an outbound call from the station/extension, using BLF key**  
 When the extension is in idle state, pressing the MPK and users could dial external numbers directly.
- Answering call using LINE key**  
 When the station is ringing, pressing the LINE key to answer the incoming call.
- Barging-in active call using BLF key**  
 When there is an active call between an SLA station and an external number using the SLA trunk, other SLA stations monitoring the same trunk could join the call by pressing the BLF key if “Barge Allowed” is enabled for the analog trunk.
- Hold/Unhold using BLF key**  
 If the external line is previously put on hold by an SLA station, another station that monitors the same SLA trunk could unhold the call by pressing the BLF key if “Hold Access” is set to “open” on the analog trunk and the SLA station.











# CALL ROUTES

## Outbound Routes

### Outbound Routes

In the UCM6200, an outgoing calling rule pairs an extension pattern with a trunk used to dial the pattern. This allows different patterns to be dialed through different trunks (e.g., "Local" 7-digit dials through a FXO while "Long distance" 10-digit dials through a low-cost SIP trunk). Users can also set up a failover trunk to be used when the primary trunk fails.

Go to Web GUI->**PBX->Basic/Call Routes->Outbound Routes** to add and edit outbound rules.

- Click on "Create New Outbound Rule" to add a new outbound route.
- Click on  to edit the outbound route.
- Click on  to delete the outbound route.
- On the UCM6200, the outbound route priority is based on "Best matching pattern". For example, the UCM6200 has outbound route A with pattern 1xxx and outbound route B with pattern 10xx configured. When dialing 1000 for outbound call, outbound route B will always be used first. This is because pattern 10xx is a better match than pattern 1xxx. Only when there are multiple outbound routes with the same pattern configured, users can click on     to move the outbound route up/down to arrange the priority among those outbound routes.

**Note:** Under Web GUI->**PBX->Basic/Call Routes->Outbound Routes -> Country codes** section, the UCM displays a list of countries international codes and the administrator can exclude specific countries to be reached.

**Table 60: Outbound Route Configuration Parameters**

|                           |  |
|---------------------------|--|
| <b>Calling Rule Name</b>  | Configure the name of the calling rule (e.g., local, long_distance, and etc). Letters, digits, _ and - are allowed.  |
| <b>Pattern</b>            | <ul style="list-style-type: none"> <li>• All patterns are prefixed with the "_".</li> <li>• Special characters:<br/>           X: Any Digit from 0-9.<br/>           Z: Any Digit from 1-9.<br/>           N: Any Digit from 2-9.<br/>           ".": Wildcard. Match one or more characters.<br/>           "!": Wildcard. Match zero or more characters immediately.<br/>           Example: [12345-9] - Any digit from 1 to 9.</li> </ul> |
| <b>Disable This Route</b> | After creating the outbound route, users can choose to enable and disable it. If the route is disabled, it will not take effect anymore. However, the route settings will  |



|  |  |
|--|--|
|  | remain in UCM. Users can enable it again when it's needed.   |
| <b>Password</b>                          | Configure the password for users to use this rule when making outbound calls.  |
| <b>Call Duration Limit</b>               | Enable to configure the maximum duration for the call using this outbound route.   |
| <b>Maximum Call Duration</b>             | Configure the maximum duration of the call (in seconds). The default setting is 0, which means no limit.   |
| <b>Warning Time</b>                      | Configure the warning time for the call using this outbound route. If set to x seconds, the warning tone will be played to the caller when x seconds are left to end the call.   |
| <b>Warning Repeat Interval</b>           | Configure the warning repeat interval for the call using this outbound route. If set to x seconds, the warning tone will be played every x seconds after the first warning.  |
| <b>Privilege Level</b>                   | <p>Select privilege level for the outbound rule.</p> <ul style="list-style-type: none"> <li>• Internal: The lowest level required. All users can use this rule.</li> <li>• Local: Users with Local, National, or International level are allowed to use this rule.</li> <li>• National: Users with National or International level are allowed to use this rule.</li> <li>• International: The highest level required. Only users with international level can use this rule.</li> <li>• Disable: The default setting is "Disable". If selected, only the matched source caller ID will be allowed to use this outbound route.</li> </ul> <p>Please be aware of the potential security risks when using "Internal" level, which means all users can use this outbound rule to dial out from the trunk.</p>   |
| <b>Enable Filter on Source Caller ID</b> | <p>When enabled, users could specify extensions allowed to use this outbound route. "Privilege Level" is automatically disabled if using "Enable Filter on Source Caller ID".</p> <p>The following two methods can be used at the same time to define the extensions as the source caller ID.</p> <ol style="list-style-type: none"> <li>1. Select available extensions/extension groups from the left to the right. This allows users to specify arbitrary single extensions available in the PBX.</li> <li>2. Custom Dynamic Route: define the pattern for the source caller ID. This allows users to define extension range instead of selecting them one by one. <ul style="list-style-type: none"> <li>• All patterns are prefixed with the "_".</li> <li>• Special characters:<br/> X: Any Digit from 0-9.<br/> Z: Any Digit from 1-9.<br/> N: Any Digit from 2-9.<br/> ".": Wildcard. Match one or more characters.<br/> "!": Wildcard. Match zero or more characters immediately.</li> </ul> </li> </ol> |



|                                     |  |
|-------------------------------------|--|
|                                     | Example: [12345-9] - Any digit from 1 to 9.  |
| <b>Send This Call Through Trunk</b> |  |
| <b>Use Trunk</b>                    | Select the trunk for this outbound rule.   |
| <b>Strip</b>                        | <p>Allows the user to specify the number of digits that will be stripped from the beginning of the dialed string before the call is placed via the selected trunk.</p> <p>Example:<br/>The users will dial 9 as the first digit of a long distance calls. However, 9 should not be sent out via analog lines and the PSTN line. In this case, 1 digit should be stripped before the call is placed.</p>  |
| <b>Prepend</b>                      | Specify the digits to be prepended before the call is placed via the trunk. Those digits will be prepended after the dialing number is stripped.   |
| <b>Use Failover Trunk</b>           |  |
| <b>Failover Trunk</b>               | <p>Failover trunks can be used to make sure that a call goes through an alternate route, when the primary trunk is busy or down. If "Use Failover Trunk" is enabled and "Failover trunk" is defined, the calls that cannot be placed via the regular trunk may have a secondary trunk to go through.</p> <p>UCM62XX support up to 10 failover trunks.</p> <p>Example:<br/>The user's primary trunk is a VoIP trunk and the user would like to use the PSTN when the VoIP trunk is not available. The PSTN trunk can be configured as the failover trunk of the VoIP trunk.</p> |
| <b>Strip</b>                        | <p>Allows the user to specify the number of digits that will be stripped from the beginning of the dialed string before the call is placed via the selected trunk.</p> <p>Example:<br/>The users will dial 9 as the first digit of a long distance calls. However, 9 should not be sent out via analog lines and the PSTN line. In this case, 1 digit should be stripped before the call is placed.</p>  |
| <b>Prepend</b>                      | Specify the digits to be prepended before the call is placed via the trunk. Those digits will be prepended after the dialing number is stripped.   |
| <b>Time Condition</b>               |  |
| <b>Time Condition</b>               | Users could customize holiday time, office time or a specified time to allow the outbound route to be used.  |

## Outbound Blacklist

The UCM6200 allows users to configure blacklist for outbound routes. If the dialing number matches the blacklist numbers or patterns, the outbound call will not be allowed. The outbound blacklist can be configured under UCM web UI->PBX->Basic Call/Routes->Outbound Routes: Outbound Blacklist.

Users can configure numbers, patterns or select country code to add in the blacklist. Please note that the blacklist settings applies to all outbound routes.



**Outbound blacklist** X

The blacklist (by CalleID) is used for all outbound routes.

Optional Country Codes:

- +  North America
- +  South America
- +  Europe
- +  Asia and the Middle East
- +  Africa
- +  Australia

**Blacklist Manage**

Add Blacklist Rule\*:  +

Blacklist list:

| Continent | Country | Blacklist Rule | Options |
|-----------|---------|----------------|---------|
| Custom    | Custom  | 654XXXXXXXX    |         |
| Europe    | Albania | 355            |         |

Total: 2 Show: 1/1 Go to:  Go 
First
Prev
Next
Last

Figure 118: Country Codes

## Inbound Routes

Inbound routes can be configured via Web GUI->**PBX->Basic/Call Routes->Inbound Routes**.

- Click on "Create New Inbound Rule" to add a new inbound route.
- Click on "Blacklist" to configure blacklist for all inbound routes.
- Click on to edit the inbound route.
- Click on to delete the inbound route.

## Inbound Rule Configurations

Table 61: Inbound Rule Configuration Parameters



|                              |   |
|------------------------------|---|
| <b>Trunks</b>                | Select the trunk to configure the inbound rule.   |
| <b>DID Pattern</b>           | <ul style="list-style-type: none"> <li>All patterns are prefixed with the "_".</li> <li>Special characters:<br/>           X: Any Digit from 0-9.<br/>           Z: Any Digit from 1-9.<br/>           N: Any Digit from 2-9.<br/>           ".": Wildcard. Match one or more characters.<br/>           "!": Wildcard. Match zero or more characters immediately.<br/>           Example: [12345-9] - Any digit from 1 to 9.</li> <li>The pattern can be composed of two parts, divided by a '/' character. The first part is used to specify the dialed number the second part is used to specify the caller ID and it is optional, if set it means only the extension with the specific caller ID is allowed to call in or call out. For example, patter '_2XXX/1234' means the only extension with the caller ID '1234' is allowed to use this rule.</li> </ul> |
| <b>Disable This Route</b>    | After creating the inbound route, users can choose to enable and disable it. If the route is disabled, it will not take effect anymore. However, the route settings will remain in UCM. Users can enable it again when it's needed.   |
| <b>Prepend Trunk Name</b>    | Prepend trunk name to display.  |
| <b>Alert-Info</b>            | Configure the Alert-Info, when UCM6200 receives an INVITE request, the Alert-Info header field specifies an alternative ring tone to the UAS.   |
| <b>Inbound Multiple Mode</b> | Multiple mode allows user to switch between destinations of the inbound rule by feature codes. Configure related feature codes in the " <b>Feature Codes</b> " page. If this option is enabled, user can use feature code to switch between different destinations.   |
| <b>Default Destination</b>   | <p>Select the default destination for the inbound call.</p> <ul style="list-style-type: none"> <li>Extension</li> <li>Voicemail</li> <li>Conference Room</li> <li>Queue</li> <li>Ring Group</li> <li>Paging/Intercom</li> <li>Voicemail Group</li> <li>Fax</li> <li>DISA</li> <li>IVR</li> <li>Dial by Name</li> <li>External Number</li> <li>By DID</li> </ul> <p>When "By DID" is used, the UCM6200 will look for the destination based on the number dialed, which could be local extensions, conference, call queue,</p>  |



|                        |   |
|------------------------|---|
|                        | ring group, paging/intercom group, IVR, voicemail groups and Fax extension as configured in "DID destination". If the dialed number matches the DID pattern, the call will be allowed to go through.  |
| <b>Strip</b>           | Configure the number of digits to be stripped from the beginning of the DID. This option shows up only when "By DID" is selected.   |
| <b>Prepend</b>         | Configure the number of digits to be prepended to an inbound DID pattern, with strip taking precedence over prepend.  |
| <b>Dial Trunk</b>      | This option shows up only when "By DID" is selected. If enabled, the external users dialing in to the trunk via this inbound route can dial outbound call using the UCM6200's trunk.  |
| <b>DID Destination</b> | <p>This option shows up only when "By DID" is selected. This controls the destination that can be reached by the external caller via the inbound route. The DID destination are:</p> <ul style="list-style-type: none"> <li>• Extension</li> <li>• Conference</li> <li>• Call Queue</li> <li>• Ring Group</li> <li>• Paging/Intercom Groups</li> <li>• IVR</li> <li>• Voicemail Groups</li> <li>• Fax Extension</li> <li>• Dial by Name</li> <li>• All</li> </ul> |
| <b>Time Condition</b>  |   |
| <b>Time Conditions</b> | Select the time condition for the inbound rule.   |
| <b>Destination</b>     | Select the destination for the inbound call during the specified time condition.  |

### Inbound Route: Prepend Example

UCM6200 now allows user to prepend digits to an inbound DID pattern, with strip taking precedence over prepend. With the ability to prepend digits in inbound route DID pattern, user no longer needs to create multiple routes for the same trunk in order to route calls to different extensions.



**Edit Inbound Rule**

**DID Pattern \***:  /

**Prepend Trunk Name**:

**Alert-Info**:

**Inbound Multiple Mode**:

**Dial Trunk**:

**DID Destination**:  Extension  Conference  Call Queue  Ring Group  
 Paging/Intercom Groups  IVR  Voicemail Groups  
 Fax Extension  Dial By Name  All

**Default Mode** | **Mode 1**

**Default Destination \***:

**Strip**:

**Prepend**:

**Figure 119: Inbound Route feature: Prepend**


The following example demonstrates the process,

1. If Trunk provides a DID pattern of 18005251163.
2. If **Strip** is set to 8, UCM6200 will strip the first 8 digits.
3. If **Prepend** is set to 2, UCM6200 will then prepend a 2 to the stripped number, now the number become 2163.
4. UCM6200 will now forward the incoming call to extension 2163.

### **Inbound Route: Multiple Mode**

In the UCM6200, the user can configure inbound route to enable multiple mode to switch between different destinations. The inbound multiple mode can be enabled under Inbound Route settings.



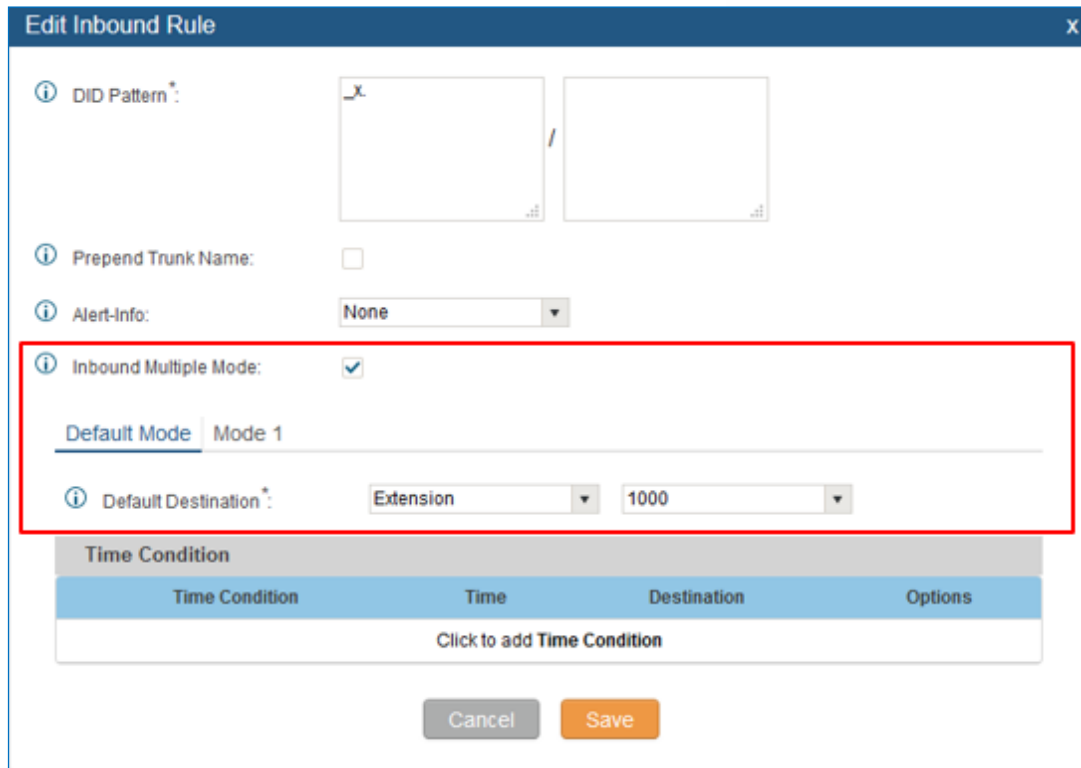

**Edit Inbound Rule**

/

Prepend Trunk Name:

Alert-Info:

Inbound Multiple Mode:

Default Destination:

| Time Condition              |      |             |         |
|-----------------------------|------|-------------|---------|
| Time Condition              | Time | Destination | Options |
| Click to add Time Condition |      |             |         |

**Figure 120: Inbound Route - Multiple Mode**

When Multiple Mode is enabled for the inbound route, the user can configure a “Default Destination” and a “Mode 1” destination for this route. By default, the call coming into this inbound route will be routed to the default destination.

SIP end devices that have registered on the UCM6200 can dial feature code \*62 to switch to inbound route “Mode 1” and dial feature code \*61 to switch back to “Default Destination”. Switching between different mode can be easily done without web UI login.

For example, the customer service hotline destination has to be set to a different IVR after 7PM. The user can dial \*62 to switch to “Mode 1” with that IVR set as the destination before off work.

## FAX Intelligent Route

The UCM6200 can automatically detect Fax and phone signal coming from the FXO port, and then forward Fax or phone signal to the right destination. For example, when a regular phone call is coming, the UCM6200 will be able to detect the phone signal and forward it through the correct inbound route to the destination; if Fax signal is coming, the UCM6200 will be able to forward it to the FXS extension where the Fax machine is connected.







## FAX with Two Media

The UCM6200 supports Fax re-invite with multiple codec negotiation. If a Fax re-invite contains both T.38 and PCMA/PCMU codec, UCM6200 will choose T.38 codec over PCMA/PCMU.

## Blacklist Configurations

In the UCM6200, Blacklist is supported for all inbound routes. Users could enable the Blacklist feature and manage the Blacklist by clicking on "Blacklist".

- Select the checkbox for "Blacklist Enable" to turn on Blacklist feature for all inbound routes. Blacklist is disabled by default.
- Enter a number in "Add Blacklist Number" field and then click  to add to the list. Anonymous can also be added as a Blacklist Number.
- To remove a number from the Blacklist, select the number in "Blacklist list" and click on .

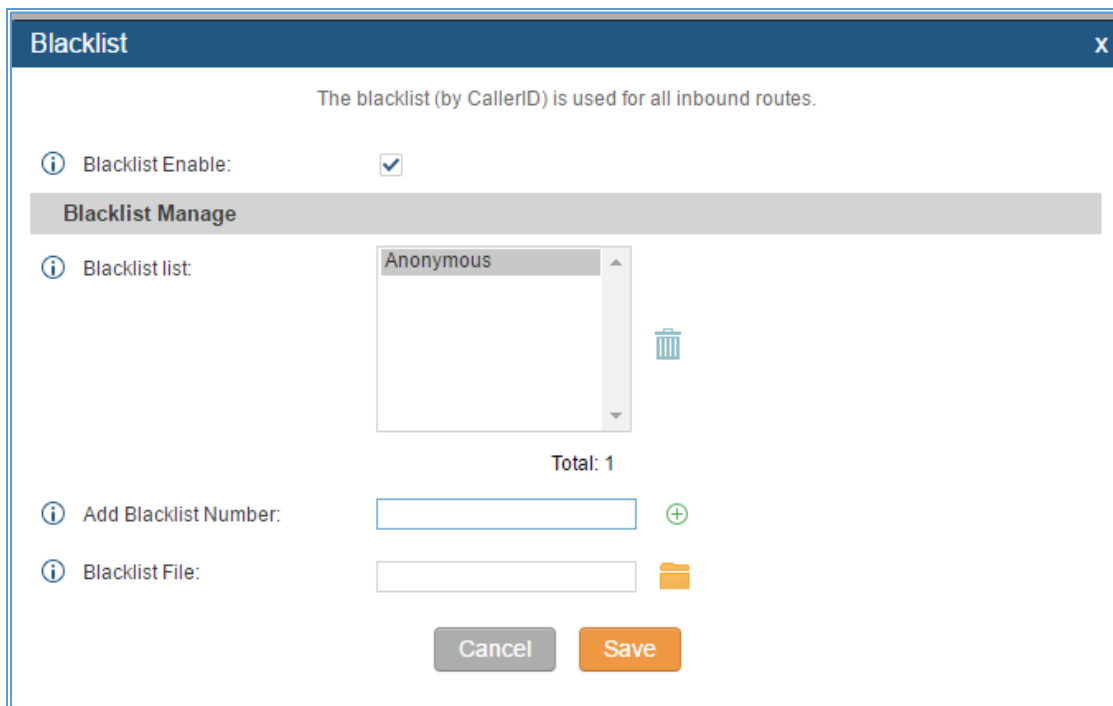

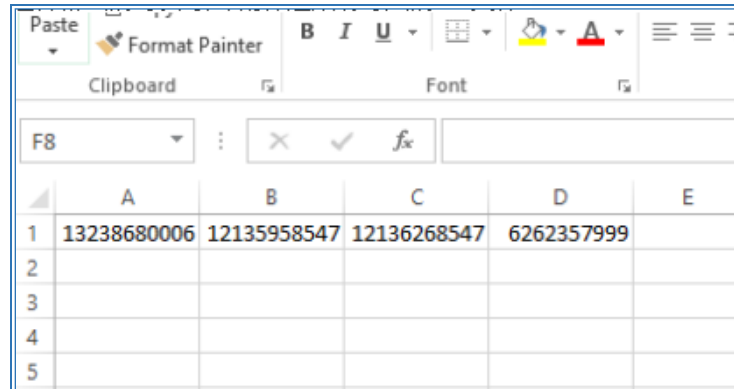


Figure 121: Blacklist Configuration Parameters

- To add blacklist number in batch, click on  to upload blacklist file in csv format. The supported csv format is as below.





|   | A           | B           | C           | D          | E |
|---|-------------|-------------|-------------|------------|---|
| 1 | 13238680006 | 12135958547 | 12136268547 | 6262357999 |   |
| 2 |             |             |             |            |   |
| 3 |             |             |             |            |   |
| 4 |             |             |             |            |   |
| 5 |             |             |             |            |   |

Figure 122: Blacklist csv File

---

 **Note:**

Users could also add a number to the Blacklist or remove a number from the Blacklist by dialing the feature code for "Blacklist Add" (default: \*40) and "Blacklist Remove" (default: \*41) from an extension. The feature code can be configured under Web GUI->**PBX->Internal Options->Feature Codes**.

---





## CONFERENCE BRIDGE

The UCM6200 supports conference bridge allowing multiple bridges used at the same time:

- UCM6202/6204 supports up to 3 conference bridges allowing up to 25 simultaneous PSTN or IP participants.
- UCM6208 supports up to 6 conference bridges allowing up to 32 simultaneous PSTN or IP participants.

The conference bridge configurations can be accessed under Web GUI->**PBX->Call Features->Conference**. In this page, users could create, edit, view, invite, manage the participants and delete conference bridges. The conference bridge status and conference call recordings (if recording is enabled) will be displayed in this web page as well.

### Conference Bridge Configurations

- Click on "Create New Conference Room" to add a new conference bridge.
- Click on  to edit the conference bridge.
- Click on  to delete the conference bridge.

**Table 62: Conference Bridge Configuration Parameters**

|                       |  |
|-----------------------|--|
| <b>Extension</b>      | Configure the conference number for the users to dial into the conference.   |
| <b>Password</b>       | <p>When configured, the users who would like to join the conference call must enter this password before accessing the conference bridge.</p> <p><b>Note:</b></p> <ul style="list-style-type: none"> <li>• If "Public Mode" is enabled, the password is not required to join the conference bridge thus this field is invalid.</li> <li>• The password has to be at least 4 characters.</li> </ul>   |
| <b>Admin Password</b> | <p>Configure the password to join the conference bridge as administrator. Conference administrator can manage the conference call via IVR (if "Enable Caller Menu" is enabled) as well as invite other parties to join the conference by dialing "0" (permission required from the invited party) or "1" (permission not required from the invited party) during the conference call.</p> <p><b>Note:</b></p> <ul style="list-style-type: none"> <li>• If "Public Mode" is enabled, the password is not required to join the conference bridge thus this field is invalid.</li> <li>• The password has to be at least 4 characters.</li> </ul> |



|  |  |
|--|--|
| <b>Enable Caller Menu</b>  | If enabled, conference participant could press the * key to access the conference bridge menu. The default setting is "No".  |
| <b>Record Conference</b>   | If enabled, the calls in this conference bridge will be recorded automatically in a .wav format file. All the recording files will be displayed and can be downloaded in the conference web page. The default setting is "No".   |
| <b>Quiet Mode</b>  | If enabled, if there are users joining or leaving the conference, voice prompt or notification tone won't be played. The default setting is "No".<br><b>Note:</b><br>"Quiet Mode" and "Announce Callers" cannot be enabled at the same time.   |
| <b>Wait For Admin</b>  | If enabled, the participants will not hear each other until the conference administrator joins the conference. The default setting is "No".<br><b>Note:</b><br>If "Quiet Mode" is enabled, the voice prompt for "Wait For Admin" will not be announced.  |
| <b>Enable User Invite</b>  | If enabled, users could press 0 to invite other users (with the users' permission) or press 1 to invite other users (without the user's permission) to join the conference. The default setting is "No".<br><b>Note:</b><br>Conference administrator can always invite other users without enabling this option. |
| <b>Announce Callers</b>  | If enabled, the caller will be announced to all conference participants when there the caller joins the conference. The default setting is "No".<br><b>Note:</b><br>"Quiet Mode" and "Announce Callers" cannot be enabled at the same time.  |
| <b>Public Mode</b>   | If enabled, no authentication will be required when joining the conference call. The default setting is "Yes".   |
| <b>Play Hold Music</b>   | If enabled, the UCM6200 will play Hold music when there is only one user in the conference. The default setting is "No".   |
| <b>Music On Hold</b>   | Select the music on hold class to be played in conference call. Music On Hold class can be set up under web UI-> <b>PBX-&gt;Internal Options-&gt;Music On Hold</b> .   |
| <b>Skip Authentication When Inviting User via Trunk from Web GUI</b> | If enabled, the invitation from Web GUI for a conference bridge with password will skip the authentication for the invited users. The default setting is "No".   |

Conference Settings contains the following options:

**Table 63: Conference Settings**

|                              |   |
|------------------------------|---|
| <b>Enable Talk detection</b> | If enabled, the AMI will send the corresponding event when a user starts or ends talking. |
|------------------------------|---|



|                              |  |
|------------------------------|--|
| <b>DSP Talking Threshold</b> | The time in milliseconds of sound above what the dsp has established as base line silence for a user before a user is considered to be talking. This value affects several operations and should not be changed unless the impact on call quality is fully understood, the default value is 128.   |
| <b>DSP Silence Threshold</b> | The time in milliseconds of sound falling within the what the dsp has established as base line silence before a user is considered to be silent. This value affects several operations and should not be changed unless the impact on call quality is fully understood, the default value is 2500. |

Users can check the talking Caller IDs in conference control page (UCM WebUI-> Call Features-> Conference). The image will move up and down when the user is talking.

**Conference**

[Create New Conference Room](#)
[Conference Settings](#)
 Auto Refresh 
 Enable CEI Notify

Note: The Multi-Conference Bridge can be created between two rooms on the same UCM or different UCMs. If bridging between two UCMs, the UCMs must be connected to each other via a SIP trunk. IAX, Analog trunks and Digital trunks are not supported.

| Room | Attendee  | Administrator | Start Time          | Activity | Options |
|------|-----------|---------------|---------------------|----------|---------|
| 6300 | 2         | 0             | 2016-11-15 12:25:33 | 01:34:16 |         |
| User | Caller ID | Caller Name   | Channel Name        | Activity | Options |
| 1    | 2001      |               | PJSIP/2001-00000005 | 01:34:16 |         |
| 2    | 2000      |               | PJSIP/2000-00000006 | 01:34:10 |         |

Figure 123: Conference

## Join A Conference Call


Users could dial the conference bridge extension to join the conference. If password is required, enter the password to join the conference as a normal user, or enter the admin password to join the conference as administrator.


## Invite Other Parties to Join Conference

When using the UCM6200 conference bridge, there are two ways to invite other parties to join the conference.

- Invite from Web GUI.



For each conference bridge in UCM6200 Web GUI->**PBX**->**Call Features**->**Conference**, there is an icon  for option "Invite a participant". Click on it and enter the number of the party you would like to invite. Then click on "Add". A call will be sent to this number to join it into the conference.

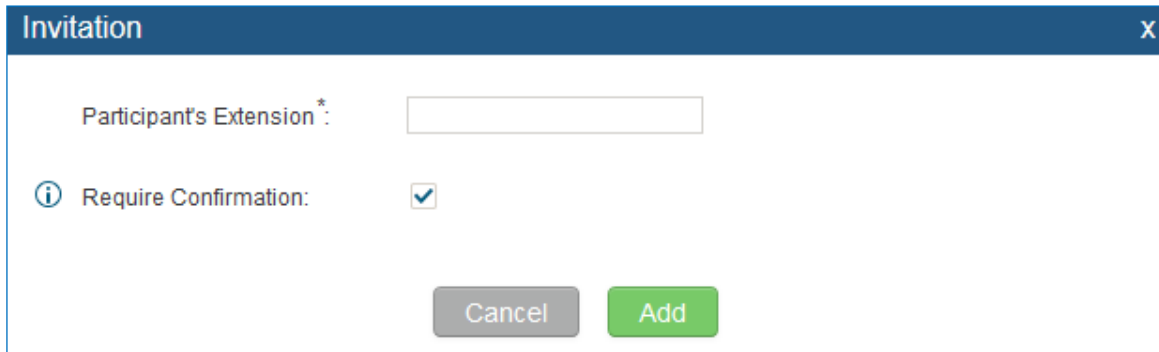

**Figure 124: Conference Invitation From Web GUI**

- Invite by dialing 0 or 1 during conference call.

A conference participant can invite other parties to the conference by dialing from the phone during the conference call. Please make sure option "Enable User Invite" is turned on for the conference bridge first. Enter 0 or 1 during the conference call. Follow the voice prompt to input the number of the party you would like to invite. A call will be sent to this number to join it into the conference.

**0:** If 0 is entered to invite other party, once the invited party picks up the invitation call, a permission will be asked to "accept" or "reject" the invitation before joining the conference.

**1:** If 1 is entered to invite other party, no permission will be required from the invited party.

---

 **Note:**

Conference administrator can always invite other parties from the phone during the call by entering 0 or 1. To join a conference bridge as administrator, enter the admin password when joining the conference. A conference bridge can have multiple administrators.

---





## During The Conference

During the conference call, users can manage the conference from web GUI or IVR.

- Manage the conference call from Web GUI.



Log in UCM6200 web GUI during the conference call, the participants in each conference bridge will be listed.

1. Click on  to kick a participant from the conference.
  2. Click on  to mute the participant.
  3. Click on  to lock this conference bridge so that other users cannot join it anymore.
  4. Click on  to invite other users into the conference bridge.
- Manage the conference call from IVR.

If "Enable Caller Menu" is enabled, conference participant can input \* to enter the IVR menu for the conference. Please see options listed in the table below.

**Table 64: Conference Caller IVR Menu**

| Conference Administrator IVR Menu |   |
|-----------------------------------|---|
| 1                                 | Mute/unmute yourself.   |
| 2                                 | Lock/unlock the conference bridge.  |
| 3                                 | Kick the last joined user from the conference.  |
| 4                                 | Decrease the volume of the conference call.   |
| 5                                 | Decrease your volume.   |
| 6                                 | Increase the volume of the conference call.   |
| 7                                 | Increase your volume.   |
| 8                                 | More options. <ul style="list-style-type: none"> <li>• 1: List all users currently in the conference call.</li> <li>• 2: Kick all non-Administrator participants from the conference call.</li> <li>• 3: Mute/Unmute all non-Administrator participants from the conference call.</li> <li>• 4: Record the conference call.</li> <li>• 8: Exit the caller menu and return to the conference.</li> </ul> |
| Conference User IVR Menu          |   |
| 1                                 | Mute/unmute yourself.   |
| 4                                 | Decrease the volume of the conference call.   |
| 5                                 | Decrease your volume.   |
| 6                                 | Increase the volume of the conference call.   |
| 7                                 | Increase your volume.   |
| 8                                 | Exit the caller menu and return to the conference.  |





 **Note:**





When there is participant in the conference, the conference bridge configuration cannot be modified.

## Record Conference

The UCM6200 allows users to record the conference call and retrieve the recording from web GUI->**PBX->Call Features->Conference**.

To record the conference call, when the conference bridge is in idle, enable "Record Conference" from the conference bridge configuration dialog. Save the setting and apply the change. When the conference call starts, the call will be automatically recorded in .wav format.

The recording files will be listed as below once available. Users could click on  to download the recording or click on  to delete the recording. Users could also delete all recording files by clicking on "Delete All Recording Files", or delete multiple recording files at once by clicking on "Delete Selected Recording Files" after selecting the recording files.

| Conference Recordings                                    |  |   |                               |           |   |
|--|--|---|-------------------------------|-----------|---|
| <input type="checkbox"/> Delete Selected Recording Files |  | <input type="checkbox"/> Delete All Recording Files |                               | View: 10  |   |
| <input type="checkbox"/>                                 | Name                                     | Room  | Date                          | Size      | Options   |
| <input type="checkbox"/>                                 | meetme-conf-rec-6300-1407280814.30-0.wav | 6300  | 2014-08-05 19:20:36 UTC-04:00 | 341.29 KB |   |
| <input type="checkbox"/>                                 | meetme-conf-rec-6300-1407280506.27-0.wav | 6300  | 2014-08-05 19:15:32 UTC-04:00 | 396.92 KB |   |

Total: 2 Show: 1/1 Go to:  Go First Prev Next Last

**Figure 125: Conference Recording**





# CONFERENCE SCHEDULE

## Conference Schedule Configuration

Conference Schedule can be found under UCM6200 web **UI->PBX->Call Features->Conference Schedule**. Users can create, edit, view and delete a Conference Schedule.

- Click on “Create New Conference Schedule” to add a new Conference Schedule.
- Click on the scheduled conference to edit or delete the event.

After the user configures UCM6200 with Google Service Settings **[Google Service Settings Support]** and enables Google Calendar for Conference Schedule, the conference schedule on the UCM6200 can be synchronized with Google Calendar for authorized Google account.

Table 65: Conference Schedule Parameters

| Schedule Options                |   |
|---------------------------------|---|
| <b>Conference Topic</b>         | Configure the name of the scheduled conference. Letters, digits, _ and - are allowed.   |
| <b>Conference Room</b>          | Select a conference room for this scheduled conference.   |
| <b>Kick Time(m)</b>             | Set kick time before conference starts. When kick time is reached, a warning prompt will be played for all attendees in the conference room. After 5 minutes, this conference room will be cleared and locked for the scheduled conference to begin.<br><b>Note:</b> Kick Time cannot be less than 6 minutes in order to clear the conference room. |
| <b>Description</b>              | The description of scheduled conference.  |
| <b>Repeat</b>                   | Repeat interval of scheduled conference. By default it's set to single event.   |
| <b>Schedule Time</b>            | Configure the beginning date and duration of scheduled conference.<br><b>Note:</b> Please pay attention to avoid time conflict on schedules in the same conference room.  |
| <b>Enable Google Calendar</b>   | Select this option to sync scheduled conference with Google Calendar.<br><b>Note:</b> Google Service Setting OAuth2.0 must be configured on the UCM6200. Please refer to section <b>[Google Service Settings Support]</b> .   |
| <b>Conference Administrator</b> | Select the administrator of scheduled conference from selected extensions.<br><b>Note:</b> “Public Mode” must be disabled from Conference Room Options tab.   |
| <b>Local Extension</b>          | Select available extensions from the list to attend scheduled conference.   |
| <b>Remote Extension</b>         | Select available extensions from the remote peer PBX.   |



|                                |   |
|--------------------------------|---|
|                                | <b>Note:</b> “LDAP Sync” must be enabled on the UCM6200 in order to view remote extensions here.  |
| <b>Special Extension</b>       | Add extensions that are not in the list (both local and remote list). If the user wishes to add the special extension, please match the pattern on the outbound route.  |
| <b>Remote Conference</b>       | Invite a remote conference.   |
| <b>Conference Room Options</b> |   |
| <b>Password</b>                | Configure conference room password. Please note that if “Public Mode” is enabled, this option is automatically disabled.  |
| <b>Admin Password</b>          | Configure the password to join as conference administrator. Please note that if “Public Mode” is enabled, this option is automatically disabled.  |
| <b>Enable Caller Menu</b>      | If this option is enabled, conference participants will be able to access conference bridge menu by pressing the * key.   |
| <b>Record Conference</b>       | If this option is enabled, conference call will be recorded in .wav format. The recorded file can be found from <b>Conference</b> page.   |
| <b>Quiet Mode</b>              | If this option is enabled, the notification tone or voice prompt for joining or leaving the conference won't be played.<br><b>Note:</b> Option “Quiet Mode” and option “Announce Caller” cannot be enabled at the same time.  |
| <b>Wait For Admin</b>          | If this option is enabled, the participants in the conference won't be able to hear each other until conference administrator joins the conference.<br><b>Note:</b> If “Quiet Mode” is enabled, voice prompt for this option won't be played.   |
| <b>Enable User Invite</b>      | If this option is enabled, the user can: <ul style="list-style-type: none"> <li>• Press ‘0’ to invite others to join the conference with invited party's permission</li> <li>• Press ‘1’ to invite without invited party's permission</li> <li>• Press ‘2’ to create a multi-conference bridge to another conference room</li> <li>• Press ‘3’ to drop all current multi-conference bridges</li> </ul> <b>Note:</b> Conference Administrator is always allowed to access this menu. |
| <b>Announce Callers</b>        | If this option is enabled, when a participant joins the conference room, participant's name will be announced to all members in the conference room.<br><b>Note:</b> Option “Quiet Mode” and option “Announce Caller” cannot be enabled at the same time.   |
| <b>Public Mode</b>             | If this option is enabled, no authentication is required for entering the conference room.<br><b>Note:</b> Please be aware of the potential security risks when turning on this option.   |
| <b>Play Hold Music</b>         | If this option is enabled, UCM6200 will play Hold Music while there is only one participant in the conference room or the conference is not yet started.  |
| <b>Skip Authentication</b>     | If this option is enabled, the invitation from Web GUI via a trunk with password  |



**When Inviting Users via Trunk from Web GUI**

won't require authentication.

**Note:** Please be aware of the potential security risks when turning on this option.


- Cleaner Options

**Cleaner Options**

|  |  |
|--|--|
| <b>Enable Conference Schedules Cleaner</b> | If this option is enabled, conference schedules will be automatically cleaned as configured. |
| <b>Conference Schedules Clean Time</b>     | Enter the clean time (in hours). The valid range is from 0 to 23.                            |
| <b>Clean Interval</b>                      | Enter the clean interval (in days). The valid range is from 1 to 30.                         |

- Show/hide Conference Schedule Table

Enable this option will allow web UI to display scheduled conference in Conference Schedule Table. Please see figure below.

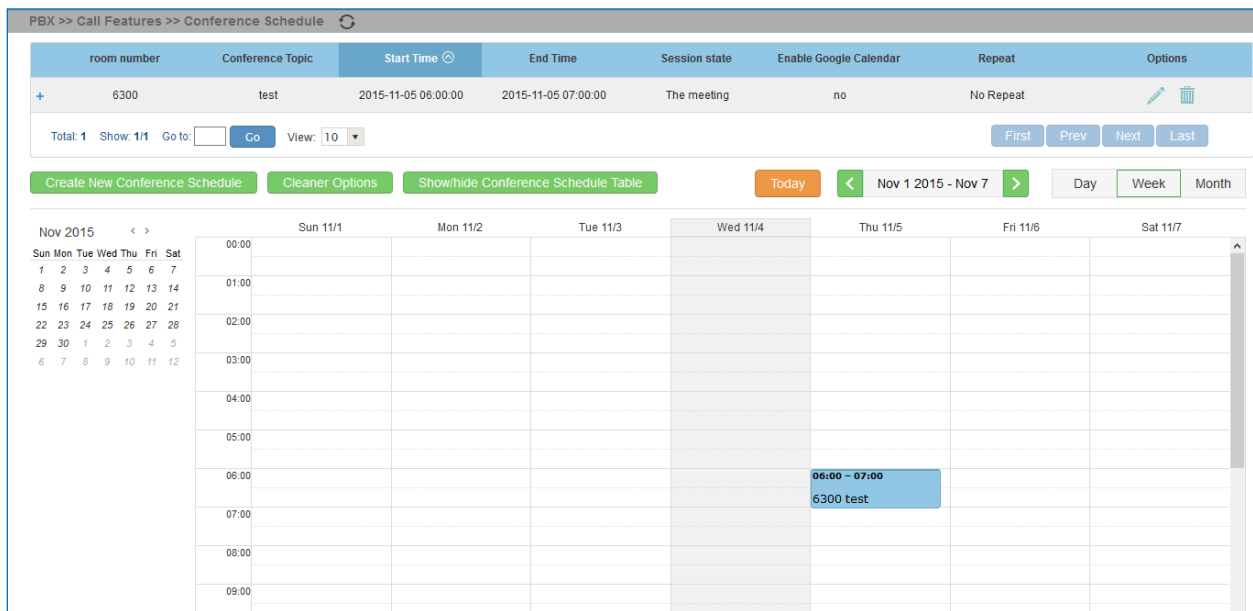

**Figure 126: Conference Schedule**

Once the conference room is scheduled, at the kick time, all users will be removed from conference room and no extension is allowed to join the conference room anymore. At the scheduled conference time, UCM6200 will send INVITE to the extensions that have been selected for conference.





**Note:**

- Please make sure that outbound route is properly configured for remote extensions to join the conference.
  - Once Kick Time is reached, Conference Schedule is locked and cannot be modified.
-

## IVR

### Configure IVR

IVR configurations can be accessed under the UCM6200 Web GUI->**PBX->Call Features->IVR**. Users could create, edit, view and delete an IVR.

- Click on "Create New IVR" to add a new IVR.
- Click on  to edit the IVR configuration.
- Click on  to delete the IVR.

**Table 66: IVR Configuration Parameters**

| Basic Settings           |   |
|--------------------------|---|
| <b>Name</b>              | Configure the name of the IVR. Letters, digits, _ and - are allowed.  |
| <b>Extension</b>         | Enter the extension number for users to access the IVR.   |
| <b>DID Destination</b>   | <p>This option shows up only when "By DID" is selected. This controls the destination that can be reached by the external caller via the inbound route. The DID destination are:</p> <ul style="list-style-type: none"> <li>• Extension</li> <li>• Conference</li> <li>• Call Queue</li> <li>• Ring Group</li> <li>• Paging/Intercom Groups</li> <li>• Voicemail Groups</li> <li>• Fax Extension</li> <li>• Dial by Name</li> <li>• All</li> </ul>  |
| <b>Dial Trunk</b>        | If enabled, all callers to the IVR is allowed to use trunk. The permission must be configured for the users to use the trunk first. The default setting is "No".  |
| <b>Permission</b>        | Assign permission level for outbound calls if "Dial Trunk" is enabled. The available permissions are "Internal", "Local", "National" and "International" from the lowest level to the highest level. The default setting is "Internal". If the user tries to dial outbound calls after dialing into the IVR, the UCM6200 will compared the IVR's permission level with the outbound route's privilege level. If the IVR's permission level is higher than (or equal to) the outbound route's privilege level, the call will be allowed to go through. |
| <b>Replace Caller ID</b> | If enabled, the UCM will replace the caller display name with the IVR name the caller know whether the call is incoming from a direct extension or an IVR.  |
| <b>Alert Info</b>        | When present in an INVITE request, the alert-Info header field specifies and  |



|                                      |  |
|--------------------------------------|--|
|                                      | alternative ring tone to the UAS.  |
| <b>Welcome Prompt</b>                | Select an audio file to play as the welcome prompt for the IVR. Click on "Prompt" to add additional audio file under web GUI-> <b>Internal Options-&gt;IVR Prompt</b> .  |
| <b>Digit Timeout</b>                 | Configure the timeout between digit entries. After the user enters a digit, the user needs to enter the next digit within the timeout. If no digit is detected within the timeout, the UCM6200 will consider the entries complete. The default timeout is 3 seconds.   |
| <b>Response Timeout</b>              | After playing the prompts in the IVR, the UCM6200 will wait for the DTMF entry within the timeout (in seconds). If no DTMF entry is detected within the timeout, a timeout prompt will be played. The default setting is 10 seconds.   |
| <b>Response Timeout Prompt</b>       | Select the prompt message to be played when timeout occurs.  |
| <b>Invalid Prompt</b>                | Select the prompt message to be played when an invalid extension is pressed.   |
| <b>Response Timeout Repeat Loops</b> | Configure the number of times to repeat the prompt if no DTMF input is detected. When the loop ends, it will go to the timeout destination if configured, or hang up. The default setting is 3.  |
| <b>Invalid Repeat Loops</b>          | Configure the number of times to repeat the prompt if the DTMF input is invalid. When the loop ends, it will go to the invalid destination if configured, or hang up. The default setting is 3.  |
| <b>Language</b>                      | Select the voice prompt language to be used for this IVR. The default setting is "Default" which is the selected voice prompt language under web GUI-> <b>PBX-&gt;Internal Options-&gt;Language</b> . The dropdown list shows all the current available voice prompt languages on the UCM6200. To add more languages in the list, please download voice prompt package by selecting "Check Prompt List" under web GUI-> <b>PBX-&gt;Internal Options-&gt;Language</b> . |

### Key Pressing Events

|                         |  |
|-------------------------|--|
| <b>Key Press Event:</b> | Select the event for each key pressing for 0-9, *, Timeout and Invalid. The event options are: |
| <b>Press 0</b>          |  |
| <b>Press 1</b>          | • Extension  |
| <b>Press 2</b>          | • Voicemail  |
| <b>Press 3</b>          | • Conference Rooms   |
| <b>Press 4</b>          | • Voicemail Group  |
| <b>Press 5</b>          | • IVR  |
| <b>Press 6</b>          | • Ring Group   |
| <b>Press 7</b>          | • Queues   |
| <b>Press 8</b>          | • Page Group   |
| <b>Press 9</b>          | • Fax  |
| <b>Press *</b>          | • Custom Prompt  |
| <b>Timeout</b>          | • Hangup   |



**Invalid**


- DISA
- Dial by Name
- External Number
- Callback

## Black/White List in IVR

In some scenarios, the IPPBX administrator needs to restrict the extensions that can be reached from IVR. For example, the company CEO and directors prefer only receiving calls transferred by the secretary, some special extensions are used on IP surveillance end points which shouldn't be reached from external calls via IVR for privacy reason. UCM has now added blacklist and whitelist in IVR settings for users to manage this.

To use this feature, log in UCM web UI and navigate to PBX->Call Features->IVR->Create/Edit IVR: IVR Black/White List.

- If the user selects "Blacklist Enable" and adds extension in the list, the extensions in the list will not be allowed to be reached via IVR.
- If the user selects "Whitelist Enable" and adds extension in the list, only the extensions in the list can be allowed to be reached via IVR.

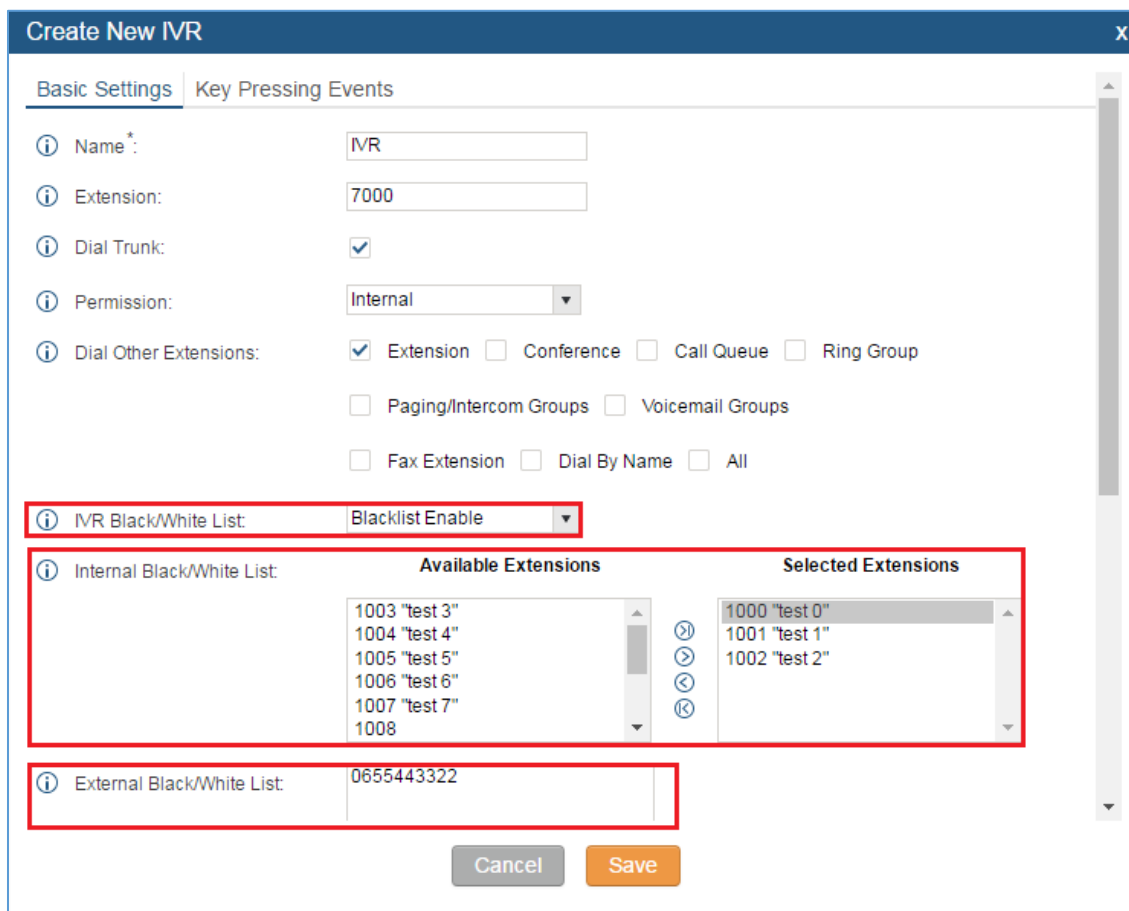

**Create New IVR**

**Basic Settings** | Key Pressing Events

Name\*: IVR

Extension: 7000

Dial Trunk:

Permission: Internal

Dial Other Extensions:  Extension  Conference  Call Queue  Ring Group  
 Paging/Intercom Groups  Voicemail Groups  
 Fax Extension  Dial By Name  All

IVR Black/White List: Blacklist Enable

Internal Black/White List:

| Available Extensions | Selected Extensions |
|----------------------|---------------------|
| 1003 "test 3"        | 1000 "test 0"       |
| 1004 "test 4"        | 1001 "test 1"       |
| 1005 "test 5"        | 1002 "test 2"       |
| 1006 "test 6"        |                     |
| 1007 "test 7"        |                     |
| 1008                 |                     |

External Black/White List: 0655443322


Cancel Save

Figure 127: Black/White List



## Create Custom Prompt

To record new IVR prompt or upload IVR prompt to be used in IVR, click on “Prompt” next to the “Welcome Prompt” option and the users will be redirected to Custom Prompt page. Or users could go to Web GUI->**PBX->Internal Options->Custom Prompt** page directly.

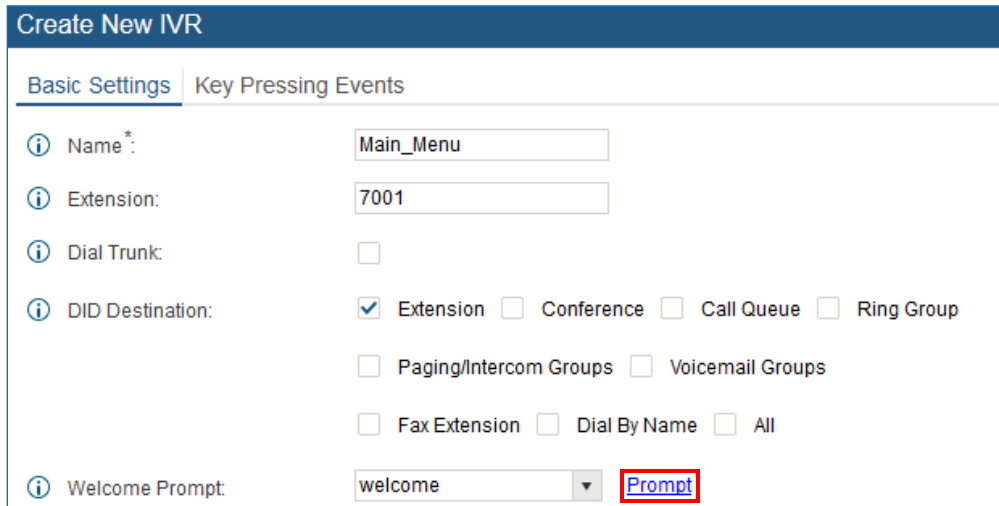

Create New IVR

Basic Settings
Key Pressing Events

i Name \*:

i Extension:

i Dial Trunk:

i DID Destination:  Extension  Conference  Call Queue  Ring Group

Paging/Intercom Groups  Voicemail Groups

Fax Extension  Dial By Name  All

i Welcome Prompt:  Prompt

**Figure 128: Click on Prompt to Create IVR Prompt**

Once the IVR prompt file is successfully added to the UCM6200, it will be added into the prompt list options for users to select in different IVR scenarios.





## LANGUAGE SETTINGS FOR VOICE PROMPT

The UCM6200 supports multiple languages in web GUI as well as system voice prompt. Currently, there are 16 languages supported in system voice prompt: **English (United States), Arabic, Chinese, Dutch, English (United Kingdom), French, German, Greek, Hebrew, Italian, Polish, Portuguese, Russian, Spanish, Swedish and Turkish.**

English (United States) and Chinese voice prompts are built in with the UCM6200 already. The other languages provided by Grandstream can be downloaded and installed from the UCM6200 web GUI directly. Additionally, users could customize their own voice prompts, package them and upload to the UCM6200.

Language settings for voice prompt can be accessed under Web GUI->**PBX->Internal Options->Language.**

### Download and Install Voice Prompt Package

To download and install voice prompt package in different languages from UCM6200 web GUI, click on "Check Prompt List" button.

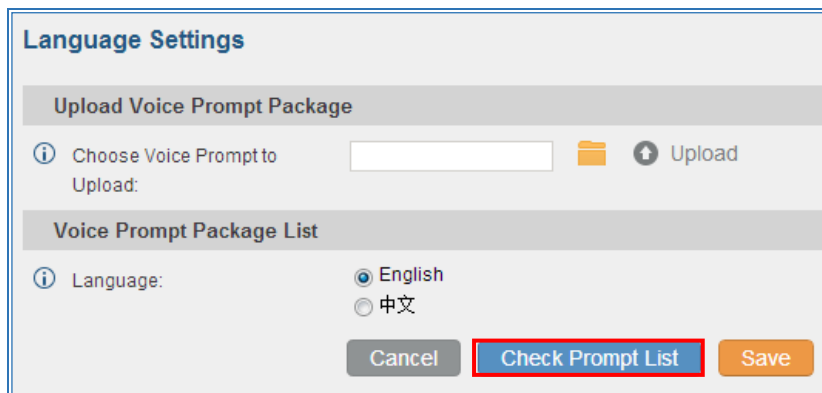



Figure 129: Language Settings for Voice Prompt

A new dialog window of voice prompt package list will be displayed. Users can see the version number (latest version available V.S. current installed version), package size and options to upgrade or download the language.





| Voice Prompt Package List | Version (Remote / Local) | Size | Options |
|---------------------------|--------------------------|------|---------|
| British English           | 1.0/-                    | 3.7M | ↓       |
| Deutsch                   | 1.1/-                    | 3.5M | ↓       |
| English                   | 1.0/1.0                  | 5.1M | ⊕       |
| Español                   | 1.1/-                    | 3.7M | ↓       |
| Ελληνικά                  | 1.0/-                    | 3.6M | ↓       |
| Français                  | 1.0/-                    | 3.5M | ↓       |
| Italiano                  | 1.0/-                    | 3.4M | ↓       |
| Nederlands                | 1.0/-                    | 3.0M | ↓       |
| Polski                    | 1.0/-                    | 4.2M | ↓       |
| Português                 | 1.1/-                    | 3.7M | ↓       |
| Русский                   | 1.1/-                    | 3.2M | ↓       |
| Svenska                   | 1.0/-                    | 3.9M | ↓       |
| Türkçe                    | 1.0/-                    | 3.1M | ↓       |
| עברית                     | 1.0/-                    | 3.4M | ↓       |
| العربية                   | 1.1/-                    | 4.3M | ↓       |

**Figure 130: Voice Prompt Package List**

Click on  to download the language to the UCM6200. The installation will be automatically started once the downloading is finished.

### Language Settings

**Upload Voice Prompt Package**

ⓘ Choose Voice Prompt to    Upload

Upload:

**Voice Prompt Package List**

ⓘ Language:
 

- English
- 中文
- Deutsch

⊗ Delete


**Figure 131: New Voice Prompt Language Added**

A new language option will be displayed after successfully installed. Users then could select it to apply in the UCM6200 system voice prompt or delete it from the UCM6200.





## Customize Specific Prompt

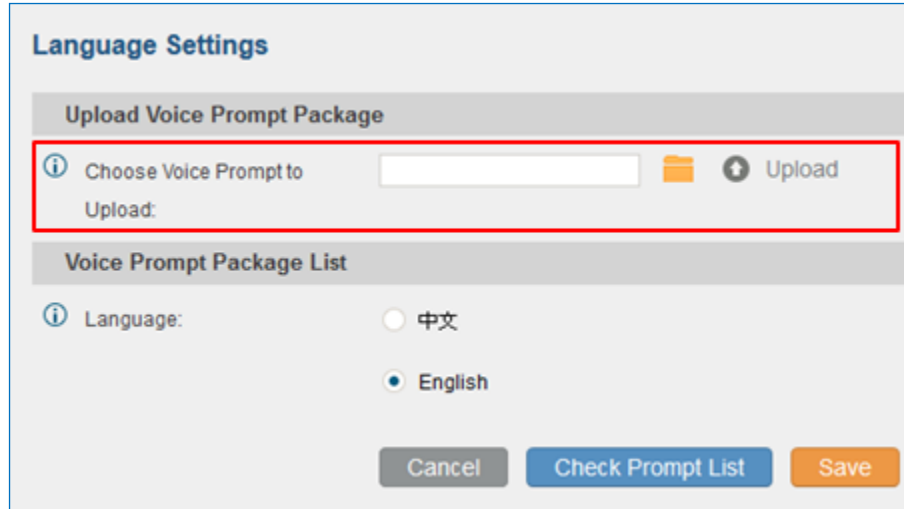On the UCM6200, if the user needs to replace some specific customized prompt, the user can upload a single specific customized prompt from web **UI->PBX->Internal Options->Language** instead of the entire language pack.



**Language Settings**

**Upload Voice Prompt Package**

Choose Voice Prompt to Upload:    Upload

**Voice Prompt Package List**

Language:  中文  English

Cancel Check Prompt List Save

Figure 132: Upload Single Voice Prompt for Entire Language Pack



## VOICEMAIL

### Configure Voicemail

If the voicemail is enabled for UCM6200 extensions, the configurations of the voicemail can be globally set up and managed under Web GUI->**PBX->Call Features->Voicemail**.

**Table 67: Voicemail Settings**

|                                   |  |
|-----------------------------------|--|
| <b>Max Greeting</b>               | Configure the maximum number of seconds for the voicemail greeting. The default setting is 60 seconds.   |
| <b>Dial '0' For Operator</b>      | If enabled, the caller can press 0 to exit the voicemail application and connect to the configured operator's extension. The operator extension can be configured under web GUI-> <b>PBX-&gt;Internal Options-&gt;General</b> .  |
| <b>Max Messages Per Folder</b>    | Configure the maximum number of messages per folder in users' voicemail. The valid range 10 to 1000. The default setting is 50.  |
| <b>Max Message Time</b>           | Select the maximum duration of the voicemail message. The message will not be recorded if the duration exceeds the max message time. The default setting is 15 minutes. The available options are: <ul style="list-style-type: none"> <li>• 1 minute</li> <li>• 2 minutes</li> <li>• 5 minutes</li> <li>• 15 minutes</li> <li>• 30 minutes</li> <li>• Unlimited</li> </ul>   |
| <b>Min Effective Message Time</b> | Configure the minimum duration (in seconds) of a voicemail message. Messages will be automatically deleted if the duration is shorter than the Min Message Time. The default setting is 3 seconds. The available options are: <ul style="list-style-type: none"> <li>• No minimum</li> <li>• 1 second</li> <li>• 2 seconds</li> <li>• 3 seconds</li> <li>• 4 seconds</li> <li>• 5 seconds</li> </ul> <p><b>Note:</b><br/>Silence and noise duration are not counted in message time.</p> |
| <b>Announce Message Caller-ID</b> | If enabled, the caller ID of the user who has left the message will be announced at the beginning of the voicemail message. The default setting is "No".   |
| <b>Announce Message Duration</b>  | If enabled, the message duration will be announced at the beginning of the voicemail message. The default setting is "No".   |



|                          |   |
|--------------------------|---|
| <b>Play Envelope</b>     | If enabled, a brief introduction (received time, received from, and etc) of each message will be played when accessed from the voicemail application. The default setting is "Yes". |
| <b>Play from Last</b>    | If enabled, UCM will play from the voice message left most recently; if disabled, UCM will play from the earliest left voice message  |
| <b>Allow User Review</b> | If enabled, users can review the message following the IVR before sending the message out. The default setting is "No".   |

## Access Voicemail

If the voicemail is enabled for UCM6200 extensions, the users can dial the voicemail access feature code (by default \*98 or \*97) to access the extension's voicemail. The users will be prompt to enter the voicemail password and then can enter digits from the phone keypad to navigate in the IVR menu for different options.

**Table 68: Voicemail IVR Menu**

| Main Menu                 | Sub Menu 1                              | Sub Menu 2                                |
|---------------------------|---|---|
| <b>1 - New messages</b>   | 3 - Advanced options                    | 1 - Send a reply                          |
|                           |   | 2 - Call the person who sent this message |
|                           |   | 3 - Hear the message envelop              |
|                           |   | 4 - Leave a message                       |
|                           |   | * - Return to the main menu               |
|                           | 5 - Repeat the current message          |   |
|                           | 7 - Delete this message                 |   |
|                           | 8 - Forward the message to another user |   |
|                           | 9 - Save                                |   |
|                           | * - Help                                |   |
| # - Exit                  |   |   |
| <b>2 - Change folders</b> | 0 - New messages                        |   |
|                           | 1 - Old messages                        |   |
|                           | 2 - Work messages                       |   |
|                           | 3 - Family messages                     |   |
|                           | 4 - Friend messages                     |   |
|                           | # - Cancel                              |   |
| <b>3 - Advanced</b>       | 1 - Send a reply                        |   |



|                             |   |                            |
|-----------------------------|---|----------------------------|
| <b>options</b>              | 2 - Call the person who sent this message |                            |
|                             | 3 - Hear the message envelop              |                            |
|                             | 4 - Leave a message                       |                            |
|                             | * - Return to the main menu               |                            |
| <b>0 - Mailbox options</b>  | 1 - Record your unavailable message       | 1 - Accept this recording  |
|                             |   | 2 - Listen to it           |
|                             |   | 3 - Re-record your message |
|                             | 2 - Record your busy message              | 1 - Accept this recording  |
|                             |   | 2 - Listen to it           |
|                             |   | 3 - Re-record your message |
|                             | 3 - Record your name                      | 1 - Accept this recording  |
|                             |   | 2 - Listen to it           |
|                             |   | 3 - Re-record your message |
|                             | 4 - Record temporary greeting             | 1 - Accept this recording  |
|                             |   | 2 - Listen to it           |
|                             |   | 3 - Re-record your message |
|                             | 5 - Change your password                  |                            |
| * - Return to the main menu |   |                            |

## Voicemail Email Settings


The UCM6200 can be configured to send the voicemail as attachment to Email. Click on "Voicemail Email Settings" button to configure the Email attributes and content.

**Table 69: Voicemail Email Settings**

|                                      |   |
|--------------------------------------|---|
| <b>Attach Recordings to E-Mail</b>   | If enabled, voicemails will be sent to user's Email address. The default setting is "Yes".  |
| <b>Keep Recordings</b>               | If enabled, voicemail will be stored in the UCM6200 after the email is sent. The default setting is "Yes".  |
| <b>Template For Voicemail Emails</b> | <p>Fill in the "Subject:" and "Message:" content, to be used in the Email when sending to the user.</p> <p>The template variables are:</p> <ul style="list-style-type: none"> <li>• \t: TAB</li> <li>• \${VM_NAME}: Recipient's first name and last name</li> <li>• \${VM_DUR}: The duration of the voicemail message</li> <li>• \${VM_MAILBOX}: The recipient's extension</li> </ul> |



- `{VM_CALLERID}`: The caller ID of the person who has left the message
- `{VM_MSGNUM}`: The number of messages in the mailbox
- `{VM_DATE}`: The date and time when the message is left

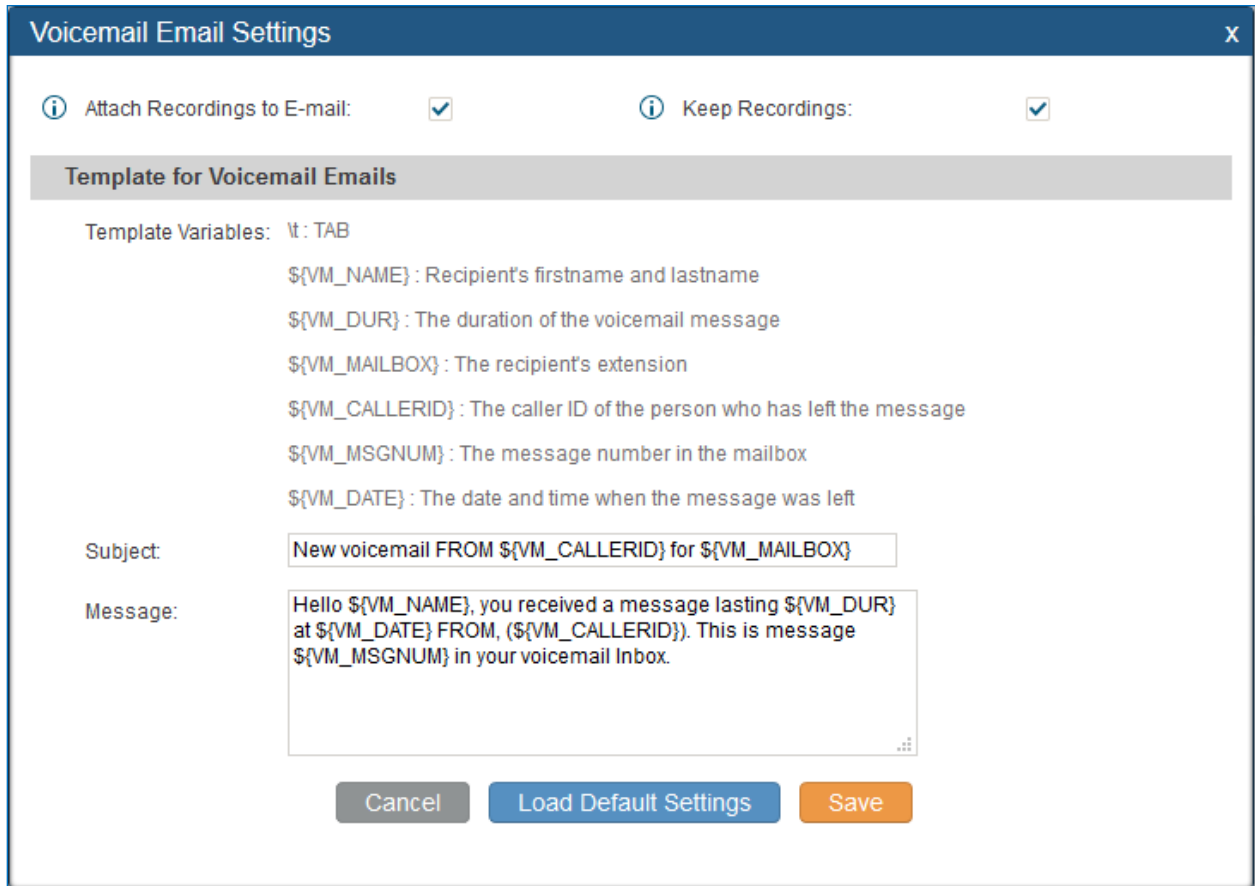

**Voicemail Email Settings** X

Attach Recordings to E-mail:     
  Keep Recordings:

**Template for Voicemail Emails**

Template Variables: `\t` : TAB

- `{VM_NAME}` : Recipient's firstname and lastname
- `{VM_DUR}` : The duration of the voicemail message
- `{VM_MAILBOX}` : The recipient's extension
- `{VM_CALLERID}` : The caller ID of the person who has left the message
- `{VM_MSGNUM}` : The message number in the mailbox
- `{VM_DATE}` : The date and time when the message was left

Subject:

Message:


**Figure 133: Voicemail Email Settings**

Click on "Load Default Settings" button to view the default template as an example.

## Configure Voicemail Group

The UCM6200 supports voicemail group and all the extensions added in the group will receive the voicemail to the group extension. The voicemail group can be configured under Web GUI->**PBX**->**Call Features**->**Voicemail Group**. Click on "Create New Voicemail Group" to configure the group.



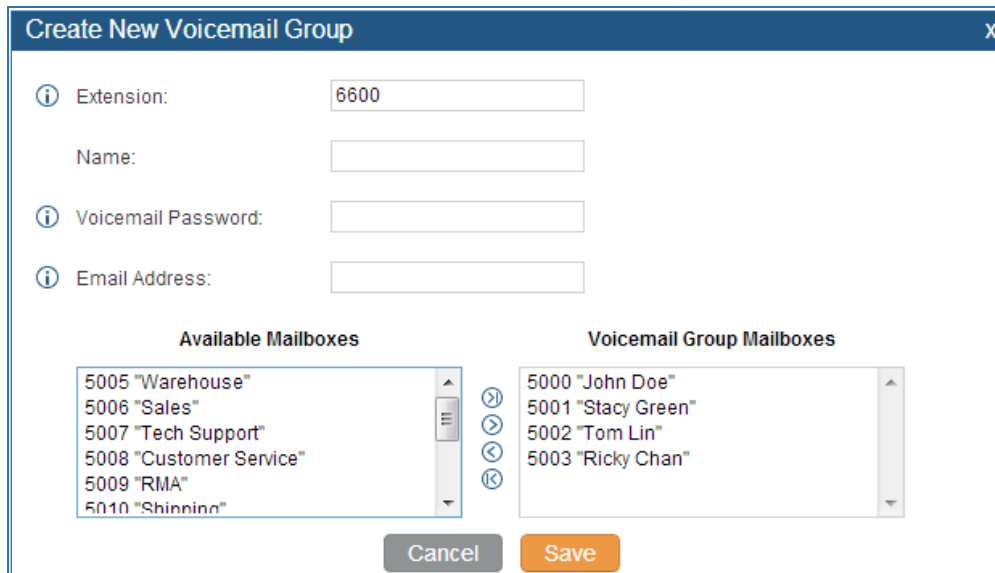

**Figure 134: Voicemail Group**

**Table 70: Voicemail Group Settings**

|                                  |   |
|----------------------------------|---|
| <b>Extension</b>                 | Enter the Voicemail Group Extension. The voicemail messages left to this extension will be forwarded to all the voicemail group members.                              |
| <b>Name</b>                      | Configure the Name to identify the voicemail group. Letters, digits, _ and - are allowed.   |
| <b>Voicemail Password</b>        | Configure the voicemail password for the users to check voicemail messages.   |
| <b>Email Address</b>             | Configure the Email address for the voicemail group extension.  |
| <b>Voicemail Group Mailboxes</b> | Select available mailboxes from the left list and add them to the right list. The extensions need to have voicemail enabled to be listed in available mailboxes list. |





## RING GROUP

The UCM6200 supports ring group feature with different ring strategies applied to the ring group members. This section describes the ring group configuration on the UCM6200.

### Configure Ring Group

Ring group settings can be accessed via Web GUI->**PBX->Call Features->Ring Group**.



| Create New Ring Group |                 |                  |   |
|-----------------------|-----------------|------------------|---|
| Extension             | Ring Group Name | Members          | Options   |
| 6400                  | techsupport     | 6005, 6006, 6007 |   |

Figure 135: Ring Group











- Click on “Create New Ring Group” to add ring group.
- Click on  to edit the ring group. The following table shows the ring group configuration parameters.
- Click on  to delete the ring group.

Table 71: Ring Group Parameters

|                              |   |
|------------------------------|---|
| <b>Ring Group Name</b>       | Configure ring group name to identify the ring group. Letters, digits, _ and – are allowed.   |
| <b>Extension</b>             | Configure the ring group extension.   |
| <b>Ring Group Members</b>    | Select available users from the left side to the ring group member list on the right side. Click on     to arrange the order.   |
| <b>Selected LDAP Numbers</b> | Select available remote users from the left side to the ring group member list on the right side. Click on     to arrange the order. Note: LDAP Sync must be enabled first.      |
| <b>Ring Strategy</b>         | Select the ring strategy. The default setting is “Ring in order”. <ul style="list-style-type: none"> <li>• Ring simultaneously.<br/>Ring all the members at the same time when there is incoming call to the ring group extension. If any of the member answers the call, it will stop ringing.</li> <li>• Ring in order.<br/>Ring the members with the order configured in ring group list. If the first member doesn’t answer the call, it will stop ringing the first member and start ringing the second member.</li> </ul> |
| <b>Music On Hold</b>         | Select the “Music On Hold” Class of this Ring Group, “Music On Hold” can be   |



|                                    |  |
|------------------------------------|--|
|                                    | managed from the “Music On Hold” panel on the left.  |
| <b>Custom Prompt</b>               | This option is to set a custom prompt for a ring group to announce to caller. Click on ‘Prompt’, it will direct to the page <b>PBX-&gt;Internal Options-&gt;Custom Prompt</b> , where users could record new prompt or upload prompt files.                        |
| <b>Ring Timeout on Each Member</b> | Configure the number of seconds to ring each member. If set to 0, it will keep ringing. The default setting is 30 seconds.<br><b>Note:</b><br>The actual ring timeout might be overridden by users if the phone has ring timeout settings as well.                 |
| <b>Auto Record</b>                 | If enabled, calls on this ring group will be automatically recorded. The default setting is No. The recording files can be accessed from web GUI-> <b>CDR-&gt;Recording Files</b> .  |
| <b>Replace Caller ID</b>           | If enabled, the UCM will replace the caller display name with the Ring Group name the caller know whether the call is incoming from a direct extension or a Ring Group.  |
| <b>Enable Destination</b>          | If enabled, users could select extension, voicemail, ring group, IVR, call queue, voicemail group as the destination if the call to the ring group has no answer. Secret and Email address are required if voicemail is selected as the destination.               |
| <b>Secret</b>                      | Configure the password to access the ring group extension's voicemail.<br><b>Note:</b><br>The password has to be at least 4 characters.  |
| <b>Email Address</b>               | Configure the Email address of the ring group extension's voicemail. If "Attach Recordings to E-mail" is enabled from Web GUI-> <b>PBX-&gt;Voicemail-&gt;Voicemail Email Settings</b> , the voicemail can be sent to the ring group's Email address as attachment. |











Figure 136: Ring Group Configuration

## Remote Extension in Ring Group

Remote extensions from the peer trunk of a remote UCM6200 can be included in the ring group with local extension. An example of Ring Group with peer extensions is presented in the following:

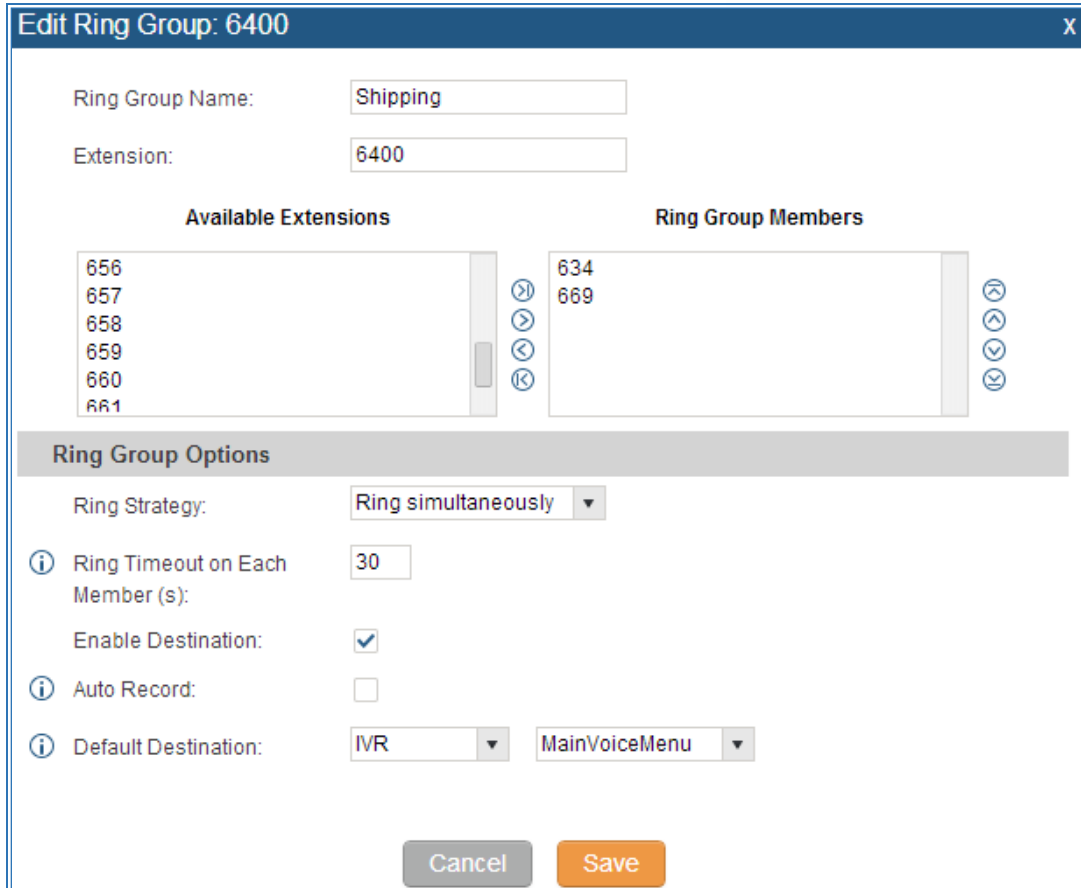1. Creating SIP Peer Trunk between both UCM6200\_A and UCM6200\_B. **SIP Trunk** can be found under web **UI-> PBX-> Basic/Call Routes-> VoIP Trunks**. Also, please configure their Inbound/Outbound routes accordingly.



2. Click edit button in the menu    , and check if **Sync LDAP Enable** is selected, this option will allow UCM6200\_A update remote LDAP server automatically from peer UCM6200\_B. In addition, **Sync LDAP Password** must match for UCM6200\_A and UCM6200\_B in order to sync LDAP contact automatically. Port number can be anything between 0~65535, and use the outbound rule created in step 1 for the **LDAP Outbound Rule** option.



**Edit SIP Trunk: Test\_Ringgroup**

Basic Settings | **Advanced Settings**

**Codec Preference:**

| Available Codecs | Selected Codecs |
|------------------|-----------------|
| iLBC             | PCMU            |
| G.722            | PCMA            |
| AAL2-G.726-32    | GSM             |
| ADPCM            | G.726           |
| G.723            | G.729           |

**DID Mode:** Request-line

**DTMF Mode:** Default

**Enable Qualify:**

**Qualify Timeout:** 1000

**Qualify Frequency:** 60

**The maximum number of call lines:** 0

**Fax Mode:** None

**S RTP:**

**Sync LDAP Enable:**

**Sync LDAP Password:** admin1

**Sync LDAP Port:** 36789

**LDAP Outbound Rule:** Test\_Ringgroup

**LDAP Dialed Prefix:**

**LDAP Last Sync Date:** 2015-03-23T15:14:54-0700

Cancel Save


**Figure 137: Sync LDAP Server option**

- In case if LDAP server doesn't sync automatically, user can manually sync LDAP server. Under **VoIP Trunks** page, click sync button shown in the following figure to manually sync LDAP contacts from peer UCM6200.

PBX >> Basic/Call Routes >> VoIP Trunks

**VoIP Trunks**

Create New SIP Trunk Create New IAX Trunk

| Provider Name  | Technology | Type | Hostname/IP    | Username | Options   |
|----------------|------------|------|----------------|----------|---|
| Test_Ringgroup | SIP        | peer | 192.168.40.128 |          |  |

**Figure 138: Manually Sync LDAP Server**



4. Under **Ring Groups** setting page, click Create New Ring Group. **Ring Groups** can be found under web **UI-> PBX-> Call Features-> Ring Groups**.
5. If LDAP server is synced correctly, **Available LDAP Numbers** box will display available remote extensions that can be included in the current ring group. Please also make sure the extensions in the peer UCM6200 can be included into that UCM6200's LDAP contact.

**Edit Ring Group: 6402**

Ring Group Name:

Extension:

**Available Extensions/Extension Groups**

- 1000 "jingya tan"
- 1003 "Test TestH"
- 1004 "Test"
- 1005 "UCM\_FAKE\_PEER"
- 3000 "Grandstream Test"
- 3001 "UCM\_PEER\_144"

**Available LDAP Numbers**

- 1002(ou=Test\_1)
- 2000(ou=Test\_1)
- 1010(ou=Test\_Ringgroup)
- 1011(ou=Test\_Ringgroup)
- 5000(ou=Test\_Ringgroup)
- 5002(ou=Test\_Ringgroup)

**Ring Group Members**

- 1001 "Emily"

**Selected LDAP Numbers**

- 5001(ou=Test\_Ringgroup)

**Ring Group Options**

Ring Strategy:

Permission:

Custom Prompt:  [Prompt](#)

Ring Timeout on Each Member (s):

Auto Record:

**Figure 139: Ring Group Remote Extension**



## PAGING AND INTERCOM GROUP

Paging and Intercom Group can be used to make an announcement over the speaker on a group of phones. Targeted phones will answer immediately using speaker. The UCM6200 paging and intercom can be used via feature code to a single extension or a paging/intercom group. This sections describes the configuration of paging/intercom group under Web GUI->**PBX->Call Features->Paging/Intercom**.

### Configure Paging/Intercom Group

- Click on "Create New Paging/Intercom Group" to add paging/intercom group.

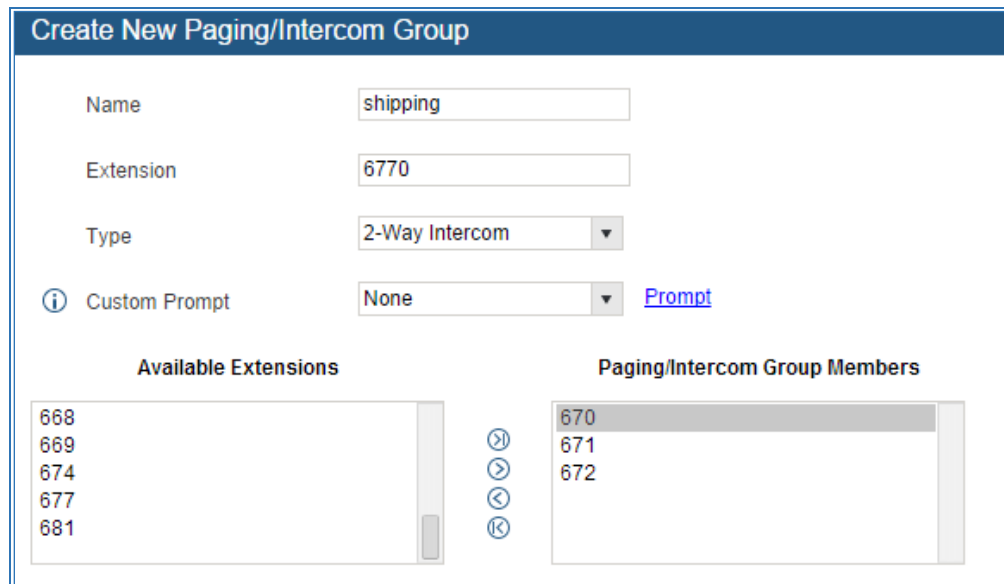





Figure 140: Paging/Intercom Group

Table 72: Paging/Intercom Group Configuration Parameters

|                                    |  |
|------------------------------------|--|
| <b>Name</b>                        | Configure paging/intercom group name.  |
| <b>Extension</b>                   | Configure the paging/intercom group extension.   |
| <b>Type</b>                        | Select "2-way Intercom" or "1-way Page".   |
| <b>Custom Prompt</b>               | This option is to set a custom prompt for a paging/intercom group to announce to caller. Click on 'Prompt', it will direct to the page <b>PBX-&gt;Internal Options-&gt;Custom Prompt</b> , where users could record new prompt or upload prompt files. |
| <b>Page/Intercom Group Members</b> | Select available users from the left side to the paging/intercom group member list on the right.   |



- Click on  to edit the paging/intercom group.
- Click on  to delete the paging/intercom group.
- Click on "Paging/Intercom Group Settings" to edit Alert-Info Header. This header will be included in the SIP INVITE message sent to the callee in paging/intercom call.

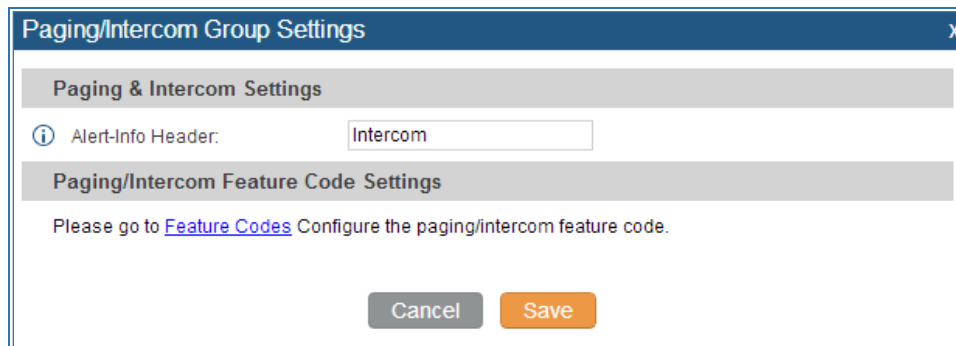

**Figure 141: Page/Intercom Group Settings**

- The UCM6200 has pre-configured paging/intercom feature code. By default, the Paging Prefix is \*81 and the Intercom Prefix is \*80. To edit page/intercom feature code, click on "Feature Codes" in the "Paging/Intercom Group Settings" dialog. Or users could go to Web GUI->**PBX->Internal Options->Feature Codes** directly.




## CALL QUEUE

The UCM6200 supports call queue by using static agents or dynamic agents. Call Queue system can accept more calls than the available agents. Incoming calls will be held until next representative is available in the system. This section describes the configuration of call queue under Web GUI->**PBX->Call Features->Call Queue**.

### Configure Call Queue

Call queue settings can be accessed via Web GUI->**PBX->Call Features->Call Queue**.

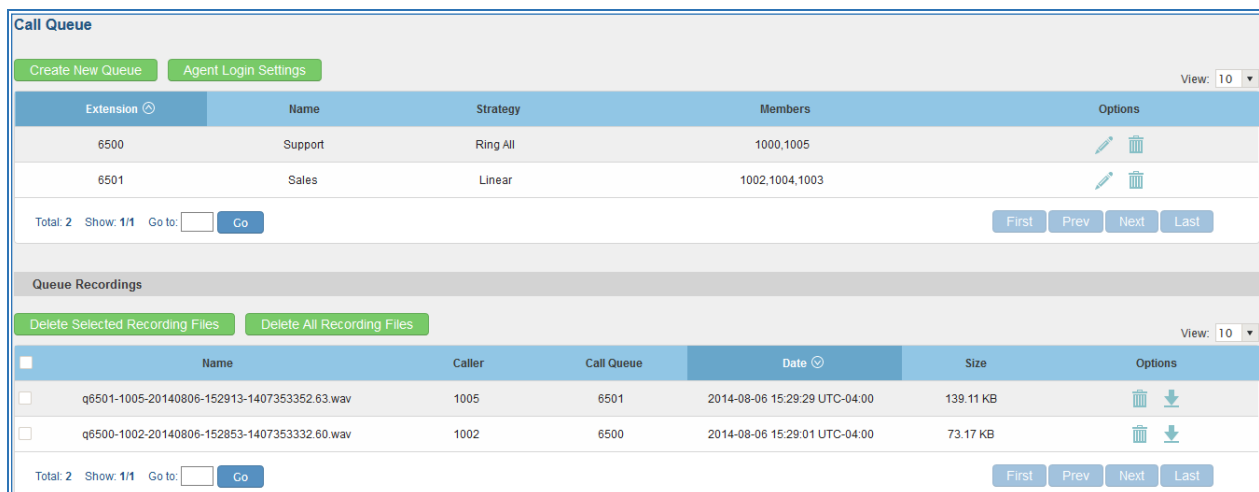


The screenshot displays the 'Call Queue' configuration page. At the top, there are buttons for 'Create New Queue' and 'Agent Login Settings'. Below this is a table with columns: Extension, Name, Strategy, Members, and Options. Two queues are listed: 'Support' (Extension 6500, Strategy Ring All, Members 1000,1005) and 'Sales' (Extension 6501, Strategy Linear, Members 1002,1004,1003). Below the table are pagination controls and buttons for 'First', 'Prev', 'Next', and 'Last'. A section titled 'Queue Recordings' contains buttons for 'Delete Selected Recording Files' and 'Delete All Recording Files'. Below this is another table with columns: Name, Caller, Call Queue, Date, Size, and Options. Two recording files are listed with their respective details. Similar pagination and navigation controls are present at the bottom of the recordings section.

**Figure 142: Call Queue**

UCM6200 supports custom prompt feature in call queue. This custom prompt will active after the caller waits for a period of time in the Queue. Then caller could choose to leave a message/ transfer to default extension or keep waiting in the queue.

To configure this feature, please go to UCM web UI-> PBX-> Call Features-> Call Queue-> Create New Queue/Edit Queue-> Queue Options-> set Enable Destination to Enter Destination with Voice Prompt. Users could configure the wait time with Voice Prompt Cycle.

- Click on "Create New Queue" to add call queue.
- Click on  to edit the call queue. The call queue configuration parameters are listed in the table below.

**Table 73: Call Queue Configuration Parameters**

|                  |                                     |
|------------------|-------------------------------------|
| <b>Extension</b> | Configure the call queue extension. |
|------------------|-------------------------------------|





|                               |   |
|-------------------------------|---|
| <b>Name</b>                   | Configure the call queue name to identify the call queue.   |
| <b>Strategy</b>               | <p>Select the strategy for the call queue.</p> <ul style="list-style-type: none"> <li>• Ring All<br/>Ring all available Agents simultaneously until one answers.</li> <li>• Linear<br/>Ring agents in the specified order.</li> <li>• Least Recent<br/>Ring the agent who has been called the least recently.</li> <li>• Fewest Calls<br/>Ring the agent with the fewest completed calls.</li> <li>• Random<br/>Ring a random agent.</li> <li>• Round Robin<br/>Ring the agents in Round Robin scheduling with memory.</li> </ul> <p>The default setting is "Ring All".</p> |
| <b>Music On Hold</b>          | <p>Select the Music On Hold class for the call queue.</p> <p><b>Note:</b><br/>Music On Hold classes can be managed from Web GUI-&gt; <b>PBX-&gt;Internal Options-&gt;Music On Hold.</b></p>   |
| <b>Leave When Empty</b>       | <p>Configure whether the callers will be disconnected from the queue or not if the queue has no agent anymore. The default setting is "Strict".</p> <ul style="list-style-type: none"> <li>• Yes<br/>Callers will be disconnected from the queue if all agents are paused or invalid.</li> <li>• No<br/>Never disconnect the callers from the queue when the queue is empty.</li> <li>• Strict<br/>Callers will be disconnected from the queue if all agents are paused, invalid or unavailable.</li> </ul>   |
| <b>Dial in Empty Queue</b>    | <p>Configure whether the callers can dial into a call queue if the queue has no agent. The default setting is "No".</p> <ul style="list-style-type: none"> <li>• Yes<br/>Callers can always dial into a call queue.</li> <li>• No<br/>Callers cannot dial into a queue if all agents are paused or invalid.</li> <li>• Strict<br/>Callers cannot dial into a queue if the agents are paused, invalid or unavailable.</li> </ul>   |
| <b>Dynamic Login Password</b> | If enabled, the configured PIN number is required for dynamic agent to log in. The default setting is disabled.   |
| <b>Replace Caller ID</b>      | If enabled, the UCM will replace the caller display name with the Call Queue name   |




|                             |   |
|-----------------------------|---|
|                             | the caller know whether the call is incoming from a direct extension or a Call Queue.   |
| <b>Ring Time Out</b>        | Configure the number of seconds an agent will ring before the call goes to the next agent. The default setting is 15 seconds.   |
| <b>Wrapup Time</b>          | Configure the number of seconds before a new call can ring the queue after the last call on the agent is completed. If set to 0, there will be no delay between calls to the queue. The default setting is 15 seconds.  |
| <b>Retry Time</b>           | Configure the number of seconds to wait before ringing the next agent.  |
| <b>Max Queue Length</b>     | Configure the maximum number of calls to be queued at once. This number does not include calls that have been connected with agents. It only includes calls not connected yet. The default setting is 0, which means unlimited. When the maximum value is reached, the caller will be treated with busy tone followed by the next calling rule after attempting to enter the queue.   |
| <b>Report Hold Time</b>     | If enabled, the UCM6200 will report (to the agent) the duration of time of the call before the caller is connected to the agent. The default setting is "No".   |
| <b>Wait Time</b>            | If enabled, users will be disconnected after the configured number of seconds. The default setting is "No".<br><b>Note:</b> It is recommended to configure "Wait Time" longer than the "Wrapup Time".   |
| <b>Auto Record</b>          | If enabled, the calls on the call queue will be automatically recorded. The recording files can be accessed in Queue Recordings under web GUI-> <b>PBX-&gt;Call Features-&gt;Call Queue</b> .   |
| <b>Enable Destination</b>   | If enabled, the incoming call for the call queue will be routed to the destination configured in the next field if none of the agents answers the call after ringing for a time of "Ring Timeout".  |
| <b>Queue Timeout</b>        | Configure the global timeout (in seconds) of call queue. It must be bigger than the value of ring timeout. The call in the queue will be transferred to the failover destination directly if this time is exceeded.   |
| <b>Failover Destination</b> | Configure the call destination for the call to be routed to if no agent in this call queue answers the call.  |
| <b>Alert-Info</b>           | Configure the call destination for the call to be routed to if no agent in this call queue answers the call.  |
| <b>Enable Feature Codes</b> | Enable feature codes option for call queue. For example, *83 is used for "Agent Pause"  |
| <b>Agents</b>               | Select the available users to be the static agents in the call queue. Choose from the available users on the left to the static agents list on the right. Click on  <br>  to arrange the order. |

Click on  to delete the call queue.



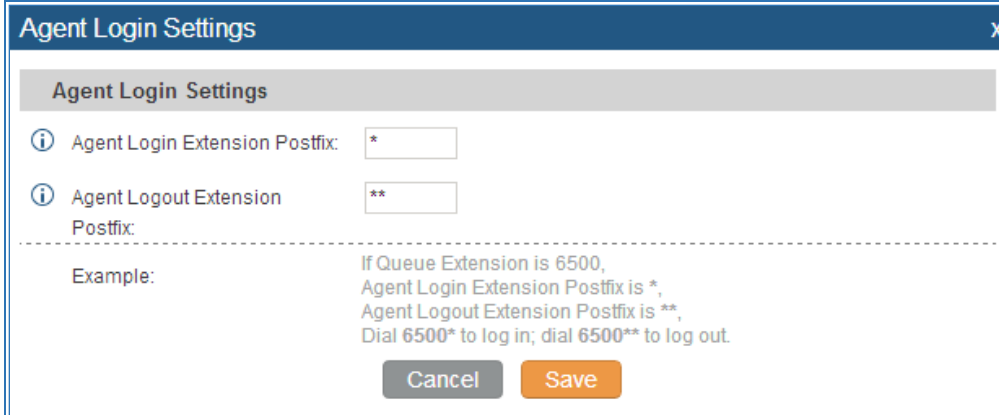

- Click on "Agent Login Settings" to configure Agent Login Extension Postfix and Agent Logout Extension Postfix. Once configured, users could log in the call queue as dynamic agent.



**Figure 143: Agent Login Settings**

For example, if the call queue extension is 6500, Agent Login Extension Postfix is \* and Agent Logout Extension Postfix is \*\*, users could dial 6500\* to login to the call queue as dynamic agent and dial 6500\*\* to logout from the call queue. Dynamic agent doesn't need to be listed as static agent and can log in/logout at any time.

- Call queue feature code "Agent Pause" and "Agent Unpause" can be configured under Web GUI->**PBX->Internal Options->Feature Codes**. The default feature code is \*83 for "Agent Pause" and \*84 for "Agent Unpause".
- Queue recordings are shown on the Call Queue page. Click on  to download the recording file in .wav format; click on  to delete the recording file. To delete multiple recording files by one click, select several recording files to be deleted and click on "Delete Selected Recording Files" or click on "Delete All Recording Files" to delete all recording files.




## EXTENSION GROUPS

The UCM6200 extension group feature allows users to assign and categorize extensions in different groups to better manage the configurations on the UCM6200. For example, when configuring "Enable Filter on Source Caller ID", users could select a group instead of each person's extension to assign. This feature simplifies the configuration process and helps manage and categorize the extensions for business environment.

### Configure Extension Groups

Extension group can be configured via Web GUI->**PBX**->**Call Features**->**Extension Groups**.

- Click on "Create New Extension Group" to create a new extension group.
- Click on  to edit the extension group.

Select extensions from the list on the left side to the right side.

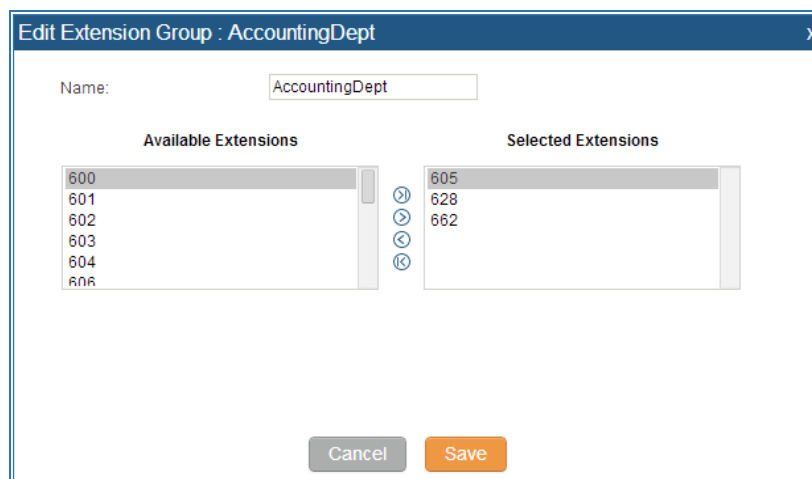


Figure 144: Edit Extension Group

- Click on  to delete the extension group.

### Using Extension Groups



Here is an example where the extension group can be used. Go to Web GUI->**PBX->Basic/Call Routes->Outbound Routes** and select "Enable Filter on Source Caller ID". Both single extensions and extension groups will show up for users to select.

**Edit Outbound Rule: usa1**

i Calling Rule Name:

i Pattern:  +

i Password:

i Privilege Level: National ▼

i Enable Filter on Source Caller ID:

Available Extensions/Extension Groups

Extension Group -- Accounting\_Dept  
 Extension Group -- Marketing\_Dept  
 Extension Group -- IT\_Dept  
 Extension Group -- Sales\_Dept  
 Extension Group -- TechSupport\_Dept

➤  
➤  
➤  
➤

Selected Extensions/Extension Groups

i Custom Dynamic Route:

**Figure 145: Select Extension Group in Outbound Route**




## PICKUP GROUPS

The UCM6200 supports pickup group feature which allows users to pick up incoming calls for other extensions if they are in the same pickup group, by dialing "Pickup Extension" feature code (by default \*8).

### Configure Pickup Groups

Pickup groups can be configured via Web GUI->**PBX->Call Features->Pickup Groups**.

- Click on "Create New Pickup Group" to create a new pickup group.
- Click on  to edit the pickup group.

Select extensions from the list on the left side to the right side.

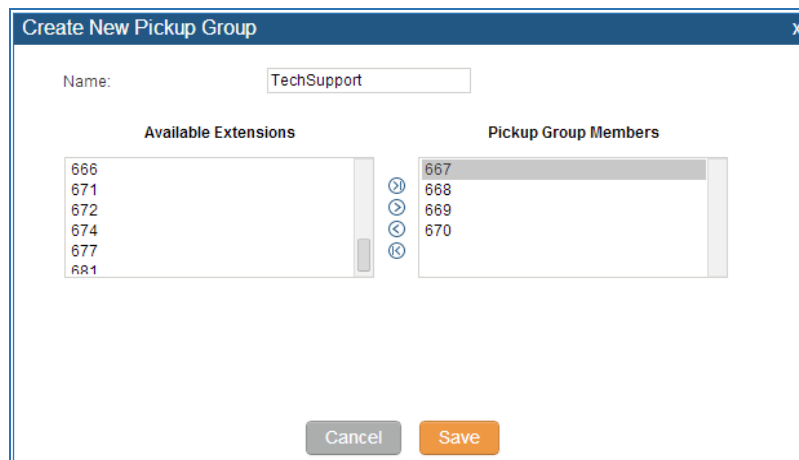


Figure 146: Edit Pickup Group

- Click on  to delete the pickup group.

### Configure Pickup Feature Code

When picking up the call for the pickup group member, the user only needs to dial the pickup feature code. It's not necessary to add the extension number after the pickup feature code. The pickup feature code is configurable under Web GUI->**PBX->Internal Options->Feature Codes**.

The default pickup feature code is \*8.



PBX >> Internal Options >> Feature Codes

Feature Code Digits Timeout: 1000      Call Park: 700

Parking Lots: 701-720      Use parkdot as extension:

Parking Timeout(s): 300

**Feature Codes**

Reset All    Default All

|                                 |                                      |
|---------------------------------|--------------------------------------|
| Voicemail Access Code: *98      | My Voicemail: *97                    |
| Agent Pause: *83                | Agent Unpause: *84                   |
| Paging Prefix: *81              | Intercom Prefix: *80                 |
| Blacklist Add: *40              | Blacklist Remove: *41                |
| Call Pickup on Ringing: **      | <b>Pickup Extension: *8</b>          |
| Direct Dial Voicemail Prefix: * | Call Completion Request: *11         |
| Call Completion Cancel: *12     | Enable Spy: <input type="checkbox"/> |
| Listen Spy: *54                 | Whisper Spy: *55                     |
| Barge Spy: *56                  |                                      |

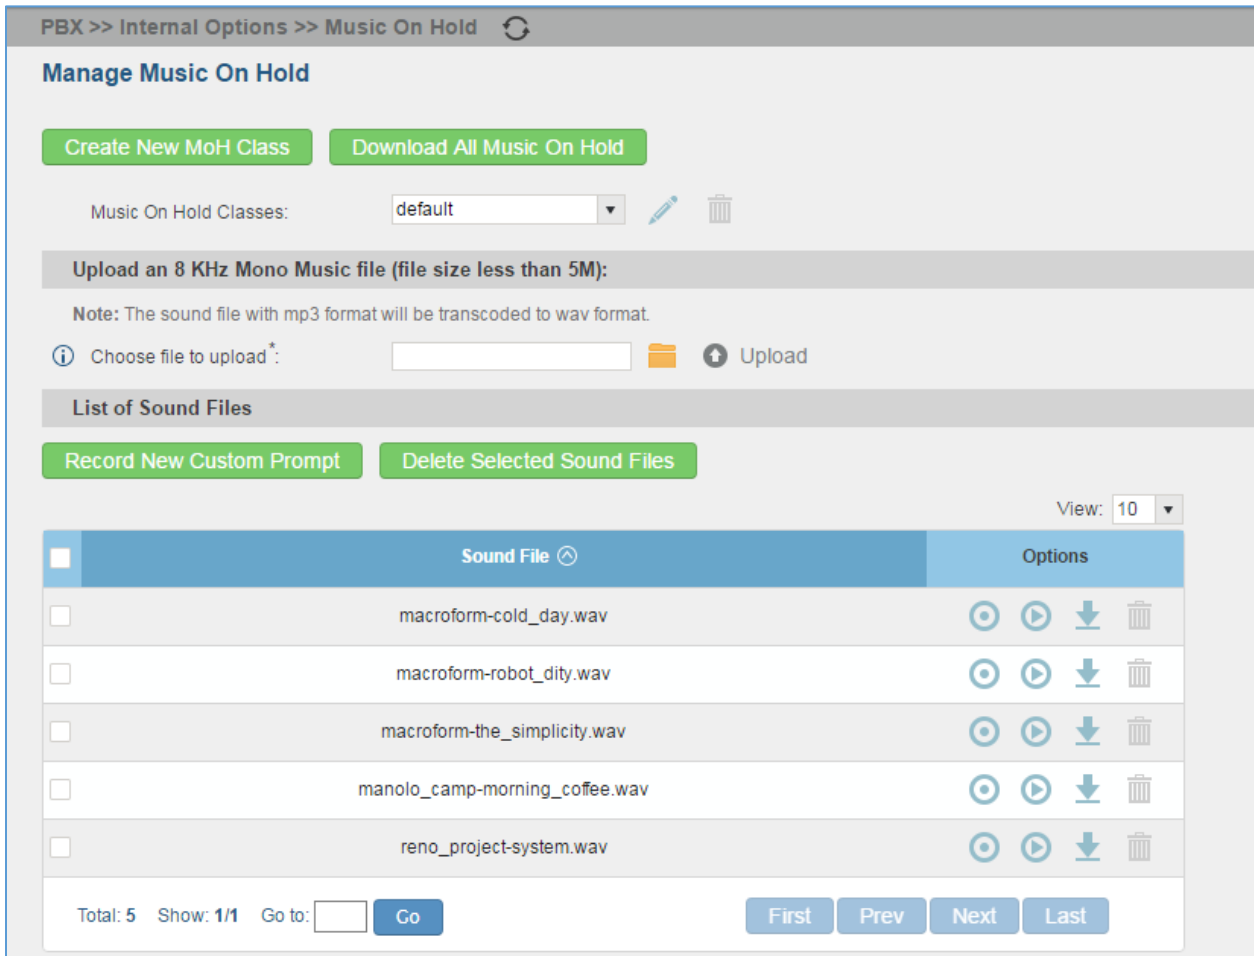
Cancel    Save

Figure 147: Edit Pickup Feature Code





## MUSIC ON HOLD

Music On Hold settings can be accessed via Web GUI->**PBX->Internal Options->Music On Hold**. In this page, users could configure music on hold class and upload music files. The "default" Music On Hold class already has 5 audio files defined for users to use.






PBX >> Internal Options >> Music On Hold

### Manage Music On Hold

Music On Hold Classes:   






















**Upload an 8 KHz Mono Music file (file size less than 5M):**

Note: The sound file with mp3 format will be transcoded to wav format.

 Choose file to upload\*:    Upload





**List of Sound Files**

View:

| <input type="checkbox"/> | Sound File  | Options   |
|--------------------------|--|---|
| <input type="checkbox"/> | macroform-cold_day.wav   |     |
| <input type="checkbox"/> | macroform-robot_dity.wav   |     |
| <input type="checkbox"/> | macroform-the_simplicity.wav   |     |
| <input type="checkbox"/> | manolo_camp-morning_coffee.wav   |     |
| <input type="checkbox"/> | reno_project-system.wav  |     |


Total: 5 Show: 1/1 Go to:

Figure 148: Music On Hold Default Class

- Click on "Create New MOH Class" to add a new Music On Hold class.
- Click on  to configure the MOH class sort method to be "Alpha" or "Random" for the sound files.
- Click on  next to the selected Music On Hold class to delete this Music On Hold class.
- Click on  to select music file from local PC and click on  to start uploading. Users can upload:
  - Single files with 8KHz Mono Music file, or






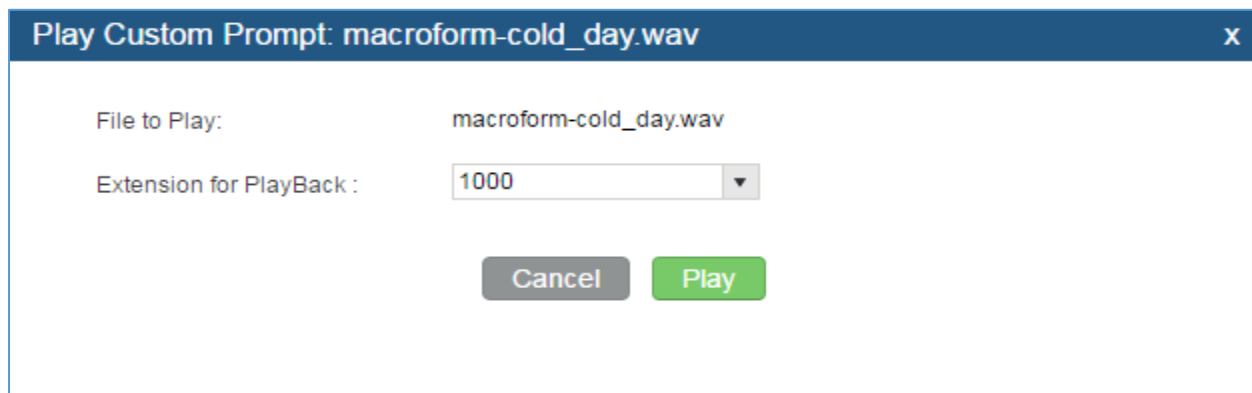
- Music on hold files in a compressed package with .tar, .tar.gz and .tgz as the suffix. The file name can only be letters, digits or special characters -\_
- the size for the uploaded file should be less than 30M, the compressed file will be applied to the entire MoH.
- Users could also download all the music on hold files from UCM. In the Music On Hold page, click on **Download All Music On Hold** and the file will be downloaded to your local PC.
- Click on  next to the sound file to delete it from the selected Music On Hold Class.
- Select the sound files and click on **Delete Selected Sound Files** to delete all selected music on hold files.

**Note:** the size for the uploaded file should be less than 30M, the compressed file will be applied to the entire MoH.

The UCM6200 allows Users to select the Music on Hold file from WebGUI to play it. The UCM6200 will initiate a call to the selected extension and play this Music on Hold file once the call is answered.

Steps to play the music on hold file:

1. Click on the  button for the Music on Hold file.
2. In the prompted window, select the extension to playback and click **Play**.



**Figure 149: Play Custom Prompt**


3. The selected extension will ring.
4. Answer the call to listen to the music playback.

Users could also record their own Music on hold to override an existing custom prompt, this can be done by following those steps:

1. Click on .




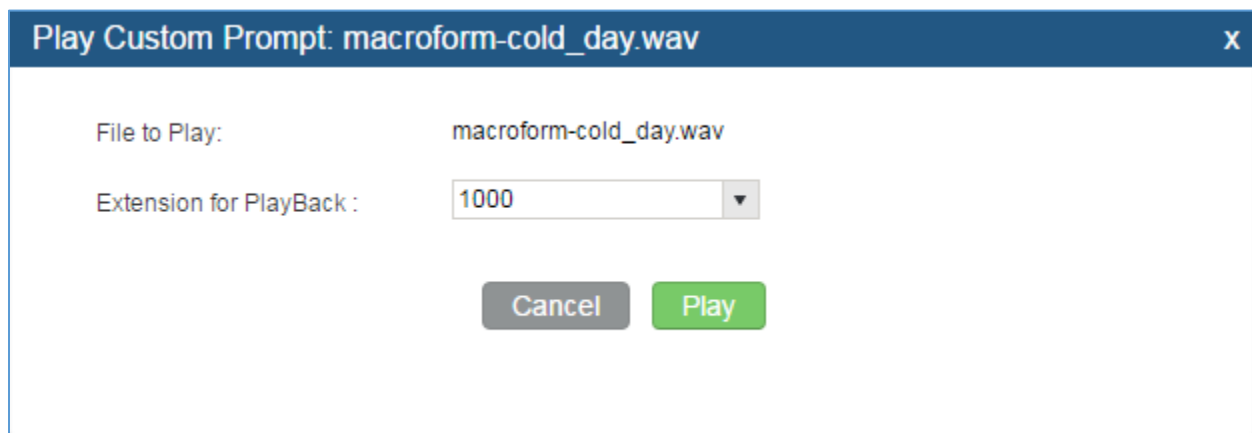
2. A prompt of confirmation will pop up, as shown below.

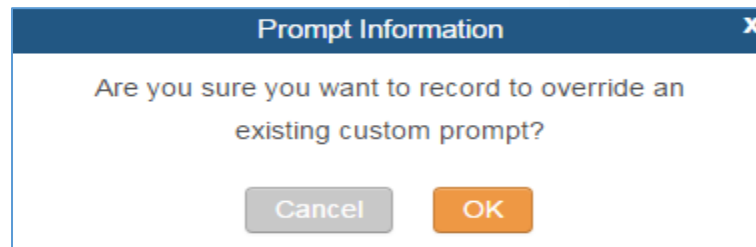

**Figure 150: Information Prompt**

3. Click .

4. In the prompted window, select the extension to playback and click .



**Figure 151: Record Custom Prompt**

5. Answer the call and start to record your new music on hold.

6. Hangup the call and refresh Music On Hold page then you can listen to the new recorded file.

---

 **Note:**

Once the MOH file is deleted, there are two ways to recover the music files.

- Users could download the MOH file from this link:  
<http://downloads.asterisk.org/pub/telephony/sounds/releases/asterisk-moh-opsound-wav-2.03.tar.gz>  
 After downloading and unzip the pack, users could then upload the music files to UCM.
  - Factory reset could also recover the MOH file on the UCM.
- 



## FAX/T.38

The UCM6200 supports T.30/T.38 Fax and Fax Pass-through. It can convert the received Fax to PDF format and send it to the configured Email address. Fax/T.38 settings can be accessed via Web GUI->**PBX->Internal Options->FAX/T.38**. The list of received Fax files will be displayed in the same web page for users to view, retrieve and delete.

### Configure Fax/T.38

- Click on "Create New Fax Extension". In the popped up window, fill the extension, name and Email address to send the received Fax to.
- Click on "Fax Settings" to configure the Fax parameters.



**Table 74: FAX/T.38 Settings**

|                                     |  |
|-------------------------------------|--|
| <b>Enable Error Correction Mode</b> | Configure to enable Error Correction Mode (ECM) for the Fax. The default setting is "Yes".   |
| <b>Maximum Transfer Rate</b>        | Configure the maximum transfer rate during the Fax rate negotiation. The possible values are 2400, 4800, 7200, 9600, 12000 and 14400. The default setting is 14400.  |
| <b>Minimum Transfer Rate</b>        | Configure the minimum transfer rate during the Fax rate negotiation. The possible values are 2400, 4800, 7200, 9600, 12000 and 14000. The default setting is 2400.   |
| <b>Max Concurrent Sending Fax</b>   | <p>Configure the concurrent fax that can be sent by UCM6200. Two mode "Only" and "More" are supported.</p> <ul style="list-style-type: none"> <li>• Only<br/>Under this mode, the UCM6200 allows only single user to send fax at a time.</li> <li>• More<br/>Under this mode, the UCM6200 supports multiple concurrent fax sending by the users.</li> </ul> <p>By default, this option is set to "only".</p> |
| <b>Fax Queue Length</b>             | Configure the maximum length of Fax Queue from 6 to 10. The default setting is 6.  |
| <b>Default Email Address</b>        | <p>Configure the Email address to send the received Fax to if user's Email address cannot be found.</p> <p><b>Note:</b><br/>The extension's Email address or the Fax's default Email address needs to be configured in order to receive Fax from Email. If neither of them is configured, Fax will be not be received from Email.</p>  |
| <b>Template Variables</b>           | Fill in the "Subject:" and "Message:" content, to be used in the Email when sending the Fax to the users.  |



The template variables are:

- `${CALLERIDNUM}` : Caller ID Number
- `${CALLERIDNAME}` : Caller ID Name
- `${RECEIVEEXTEN}` : The extension to receive the Fax
- `${FAXPAGES}` : Number of pages in the Fax
- `${VM_DATE}` : The date and time when the Fax is received

- Click on  to edit the Fax extension.
- Click on  to delete the Fax extension.


## Sample Configuration to Receive Fax from PSTN Line

The following instructions describe how to use the UCM6200 to receive Fax from PSTN line on the Fax machine connected to the UCM6200 FXS port.

1. Connect Fax machine to the UCM6200 FXS port.
2. Connect PSTN line to the UCM6200 FXO port.
3. Go to web GUI->**PBX**->**Analog Trunks** page.
4. Create or edit the analog trunk for Fax as below.

**Fax Mode:** Make sure "Fax Mode" option is set to "None".



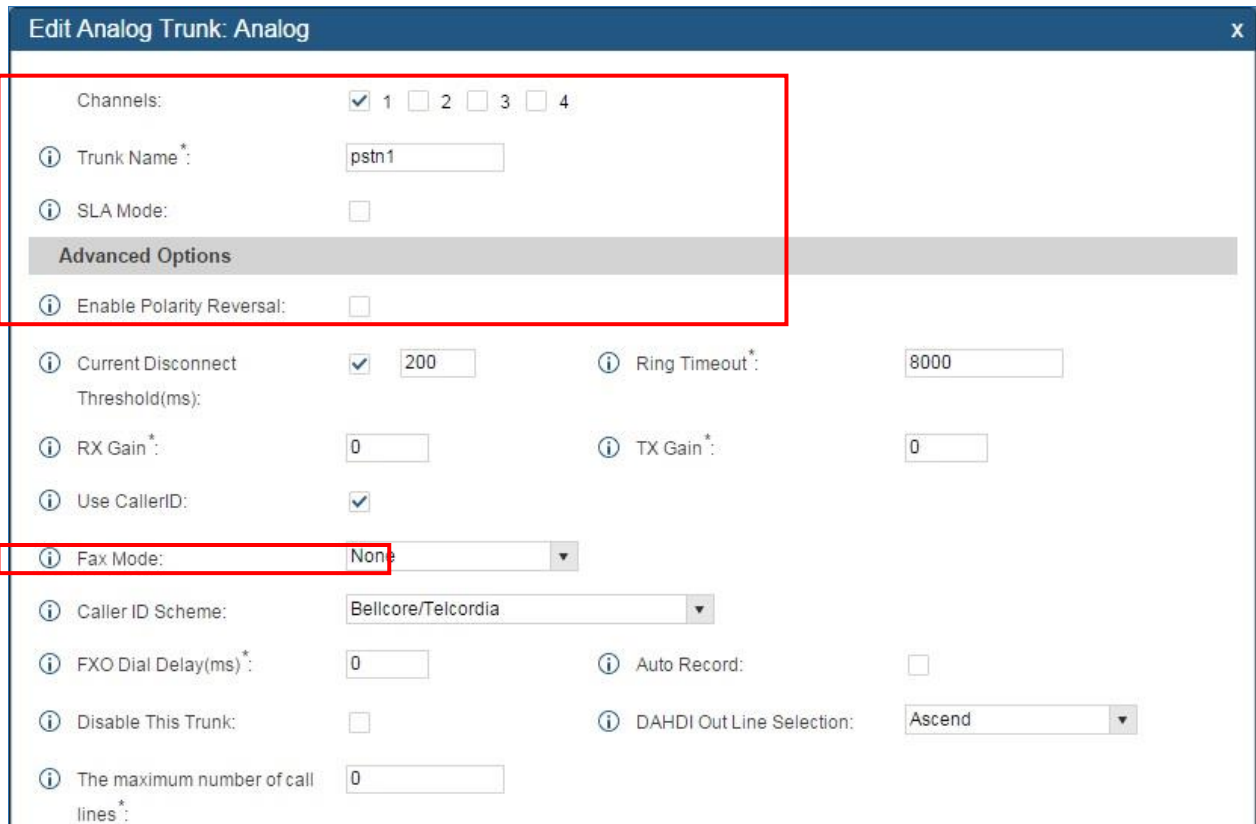

**Edit Analog Trunk: Analog**

Channels:  1  2  3  4

Trunk Name\*: pstn1

SLA Mode:

**Advanced Options**

Enable Polarity Reversal:

Current Disconnect Threshold(ms):  200

Ring Timeout\*: 8000

RX Gain\*: 0

TX Gain\*: 0

Use CallerID:

Fax Mode: None

Caller ID Scheme: Bellcore/Telcordia

FXO Dial Delay(ms)\*: 0

Auto Record:


Disable This Trunk:

DAHDI Out Line Selection: Ascend

The maximum number of call lines\*: 0

**Figure 152: Configure Analog Trunk without Fax Detection**

5. Go to UCM6200 web GUI->**PBX->Basic/Call Routes->Extensions** page.
6. Create or edit the extension for FXS port.
  - **Analog Station:** Select FXS port to be assigned to the extension. By default, it's set to "None".
  - Once selected, analog related settings for this extension will show up in "**Analog Settings**" section.

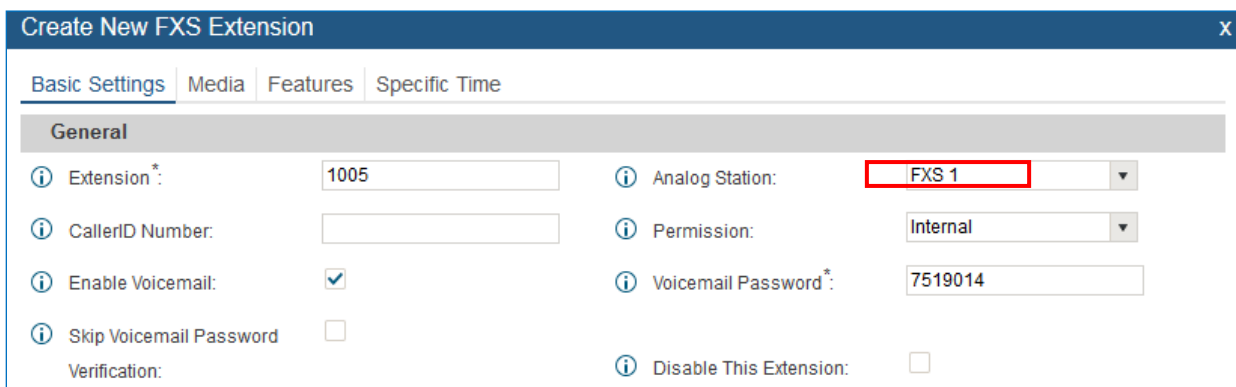

**Create New FXS Extension**

Basic Settings | Media | Features | Specific Time

**General**

Extension\*: 1005

CallerID Number:

Enable Voicemail:

Skip Voicemail Password Verification:

Analog Station: FXS 1

Permission: Internal

Voicemail Password\*: 7519014

Disable This Extension:

**Figure 153: Configure Extension for Fax Machine: FXS Extension**



**Create New FXS Extension**

Basic Settings | **Media** | Features | Specific Time

**Analog Settings**

|   |   |
|---|---|
| <input type="checkbox"/> Call Waiting:                        | <input type="checkbox"/> Use '#' as SEND:           |
| <input type="text" value="0"/> RX Gain*:                      | <input type="text" value="0"/> TX Gain*:            |
| <input type="text" value="200"/> MIN RX Flash*:               | <input type="text" value="1250"/> MAX RX Flash*:    |
| <input checked="" type="checkbox"/> Enable Polarity Reversal: | <input type="text" value="ON"/> Echo Cancellation:  |
| <input checked="" type="checkbox"/> 3-Way Calling:            | <input type="text" value="1"/> Send CallerID After: |
| <input type="text" value="None"/> Fax Mode:                   |   |

**Figure 154: Configure Extension for Fax Machine: Analog Settings**

7. Go to web GUI->**PBX->Basic/Call Routes->Inbound Routes** page.
8. Create an inbound route to use the Fax analog trunk. Select the created extension for Fax machine in step 4 as the default destination.

**Create New Inbound Rule**

Trunks\*

DID Pattern\*

Prepend Trunk Name:

Alert-Info:

Inbound Multiple Mode:

**Default Mode** | Mode 1

Default Destination\* |

| Time Condition              | Time | Destination | Options |
|-----------------------------|------|-------------|---------|
| Click to add Time Condition |      |             |         |

**Figure 155: Configure Inbound Rule for Fax**




Now the Fax configuration is done. When there is an incoming Fax calling to the PSTN number for the FXO port, it will send the Fax to the Fax machine.

## Sample Configuration for Fax-To-Email

The following instructions describe a sample configuration on how to use Fax-to-Email feature on the UCM6200.

1. Connect PSTN line to the UCM6200 FXO port.
2. Go to UCM6200 web GUI->**Internal Options**->**Fax/T.38** page. Create a new Fax extension.

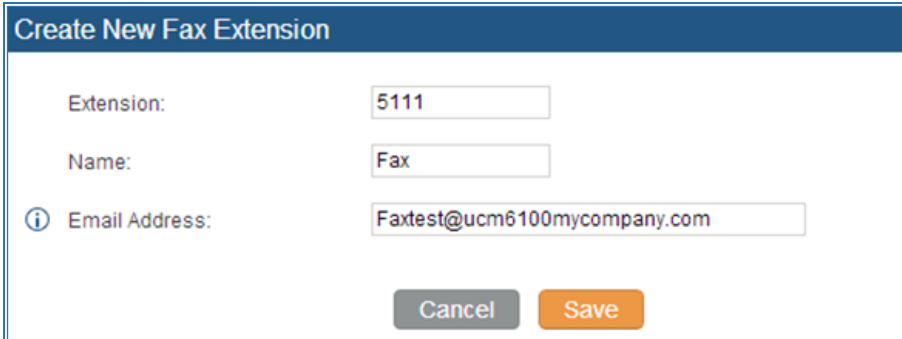


|  |   |
|--|---|
| <b>Create New Fax Extension</b>  |   |
| Extension:   | <input type="text" value="5111"/>                         |
| Name:  | <input type="text" value="Fax"/>                          |
|  Email Address: | <input type="text" value="Faxtest@ucm6100mycompany.com"/> |
| <input type="button" value="Cancel"/> <input type="button" value="Save"/>                        |   |

Figure 156: Create Fax Extension

3. Go to UCM6200 web GUI->**Basic/Call Routes**->**Analog Trunks** page. Create a new analog trunk. Please make sure "Fax Detection" is set to "No".
4. Go to UCM6200 web GUI->**Basic/Call Routes**->**Inbound Routes** page. Create a new inbound route and set the default destination to the Fax extension.



Create New Inbound Rule
X

i Trunks\*: AnalogTrunks -- FAX\_LINE

i DID Pattern\*: S /

i Prepend Trunk Name:

i Alert-Info: None

i Inbound Multiple Mode:

Default Mode | Mode 1

i Default Destination\*: Fax 5111

| Time Condition              |      |             |         |
|-----------------------------|------|-------------|---------|
| Time Condition              | Time | Destination | Options |
| Click to add Time Condition |      |             |         |

Cancel
Save

**Figure 157: Inbound Route to Fax Extension**

5. Once successfully configured, the incoming Fax from external Fax machine to the PSTN line number will be converted to PDF file and sent to the Email address **Faxtest@ucm6200mycompany.com** as attachment.





## ASTERISK MANAGER INTERFACE (RESTRICTED ACCESS)

The UCM6200 supports Asterisk Manager Interface (AMI) with restricted access. AMI allows a client program to connect to an Asterisk instance commands or read events over a TCP/IP stream. It's particularly useful when the system admin tries to track the state of a telephony client inside Asterisk.

User could configure AMI parameters on UCM6200 web GUI->**PBX->Internal Options->AMI**. For details on how to use AMI on UCM6200, please refer to the following AMI guide:

[http://www.grandstream.com/sites/default/files/Resources/UCM\\_series\\_AMI\\_guide.pdf](http://www.grandstream.com/sites/default/files/Resources/UCM_series_AMI_guide.pdf)



### **Warning:**

Please do not enable AMI on the UCM6200 if it is placed on a public or untrusted network unless you have taken steps to protect the device from unauthorized access. It is crucial to understand that AMI access can allow AMI user to originate calls and the data exchanged via AMI is often very sensitive and private for your UCM6200 system. Please be cautious when enabling AMI access on the UCM6200 and restrict the permission granted to the AMI user. By using AMI on UCM6200 you agree you understand and acknowledge the risks associated with this.

---



## BUSY CAMP-ON

The UCM6200 supports busy camp-on/call completion feature that allows the PBX to camp on a called party and inform the caller as soon as the called party becomes available given the previous attempted call has failed.

The configuration and instructions on how to use busy camp-on/call completion feature can be found in the following guide:

[http://www.grandstream.com/sites/default/files/Resources/ucm6xxx\\_busy\\_camp\\_on\\_guide.pdf](http://www.grandstream.com/sites/default/files/Resources/ucm6xxx_busy_camp_on_guide.pdf)




## FOLLOW ME

Follow Me is a feature on the UCM6200 that allows users to direct calls to other phone numbers and have them ring all at once or one after the other. Calls can be directed to users' home phone, office phone, mobile and etc. The calls will get to the user no matter where they are. Follow Me option can be found under web **GUI-> PBX-> Call Features->Follow Me.**


To configure follow me:

- Click on "Create New Follow Me" and then select an extension to be configured with Follow Me.

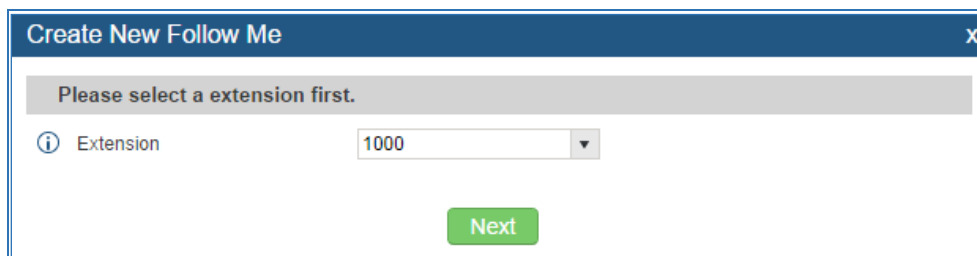



**Figure 158: Create Follow Me**

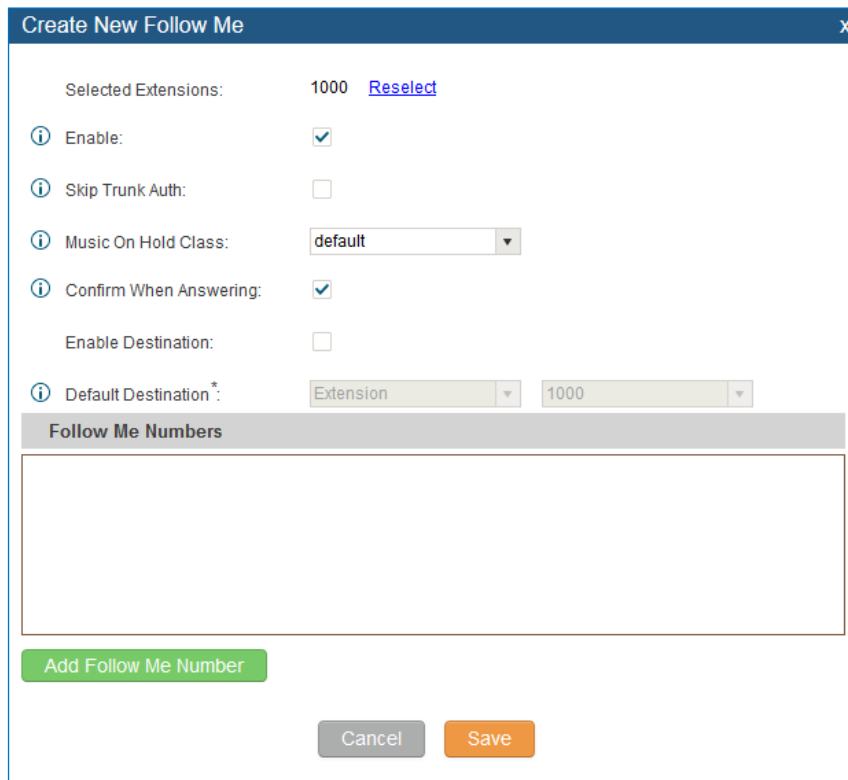- Click on "Next" to continue editing Follow Me configuration.







**Figure 159: Edit Follow Me**



- Click on “Add Follow Me Number” to add local extensions or external numbers to be called after ringing the extension selected in the first step.
- Once created, it will be displayed on the follow me web page list. Click on  to edit the Follow Me configuration. Click on  to delete the Follow Me.

The following table shows the Follow Me configuration parameters.

**Table 75: Follow Me Settings**

|                               |  |
|-------------------------------|--|
| <b>Enable</b>                 | Configure to enable or disable Follow Me for this user.  |
| <b>Skip Trunk Auth</b>        | If external number is added in the Follow Me, please make sure this option is enabled or the “Skip Trunk Auth” option of the extension is enabled, otherwise the external Follow Me number cannot be reached.  |
| <b>Music On Hold Class</b>    | Configure the Music On Hold class that the caller would hear while tracking the user.  |
| <b>Confirm When Answering</b> | By default, it is enabled and user will be asked to press 1 to accept the call or to press 2 to reject the call after answering a Follow Me call.<br>If it is disabled, the Follow Me call will be established once after the user answers it.   |
| <b>Enable Destination</b>     | When enabled, the call will be routed to the default destination if no one in the Follow Me extensions answers the call.   |
| <b>Default Destination</b>    | Configure the destination if no one in the Follow Me extensions answers the call. The available options are: <ul style="list-style-type: none"> <li>• Extension</li> <li>• Voicemail</li> <li>• Queues</li> <li>• Ring Group</li> <li>• Voicemail Group</li> <li>• IVR</li> <li>• External Number</li> </ul>   |
| <b>Follow Me Numbers</b>      | The added numbers are listed here. Click on   to arrange the order. Click on  to delete the number. Click on  to add new numbers. |
| <b>New Follow Me Number</b>   | Add a new Follow Me number which could be a ‘Local Extension’ or ‘External Number’. The selected dial plan should have permissions to dial the defined external number.  |
| <b>Dialing Order</b>          | Select the order in which the Follow Me destinations will be dialed to reach the user: ring all at once or ring one after the other.   |

- Click on “Follow Me Options” to enable or disable the options listed in the following table.



**Table 76: Follow Me Options**


|  |   |
|--|---|
| <b>Playback Incoming Status Message</b>    | If enabled, the PBX will playback the incoming status message before starting the Follow Me steps.                  |
| <b>Record the Caller's Name</b>            | If enabled, the PBX will record the caller's name from the phone so it can be announced to the callee in each step. |
| <b>Playback Unreachable Status Message</b> | If enabled, the PBX will playback the unreachable status message to the caller if the callee cannot be reached.     |



## SPEED DIAL


The UCM6200 supports One-Key Dial that allows users to call a certain destination by pressing one digit 0 to 9 on the keypad. This creates a system-wide speed dial access for all the extensions on the UCM6200.

To enable One-Key Dial, on the UCM6200 web GUI, go to page **PBX->Call Features->One-Key Dial**.

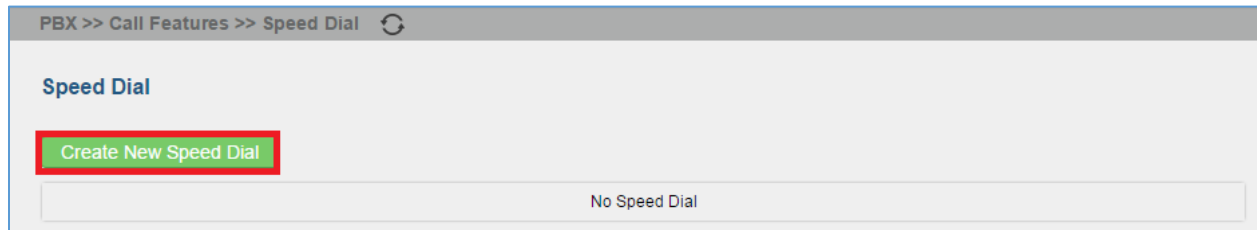

**Figure 160: Configure Speed Dial**

User should first click on **Create New Speed Dial**. Then decide a one digit or two digits used for Speed Dial and select a dial destination from “Default Destination”. The supported destinations include extension, voicemail, conference room, voicemail group, IVR, ring group, call queue, page group, fax, DISA, Dial by Name and external number.

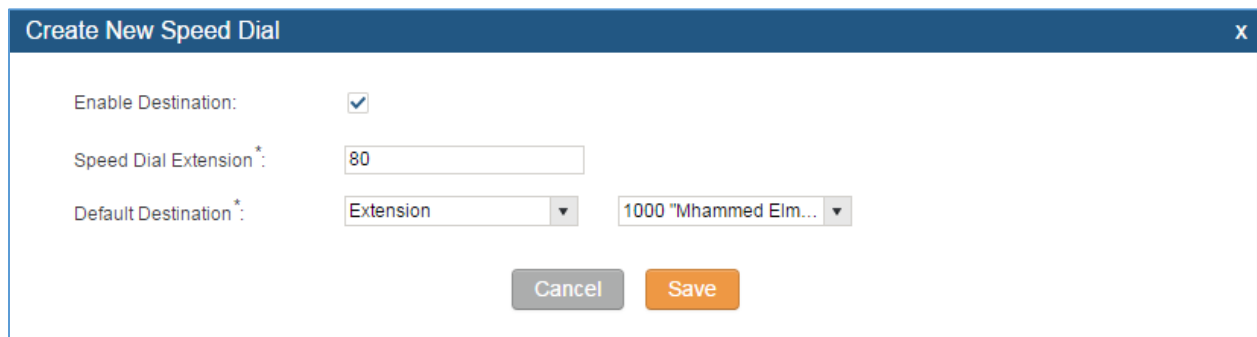



**Figure 161: Speed Dial Destinations**




## DISA

In many situations the user will find the need to access his own IP PBX resources but he is not physically near one of his extensions. However, he does have access to his own cell phone. In this case we can use what is commonly known as DISA (Direct Inward System Access). Under this scenario the user will be able to call from the outside, whether it's using his cell phone, pay phone, regular PSTN, etc. After calling into UCM6200, the user can then dial out via the SIP trunk or PSTN trunk connected to UCM6200 as it is an internal extension.

The UCM6200 supports DISA to be used in IVR or inbound route. Before using it, create new DISA under web GUI->**Call Features**->**DISA**.

- Click on "Create New IVR" to add a new DISA.
- Click on  to edit the DISA configuration.
- Click on  to delete the DISA.

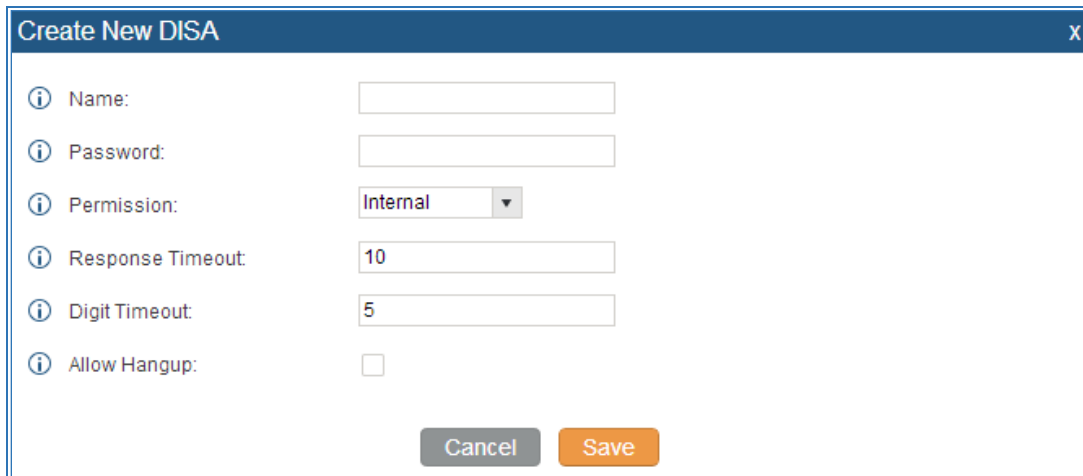

**Figure 162: Create New DISA**

**Table 77: DISA Settings**

|                   |  |
|-------------------|--|
| <b>Name</b>       | Configure DISA name to identify the DISA.  |
| <b>Password</b>   | Configure the password (digit only) required for the user to enter before using DISA to dial out.<br><br><b>Note:</b><br>The password has to be at least 4 digits.     |
| <b>Permission</b> | Configure the permission level for DISA. The available permissions are "Internal", "Local", "National" and "International" from the lowest level to the highest level. |



|                         |  |
|-------------------------|--|
|                         | The default setting is "Internal". If the user tries to dial outbound calls after dialing into the DISA, the UCM6200 will compare the DISA's permission level with the outbound route's privilege level. If the DISA's permission level is higher than (or equal to) the outbound route's privilege level, the call will be allowed to go through. |
| <b>Response Timeout</b> | Configure the maximum amount of time the UCM6200 will wait before hanging up if the user dials an incomplete or invalid number. The default setting is 10 seconds.   |
| <b>Digit Timeout</b>    | Configure the maximum amount of time permitted between digits when the user is typing the extension. The default setting is 5 seconds.   |
| <b>Allow Hangup</b>     | If enabled, during an active call, users can enter the UCM6200 hangup feature code (by default it's *0) to disconnect the call or hang up directly. A new dial tone will be heard shortly for the user to make a new call. The default setting is "No".  |

Once successfully created, users can configure the inbound route destination as "DISA" or IVR key event as "DISA". When dialing into DISA, users will be prompted with password first. After entering the correct password, a second dial tone will be heard for the users to dial out.





## CALLBACK FEATURE

Callback is mainly designed for users who often use their mobile phones to make long distance or international calls which may have high service charges. The callback feature provides an economic solution for reduce the cost from this.

The callback feature works as follows:

1. Configure a new callback on the UCM6200.
2. On the UCM6200, configure destination of the inbound route for analog trunk to callback.
3. Save and apply the settings.
4. The user calls the PSTN number of the UCM6200 using the mobile phone, which goes to callback destination as specified in the inbound route.
5. Once the user hears the ringback tone from the mobile phone, hang up the call on the mobile phone.
6. The UCM6200 will call back the user.
7. The user answers the call.
8. The call will be sent to DISA or IVR which directs the user to dial the destination number.
9. The user will be connected to the destination number.

In this way, the calls are placed and connected through trunks on the UCM6200 instead of to the mobile phone directly. Therefore, the user will not be charged on mobile phone services for long distance or international calls.

To configure callback on the UCM6200, go to web GUI->**PBX->Call Features->Callback** page and click on

Create New Callback

. Configuration parameters are listed in the following table.

**Table 78: Callback Configuration Parameters**

|                              |  |
|------------------------------|--|
| <b>Name</b>                  | Configure a name to identify the Callback.   |
| <b>CallerID Pattern</b>      | Configure the pattern of the callers allowed to use this callback. The caller who places the inbound call needs to have the callerID match this pattern so that the caller can get callback after hanging up the call.<br><b>Note:</b><br>If leaving as blank, all numbers are allowed to use this callback. |
| <b>Outbound Prepend</b>      | Configure the prepend digits to be added at before dialing the outside number. The number with prepended digits will be used to match the outbound route. '-' is the connection character which will be ignored.   |
| <b>Delay Before Callback</b> | Configure the number of seconds to be delayed before calling back the user.  |
| <b>Destination</b>           | Configure the destination which the callback will direct the caller to. Two destinations are available:  |



- IVR
- DISA

The caller can then enter the desired number to dial out via UCM6200 trunk.



## BLF AND EVENT LIST

### BLF

The UCM6200 supports BLF monitoring for extensions, ring group, call queue, conference room and parking lot. For example, on the user's phone, configure the parking lot number 701 as the BLF monitored number. When there is a parked call on 701, the LED for this BLF key will light up in red, meaning a call is parked against this parking lot. Pressing this BLF key can pick up the call from this parking lot.





**Note:**

On the Grandstream GXP series phones, the MPK supports "Call Park" mode, which can be used to park the call by configuring the MPK number as call park feature code (e.g., 700). MPK "Call Park" mode can also be used to monitor and pickup parked call if the MPK number is configured as parking lot (e.g., 701).

---

### Event List

Besides BLF, users can also configure the phones to monitor event list. In this way, both local extensions on the same UCM6200 and remote extensions on the VOIP trunk can be monitored. The event list setting is under web GUI->**Call Features**->**Event List**.

- Click on "Create New Event List" to add a new event list.
- Sort selected extensions manually in the Eventlist
- Click on  to edit the event list configuration.
- Click on  to delete the event list.

**Table 79: Event List Settings**

|                          |  |
|--------------------------|--|
| <b>URI</b>               | Configure the name of this event list (for example, office_event_list). Please note the URI name cannot be the same as the extension name on the UCM6200. The valid characters are letters, digits, _ and -. |
| <b>Local Extensions</b>  | Select the available extensions/Extension Groups listed on the local UCM6200 to be monitored in the event list.  |
| <b>Remote Extensions</b> | If LDAP sync is enabled between the UCM6200 and the peer UCM6200, the remote extensions will be listed under "Available Extensions". If not, manually  |



|                           |  |
|---------------------------|--|
|                           | enter the remote extensions under "Special Extensions" field.  |
| <b>Special Extensions</b> | Manually enter the remote extensions in the peer/register trunk to be monitored in the event list.<br>Valid format: 5000,5001,9000 |

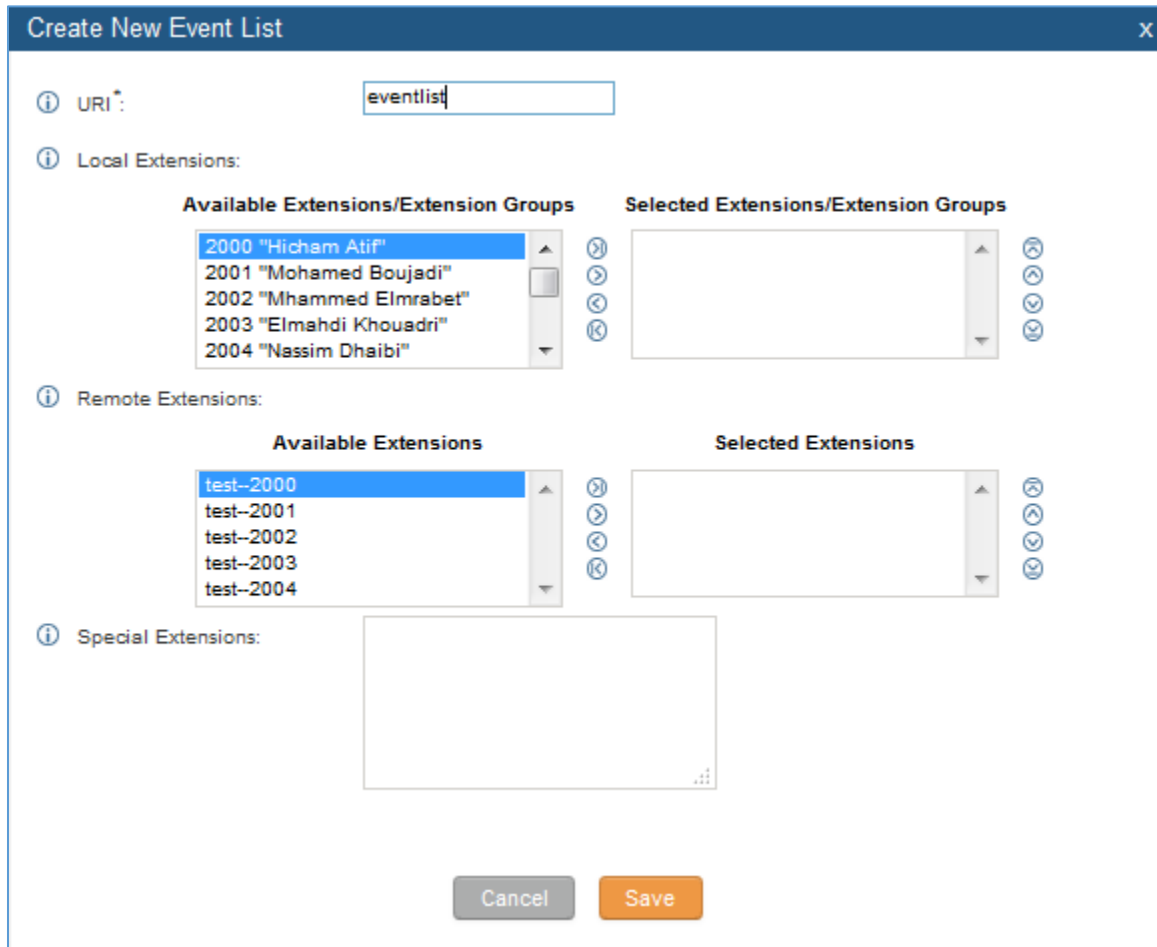


Figure 163: Create New Event List

Remote extension monitoring works on the UCM6200 via event list BLF, among Peer SIP trunks or Register SIP trunks (register to each other). Therefore, please properly configure SIP trunks on the UCM6200 first before using remote BLF feature. Please note the SIP end points need support event list BLF in order to monitor remote extensions.

When an event list is created on the UCM6200 and remote extensions are added to the list, the UCM6200 will send out SIP SUBSCRIBE to the remote UCM6200 to obtain the remote extension status. When the SIP end points registers and subscribes to the local UCM6200 event list, it can obtain the remote extension status from this event list. Once successfully configured, the event list page will show the status of total extension and subscribers for each event list. Users can also select the event URI to check the monitored extension's status and the subscribers' details.



**Note:**

- To configure LDAP sync, please go to UCM6200 web GUI->**PBX->Basic/Call Routes->VoIP Trunk**. You will see "Sync LDAP Enable" option. Once enabled, please configure password information for the remote peer UCM6200 to connect to the local UCM6200. Additional information such as port number, LDAP outbound rule, LDAP Dialed Prefix will also be required. Both the local UCM6200 and remote UCM6200 need enable LDAP sync option with the same password for successful connection and synchronization.
  - Currently LDAP sync feature only works between two UCM6200s.
  - (Theoretically) Remote BLF monitoring will work when the remote PBX being monitored is non-UCM6200 PBX. However, it might not work the other way around depending on whether the non-UCM6200 PBX supports event list BLF or remote monitoring feature.
- 



## DIAL BY NAME

Dial by Name is a feature on the PBX that allows caller to search a person by first or last name via his/her phone's keypad. The administrator can define the Dial by Name directory including the desired extensions in the directory and the searching type by "first name" or "last name". After dialing in, the PBX IVR/Auto Attendant will guide the caller to spell the digits to find the person in the Dial by Name directory. This feature allows customers/clients to use the guided automatic system to get in touch with the enterprise employees without having to know the extension number, which brings convenience and improves business image for the enterprise.

### Dial by Name Configuration

The administrators can create the dial by name group under web GUI->**PBX->Call Features->Dial By Name**.


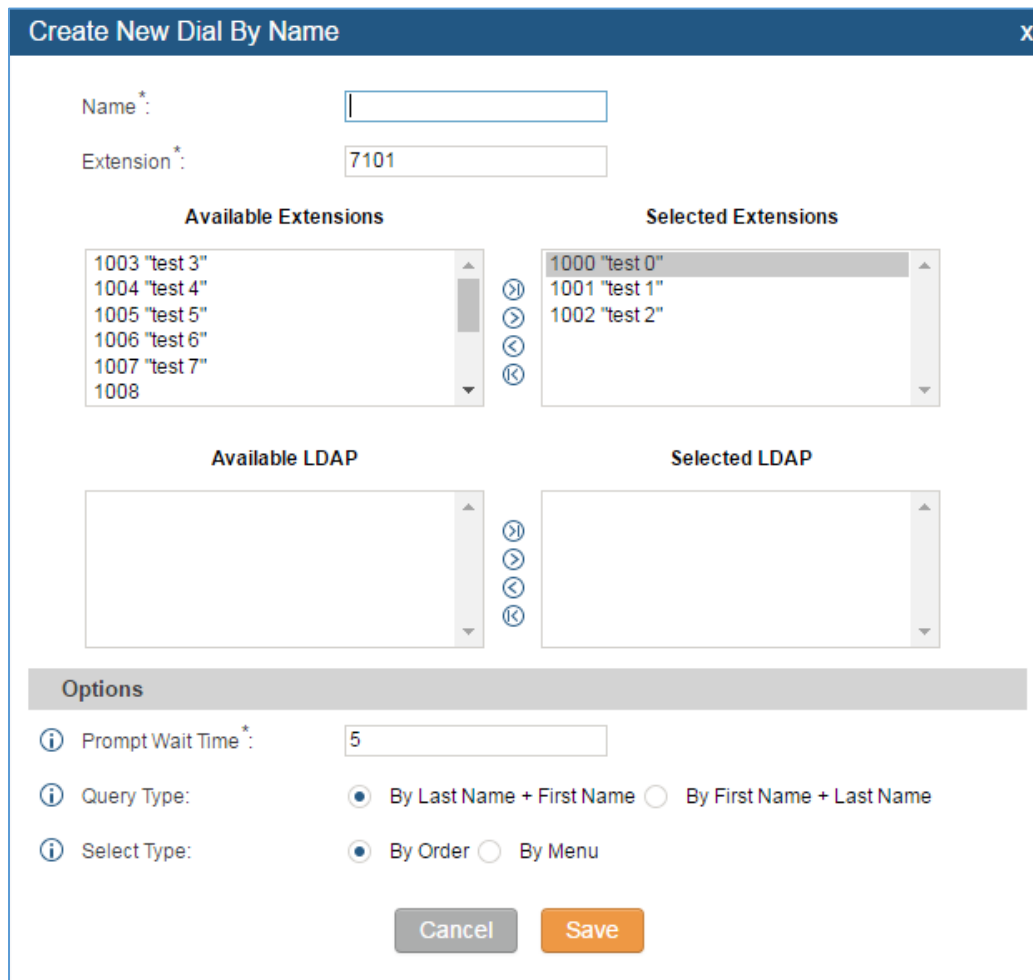


Figure 164: Create Dial By Name Group



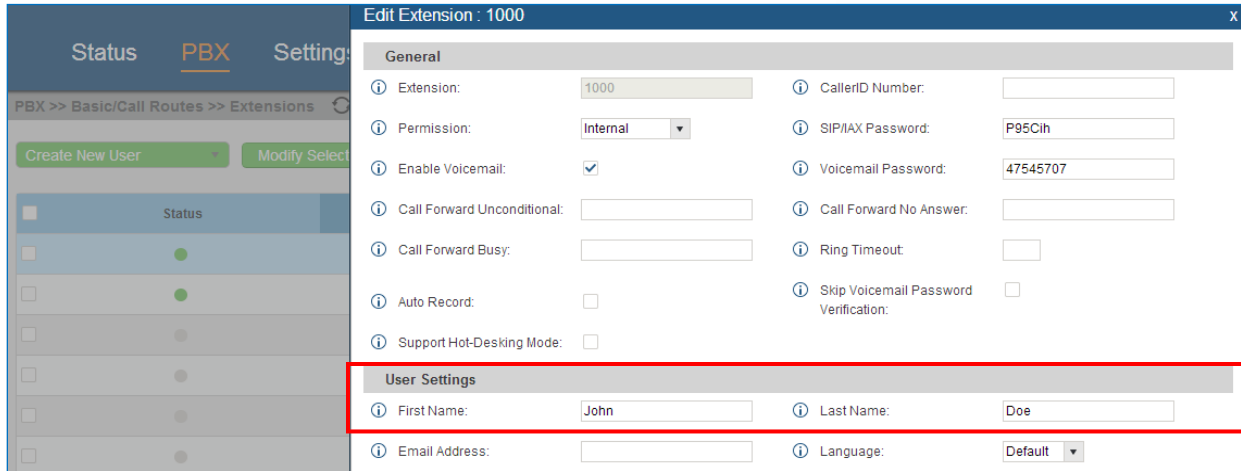

**Figure 165: Configure Extension First Name and Last Name**

### 1. Name

Enter a Name to identify the Dial by Name group.

### 2. Extension

Configure the direct dial extension for the Dial By Name group.

### 3. Available Extensions/Selected Extensions

Select available extensions from the left side to the right side as the directory for the Dial By Name group. Only the selected extensions here can be reached by the Dial By Name IVR when dialing into this group. The extensions here must have a valid first name and last name configured under web GUI->**PBX->Basic/Call Routes->Extensions** in order to be searchable in Dial By Name directory through IVR. By specifying the extensions here, the administrators can make sure unscreened calls will not reach the company employee if he/she does not want to receive them directly.

### 4. Prompt Wait Time

Configure "Prompt Wait Time" for Dial By Name feature. During Dial By Name call, the caller will need to input the first letters of First/Last name before this wait time is reached. Otherwise, timeout will occur and the call might hang up. The timeout range is between 3 and 60 seconds.

### 5. Query Type

Specify the query type. This defines how the caller will need to enter to search the directory.

By First Name: enter the first 3 digits of the first name to search the directory.

By Last Name: enter the first 3 digits of the last name to search the directory.

By Full Name: enter the first 3 digits of the first name or last name to search the directory.



## 6. Select Type

Specify the select type on the searching result. The IVR will confirm the name/number for the party the caller would like to reach before dialing out.

**By Order:** After the caller enters the digits, the IVR will announce the first matching party's name and number. The caller can confirm and dial out if it's the destination party, or press \* to listen to the next matching result if it's not the desired party to call.

**By Menu:** After the caller enters the digits, the IVR will announce 8 matching results. The caller can press number 1 to 8 to select and call, or press 9 for results in next page.

The Dial by Name group can be used as the destination for inbound route and key pressing event for IVR. The group name defined here will show up in the destination list when configuring IVR and inbound route. If Dial by Name is set as a key pressing event for IVR, user could use "\*" to exit from Dial by Name, then re-enter IVR and start a new event. The following example shows how to use this option.

Create New IVR

|                                       |   |
|---------------------------------------|---|
| <b>Name:</b>                          | <input type="text" value="IVR1"/>             |
| <b>Extension:</b>                     | <input type="text" value="7000"/>             |
| <b>Dial Other Extensions:</b>         | <input type="checkbox"/>                      |
| <b>Dial Trunk:</b>                    | <input type="checkbox"/>                      |
| <b>Permission:</b>                    | <span>Internal</span> ▼                       |
| <b>Welcome Prompt:</b>                | <span>welcome</span> ▼ <a href="#">Prompt</a> |
| <b>Digit Timeout:</b>                 | <input type="text" value="3"/>                |
| <b>Response Timeout:</b>              | <input type="text" value="10"/>               |
| <b>Response Timeout Prompt:</b>       | <span>ivr-create-timeout</span> ▼             |
| <b>Invalid Prompt:</b>                | <span>invalid</span> ▼                        |
| <b>Response Timeout Repeat Loops:</b> | <span>3</span> ▼                              |
| <b>Invalid Repeat Loops:</b>          | <span>3</span> ▼                              |
| <b>Language:</b>                      | <span>Default</span> ▼                        |

Key Pressing Events

|                 |                                 |                              |
|-----------------|---------------------------------|------------------------------|
| <b>Press 0:</b> | <span>Dial By Name</span> ▼     | <span>DialByNameGP1</span> ▼ |
| <b>Press 1:</b> | <span>Extension</span> ▼        | <span>1000</span> ▼          |
| <b>Press 2:</b> | <span>Conference Rooms</span> ▼ | <span>6300</span> ▼          |

**Figure 166: Dial By Name Group In IVR Key Pressing Events**





**Edit Inbound Rule** X

① DID Pattern:  /

① Privilege Level:

① Default Destination:

① Prepend Trunk Name:

① Alert-Info:

**Time Condition**

① Time Condition:

Figure 167: Dial By Name Group In Inbound Rule



## WAKEUP SERVICE

The WakeUp service can be used to schedule a reminder or wake up calls to any valid destination. This service is available on the UCM6200 as a separated module.

There are three ways to set up Wakeup Service:

- Using admin login
- Using user portal
- Using feature code

### WakeUp Service using admin login

- Login to the UCM as admin.
- WakeUp service can be found under “PBX -> Call Features -> Wakeup Service”, click on

**Create New Wakeup Service**

to create a new wakeup service. The following window will popup.

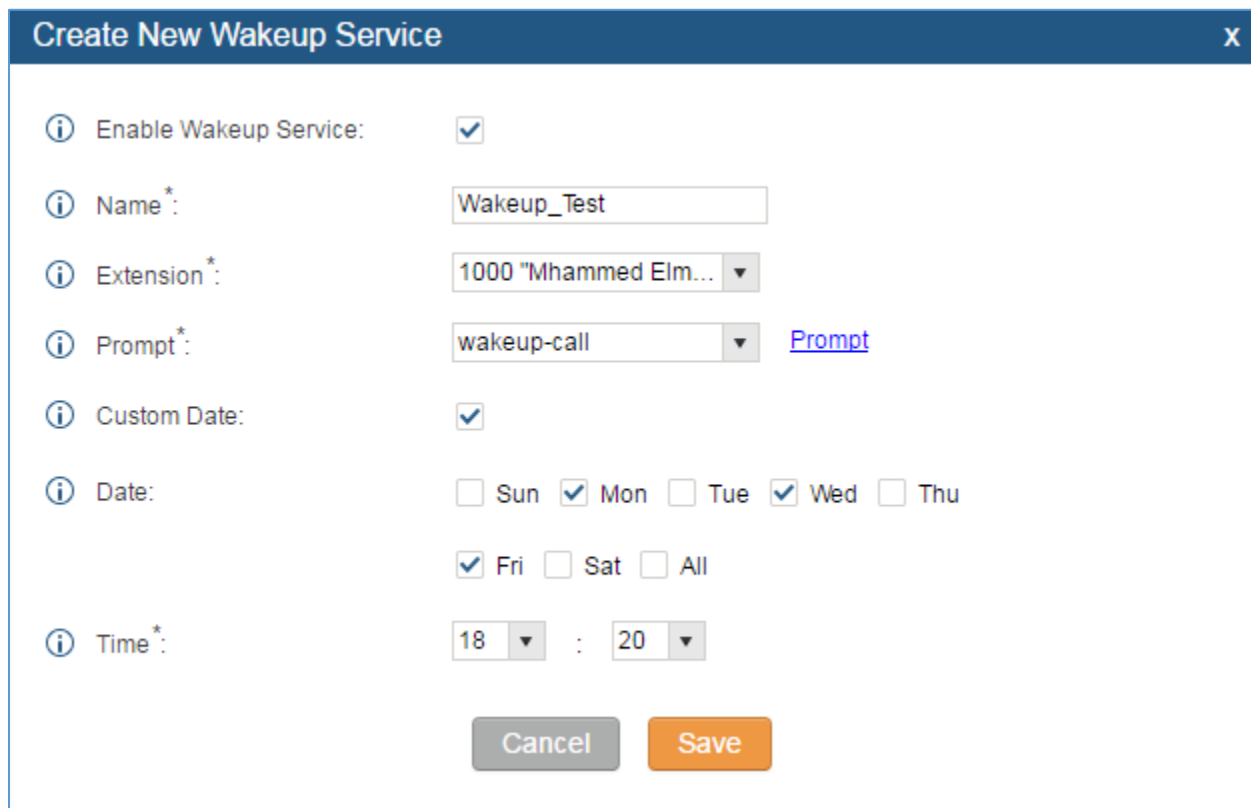


Figure 168: Create New Wakeup Service

- Click **Save** and **Apply Changes** to apply the changes.




Table 80: Wakeup Service

|                              |  |
|------------------------------|--|
| <b>Enable Wakeup Service</b> | Enable Wakeup service.                       |
| <b>Name</b>                  | Enter a name to identify the wakeup service. |




|                    |   |
|--------------------|---|
| <b>Extension</b>   | Select the extension to call.   |
| <b>Prompt</b>      | Select the prompt to play for that extension.   |
| <b>Custom Date</b> | If disabled, users can select a specific date and time.<br>If enabled users can select multiple days of the week to perform the wakeup. |
| <b>Date</b>        | Select the date or dates when to performs the wakeup call.  |
| <b>Time</b>        | Select the time when to play the wakeup call.   |

### WakeUp service from User portal

- Login to the user portal on the UCM6200.
- WakeUp service can be found under “Value-added Features -> Wakeup Service”, click on  to create a new wakeup service.
- Configures the Name, Prompt, Date and Time for the user to make the wakeup to.
- Click  and  to apply the changes.

### WakeUp service using feature code

- Login to the UCM as admin.
- Enable “Wakeup Service” from the WebGUI under “PBX -> Internal Options -> Feature Codes”.

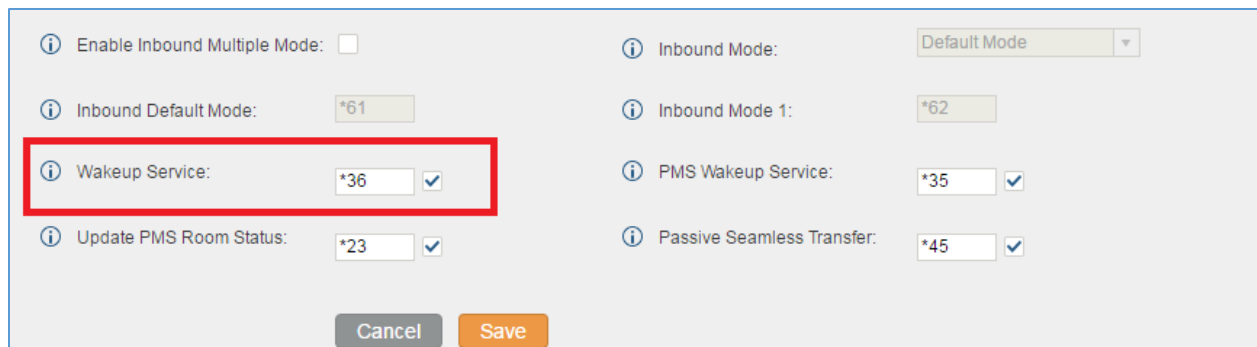

- Click  and  to apply the changes.

Dial “\*36” which is the feature code by default to access to the UCM wakeup service in order to add, update, activate or deactivate UCM wakeup service.



## ACTIVE CALLS AND MONITOR

The active calls on the UCM6200 are displayed in web UI->**Status->Active Calls** page. Users can monitor the status, hang up the call as well as barge in the active calls in real time manner.

### Active Calls Status

To view the status of active calls, navigate to web GUI->**Status->Active Calls**. The following figure shows extension 1000 is calling 1001. 1001 is ringing.

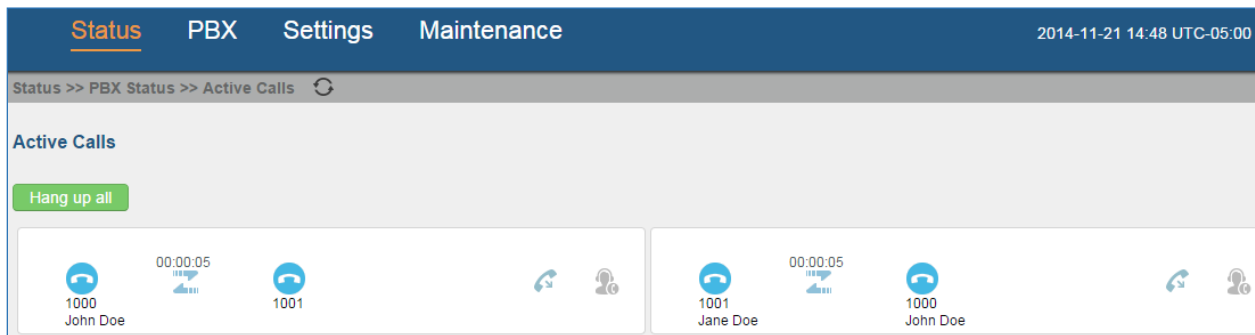


Figure 169: Status->PBX Status->Active Calls - Ringing

The following figure shows the call between 1000 and 1001 is established.

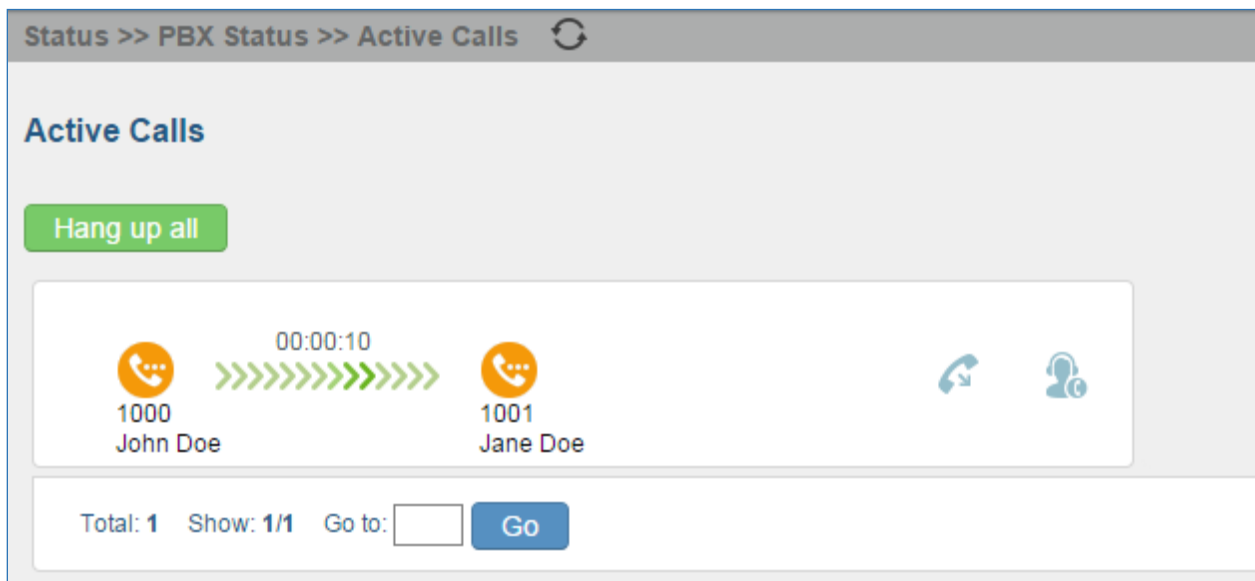



Figure 170: Status->PBX Status->Active Calls – Call Established

In active call web page, click on  to refresh the active call status.




## Hang Up Active Calls

To hang up an active call, click on  icon in the active call dialog. Users can also click on **Hang up all** to hang up all active calls.

## Call Monitor

During an active call, click on icon  and the monitor dialog will pop up.

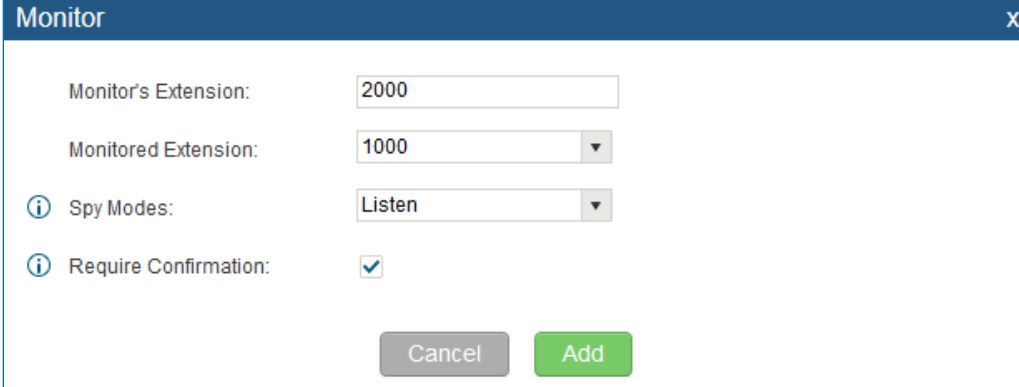

**Figure 171: Configure to Monitor an Active Call**

In the “Monitor” dialog, configure the following to monitor an active call:

1. Enter an available extension for “Monitor’s Extension” which will be used to monitor the active call.
2. “Monitored Extension” must be one of the parties in the active call to be monitored.
3. Select spy mode. There are three options in “Spy Mode”.
  - Listen
 

In “Listen” mode, the extension monitoring the call can hear both parties in the active call but the audio of the user on this extension will not be heard by either party in the monitored active call.
  - Whisper
 

In “Whisper” mode, the extension monitoring the call can hear both parties in the active call. The user on this extension can only talk to the selected monitored extension and he/she will not be heard by the other party in the active call. This can be usually used to supervise calls.
  - Barge
 

In “Barge” mode, the extension monitoring the call can talk to both parties in the active call. The call will be established similar to three-way conference.
4. Enable or disable “Require Confirmation” option. If enabled, the confirmation of the invited monitor’s extension is required before the active call can be monitored. This option can be used to avoid adding participant who has auto-answer configured or call forwarded to voicemail.
5. Click on “Add”. An INVITE will be sent to the monitor’s extension. The monitor can answer the call and start monitoring. If “Require Confirmation” is enabled, the user will be asked to confirm to monitor the call.



Another way to monitor active calls is to dial the corresponding feature codes from an extension. Please refer to **[Table 81: UCM6200 Feature Codes]** and **[Enable Spy]** section for instructions.



## CALL FEATURES

The UCM6200 supports call recording, transfer, call forward, call park and other call features via feature code. This section lists all the feature codes in the UCM6200 and describes how to use the call features.

### Feature Codes

Table 81: UCM6200 Feature Codes

| Feature Maps             |   |
|--------------------------|---|
| <b>Blind Transfer</b>    | <ul style="list-style-type: none"> <li>• Default code: #1.</li> <li>• Enter the code during active call. After hearing "Transfer", you will hear dial tone. Enter the number to transfer to. Then the user will be disconnected and transfer is completed.</li> <li>• Options               <ul style="list-style-type: none"> <li><b>Disable</b></li> <li><b>Allow Caller:</b> Enable the feature code on caller side only.</li> <li><b>Allow Callee:</b> Enable the feature code on callee side only.</li> <li><b>Allow Both:</b> Enable the feature code on both caller and callee.</li> </ul> </li> </ul>   |
| <b>Attended Transfer</b> | <ul style="list-style-type: none"> <li>• Default code: *2.</li> <li>• Enter the code during active call. After hearing "Transfer", you will hear the dial tone. Enter the number to transfer to and the user will be connected to this number. Hang up the call to complete the attended transfer.</li> <li>• Options               <ul style="list-style-type: none"> <li><b>Disable</b></li> <li><b>Allow Caller:</b> Enable the feature code on caller side only.</li> <li><b>Allow Callee:</b> Enable the feature code on callee side only.</li> <li><b>Allow Both:</b> Enable the feature code on both caller and callee.</li> </ul> </li> </ul> |
| <b>Seamless Transfer</b> | <p>Seamless Transfer allows user to perform blind transfer using UCM feature code without having music on hold presented during the transfer process, it minimizes the interruption during transfer, making the process smooth and simple.</p> <p>During an active call use the feature code (*44 which is the default) followed by the number you want to transfer to in order to perform the active seamless transfer.</p>  |



|  |  |
|--|--|
| <b>Disconnect</b>                      | <ul style="list-style-type: none"> <li>• Default code: *0.</li> <li>• Enter the code during active call. It will disconnect the call.</li> <li>• Options</li> </ul> <p><b>Disable</b></p> <p><b>Allow Caller:</b> Enable the feature code on caller side only.</p> <p><b>Allow Callee:</b> Enable the feature code on callee side only.</p> <p><b>Allow Both:</b> Enable the feature code on both caller and callee.</p>   |
| <b>Call Park</b>                       | <ul style="list-style-type: none"> <li>• Default code: #72.</li> <li>• Enter the code during active call to park the call.</li> <li>• Options</li> </ul> <p><b>Disable</b></p> <p><b>Allow Caller:</b> Enable the feature code on caller side only.</p> <p><b>Allow Callee:</b> Enable the feature code on callee side only.</p> <p><b>Allow Both:</b> Enable the feature code on both caller and callee.</p>  |
| <b>Audio Mix Record</b>                | <ul style="list-style-type: none"> <li>• Default code: *3.</li> <li>• Enter the code followed by # or SEND to start recording the audio call and the UCM6200 will mix the streams natively on the fly as the call is in progress.</li> <li>• Options</li> </ul> <p><b>Disable</b></p> <p><b>Allow Caller:</b> Enable the feature code on caller side only.</p> <p><b>Allow Callee:</b> Enable the feature code on callee side only.</p> <p><b>Allow Both:</b> Enable the feature code on both caller and callee.</p> |
| <b>DND/Call Forward</b>                |  |
| <b>Do Not Disturb (DND) Activate</b>   | <ul style="list-style-type: none"> <li>• Default code: *77.</li> </ul>   |
| <b>Do Not Disturb (DND) Deactivate</b> | <ul style="list-style-type: none"> <li>• Default code: *78.</li> </ul>   |
| <b>Call Forward Busy Activate</b>      | <ul style="list-style-type: none"> <li>• Default Code: *90.</li> <li>• Enter the code and follow the voice prompt. Or enter the code followed by the extension to forward the call.</li> </ul>   |
| <b>Call Forward Busy Deactivate</b>    | <ul style="list-style-type: none"> <li>• Default Code: *91.</li> </ul>   |
| <b>Call Forward No Answer Activate</b> | <ul style="list-style-type: none"> <li>• Default Code: *92.</li> <li>• Enter the code and follow the voice prompt. Or enter the code followed by the extension to forward the call.</li> </ul>   |





|  |  |
|--|--|
| <b>Call Forward No Answer Deactivate</b>     | <ul style="list-style-type: none"> <li>• Default Code: *93.</li> </ul>   |
| <b>Call Forward Unconditional Activate</b>   | <ul style="list-style-type: none"> <li>• Default Code: *72.</li> <li>• Enter the code and follow the voice prompt. Or enter the code followed by the extension to forward the call.</li> </ul>   |
| <b>Call Forward Unconditional Deactivate</b> | <ul style="list-style-type: none"> <li>• Default Code: *73.</li> </ul>   |
| <b>Feature Misc</b>                          |  |
| <b>Feature Code Digits Timeout</b>           | <ul style="list-style-type: none"> <li>• Default Setting: 1000.</li> <li>• Configure the maximum interval (in milliseconds) between the digits input to activate the feature code.</li> </ul>  |
| <b>Call Park</b>                             | <ul style="list-style-type: none"> <li>• Default Extension: 700.</li> <li>• During an active call, initiate blind transfer and then enter this code to park the call.</li> </ul>   |
| <b>Parked Lots</b>                           | <ul style="list-style-type: none"> <li>• Default Extension: 701-720.</li> <li>• These are the extensions where the calls will be parked, i.e., parking lots that the parked calls can be retrieved.</li> </ul>   |
| <b>Use Parklot as Extension</b>              | <ul style="list-style-type: none"> <li>• If checked, the parking lot number can be used as extension. The user can transfer the call to the parking lot number to park the call. Please note this parking lot number range might conflict with extension range.</li> </ul> |
| <b>Parking Timeout (s)</b>                   | <ul style="list-style-type: none"> <li>• Default setting: 300.</li> <li>• This is the timeout allowed for a call to be parked. After the timeout, if the call is not picked up, the extension who parks the call will be called back.</li> </ul>                           |
| <b>Feature Codes</b>                         |  |
| <b>Voicemail Access Code</b>                 | <ul style="list-style-type: none"> <li>• Default Code: *98.</li> <li>• Enter *98 and follow the voice prompt. Or dial *98 followed by the extension and # to access the entered extension's voicemail box.</li> </ul>  |
| <b>My Voicemail</b>                          | <ul style="list-style-type: none"> <li>• Default Code: *97.</li> <li>• Press *97 to access the voicemail box.</li> </ul>   |
| <b>Agent Pause</b>                           | <ul style="list-style-type: none"> <li>• Default Code: *83.</li> <li>• Pause the agent in all call queues.</li> </ul>  |




|                                     |  |
|-------------------------------------|--|
| <b>Agent Unpause</b>                | <ul style="list-style-type: none"> <li>• Default Code: *84.</li> <li>• Unpause the agent in all call queues.</li> </ul>  |
| <b>Paging Prefix</b>                | <ul style="list-style-type: none"> <li>• Default Code: *81.</li> <li>• To page an extension, enter the code followed by the extension number.</li> </ul>   |
| <b>Intercom Prefix</b>              | <ul style="list-style-type: none"> <li>• Default Code: *80.</li> <li>• To intercom an extension, enter the code followed by the extension number.</li> </ul>   |
| <b>Blacklist Add</b>                | <ul style="list-style-type: none"> <li>• Default Code: *40.</li> <li>• To add a number to blacklist for inbound route, dial *40 and follow the voice prompt to enter the number.</li> </ul>  |
| <b>Blacklist Remove</b>             | <ul style="list-style-type: none"> <li>• Default Code: *41.</li> <li>• To remove a number from current blacklist for inbound route, dial *41 and follow the voice prompt to remove the number.</li> </ul>  |
| <b>Call Pickup on Ringing</b>       | <ul style="list-style-type: none"> <li>• Default Code: **.</li> <li>• To pick up a call for any extension xxxx, enter the code followed by the extension number xxxx.</li> </ul>   |
| <b>Pickup Incall</b>                | <p>To perform pickup incall, enter pickup incall code, and then enter pickup number. If the extension dialed from is present in the seamless transfer privilege control list, you can pickup incall successfully</p>   |
| <b>Pickup Extension</b>             | <ul style="list-style-type: none"> <li>• Default Code: *8.</li> <li>• This code is for the pickup group which can be assigned for each extension on the extension configuration page.</li> <li>• If there is an incoming call to an extension, the other extensions within the same pickup group can dial *8 directly to pick up the call.</li> </ul>  |
| <b>Direct Dial Voicemail Prefix</b> | <ul style="list-style-type: none"> <li>• Default Code: *</li> <li>• This code is for the user to directly dial or transfer to an extension's voicemail.</li> <li>• For example, directly dial *5000 will have to call go into the extension 5000's voicemail. If the user would like to transfer the call to the extension 5000's voicemail, enter *5000 as the transfer target number.</li> </ul> |



|  |  |
|--|--|
| <b>Direct Dial Mobile Phone Prefix</b> | If you have the permission to call mobile phone number, use this prefix plus the extension number can dial the mobile phone number of this extension directly.   |
| <b>Call Completion Request</b>         | <ul style="list-style-type: none"> <li>• Default Code: *11</li> <li>• This code is for the user who wants to use Call Completion to complete a call.</li> </ul>  |
| <b>Call Completion Cancel</b>          | <ul style="list-style-type: none"> <li>• Default Code: *12</li> <li>• This code is for the user who wants to cancel Call Completion request.</li> </ul>  |
| <b>Enable Spy</b>                      | Check this box to enable spy feature codes.  |
| <b>Listen Spy</b>                      | This is the feature code to listen in on a call to monitor performance. Monitor's line will be muted, and neither party will hear from the monitor's extension. The default setting is *54.                            |
| <b>Whisper Spy</b>                     | This is the feature code to speak to one side of the call (for example, whisper to employees to help them handle a call). Only one side will be able to hear from the monitor's extension. The default setting is *55. |
| <b>Barge Spy</b>                       | This is the feature code to join in on the call to assist both parties. The default setting is *56.  |
| <b>Enable Inbound Multiple Mode</b>    | If enabled, user can switch between different inbound route modes with feature code. By default, this option is disabled.  |
| <b>Inbound Default Mode</b>            | This feature code is used to switch inbound route mode to default mode. The default setting is *61.  |
| <b>Inbound Mode 1</b>                  | This feature code is used to switch inbound route mode to mode 1. The default setting is *62.  |

The UCM6200 also allows user to one click enable / disable specific feature code. As shown below:

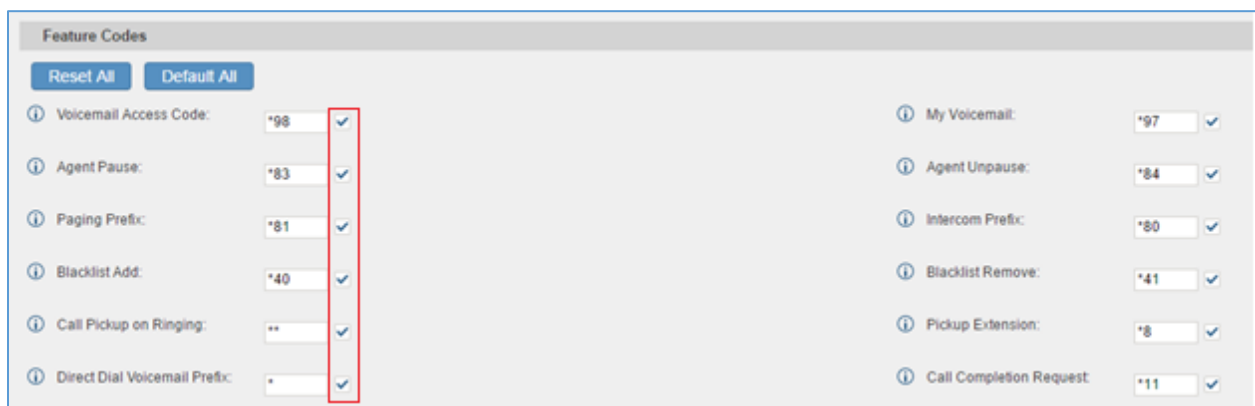



**Figure 172: Enable/Disable Feature codes**



## Call Recording

The UCM6200 allows users to record audio during the call. If "Auto Record" is turned on for an extension, ring group, call queue or trunk, the call will be automatically recorded when there is established call with it. Otherwise, please follow the instructions below to manually record the call.

1. Make sure the feature code for "Audio Mix Record" is configured and enabled.
2. After establishing the call, enter the "Audio Mix Record" feature code (by default it's \*3) followed by # or SEND to start recording.
3. To stop the recording, enter the "Audio Mix Record" feature code (by default it's \*3) followed by # or SEND again. Or the recording will be stopped once the call hangs up.
4. The recording file can be retrieved under Web GUI->**Status**->**CDR**. Click on  to play the recording or click on  to download the recording file.



View Report

Click on the title of the column to sort by column. Click on the row to display full record. View: 10


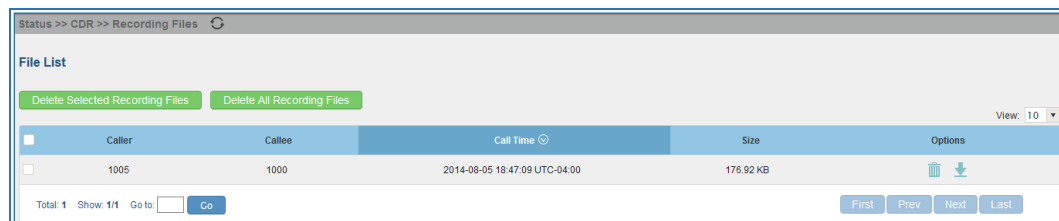
| No. | Start Time          | Call From | Call To | Call Time | Talk Time | Status  | Options   |
|-----|---------------------|-----------|---------|-----------|-----------|---|---|
| 1   | 2013-07-03 17:55:04 | 6000      | 5001    | 0:00:18   | 0:00:16   |    |          |
| 2   | 2013-07-03 17:54:32 | 6000      | 5001    | 0:00:19   | 0:00:18   |   |       |
| 3   | 2013-07-03 17:53:11 | 6000      | 6300    | 0:00:11   | 0:00:11   |  |    |

Figure 173: Download Recording File from CDR Page



The above recorded call's recording files are also listed under the UCM6200 web GUI->**CDR**->**Recording Files**.



Status >> CDR >> Recording Files

File List

Delete Selected Recording Files Delete All Recording Files View: 10

|                          | Caller | Callee | Call Time                     | Size      | Options   |
|--------------------------|--------|--------|-------------------------------|-----------|---|
| <input type="checkbox"/> | 1005   | 1000   | 2014-08-05 18:47:09 UTC-04:00 | 176.92 KB |   |

Total: 1 Show: 1/1 Go to:  Go First Prev Next Last

Figure 174: Download Recording File from Recording Files Page

## Call Park

The UCM6200 provides call park and call pickup features via feature code.

### Park A Call

There are two feature codes that can be used to park the call.

- Feature Maps->Call Park (Default code #72)



During an active call, press #72 and the call will be parked. Parking lot number (default range 701 to 720) will be announced after parking the call.

- Feature Misc->Call Park (Default code 700)

During an active call, initiate blind transfer (default code #1) and then dial 700 to park the call. Parking lot number (default range 701 to 720) will be announced after parking the call.

### Retrieve The Parked Call

To retrieve the parked call, simply dial the parking lot number and the call will be established. If a parked call is not retrieved after the timeout, the original extension who parks the call will be called back.

### Enable Spy

If “Enable Spy” option is enabled, feature codes for Listen Spy, Whisper Spy and Barge Spy are available for users to dial from any extension to perform the corresponding actions.

Assume a call is on-going between extension A and extension B, user could dial the feature code from extension C to listen on their call (\*54 by default), whisper to one side (\*55 by default), or barge into the call (\*56 by default). Then the user will be asked to enter the number to call, which should be either side of the active call, extension A or B in this example.



#### **Caution:**

“Enable Spy” allows any user to listen to any call by feature codes. This may result in the leakage of user privacy.

---

## INTERNAL OPTIONS

This section describes internal options that haven't been mentioned in previous sections yet. The settings in this section can be applied globally to the UCM6200, including general configurations, jitter buffer, RTP settings, ports config and STUN monitor. The options can be accessed via Web GUI->**PBX->Internal Options->General**.

### Internal Options/General

Table 82: Internal Options/General

| General Preferences             |   |
|---------------------------------|---|
| <b>Global OutBound CID</b>      | Configure the global CallerID used for all outbound calls when no other CallerID is defined with higher priority. If no CallerID is defined for extension or trunk, the global outbound CID will be used as CallerID.   |
| <b>Global OutBound CID Name</b> | Configure the global CallerID Name used for all outbound calls. If configured, all outbound calls will have the CallerID Name set to this name. If not, the extension's CallerID Name will be used.   |
| <b>Operator Extension</b>       | Specify the operator extension, which will be dialed when users press 0 to exit voicemail application. The operator extension can also be used in IVR option.   |
| <b>Ring Timeout</b>             | Configure the number of seconds to ring an extension before the call goes to the user's voicemail box. The default setting is 60.<br><br><b>Note:</b><br>This is the global value used for each extension if "Ring Timeout" field is left empty on the extension configuration page.  |
| <b>Call Duration Limit</b>      | Configure the maximum duration of call-blocking.  |
| <b>Record Prompt</b>            | If enabled, users will hear voice prompt before recording is started or stopped. For example, before recording, the UCM6200 will play voice prompt "The call will be recorded". The default setting is "No".  |
| Extension Preferences           |   |
| <b>Enforce Strong Passwords</b> | If enabled, strong password will be enforced for the password created on the UCM6200. The default setting is enabled.<br><br>Strong Password Rules:<br>1. Password for voicemail, voicemail group, outbound route, DISA, call queue and conference requires non-repetitive and non-sequential digits, with a minimum length of 4 digits. Repetitive digits pattern (such as 0000, 1111, |



|                                  |   |
|----------------------------------|---|
|                                  | <p>1234, 2345, and etc), or common digits pattern (such as 111222, 321321 and etc) are not allowed to be configured as password.</p> <p>2. Password for extension registration, web GUI admin login, LDAP and LDAP sync requires alphanumeric characters containing at least two categories of the following, with a minimum length of 4 characters.</p> <ul style="list-style-type: none"> <li>• Numeric digits</li> <li>• Lowercase alphabet characters</li> <li>• Uppercase alphabet characters</li> <li>• Special characters</li> </ul>   |
| <b>Enable Random Password</b>    | <p>If enabled, random password will be generated when the extension is created. The default setting is "Yes". It is recommended to enable it for security purpose.</p>  |
| <b>Enable Auto Email To User</b> | <p>If enabled, UCM6200 will send Email notification to user automatically after editing extension settings or adding a new extension.</p>   |
| <b>Disable Extension Range</b>   | <p>If set to "Yes", users could disable the extension range pre-configured/configured on the UCM6200. The default setting is "No".</p> <p><b>Note:</b><br/>It is recommended to keep the system assignment to avoid inappropriate usage and unnecessary issues.</p>   |
| <b>Extension Ranges</b>          | <p>The default extension range assignment is:</p> <ul style="list-style-type: none"> <li>• User Extensions: 1000-6299<br/>User Extensions is referring to the extensions created under web UI-&gt;<b>PBX-&gt;Basic/Call Routes-&gt;Extensions</b> page.</li> <li>• Pick Extensions: 4000-4999<br/>This refers to the extensions that can be manually picked from end device when being provisioned by the UCM6200. There are two related options in zero config page-&gt;Auto Provision Settings, "Pick Extension Segment" and "Enable Pick Extension". If "Enable Pick Extension" under zero config settings is selected, the extension list defined in "Pick Extension Segment" will be sent out to the device after receiving the device's request. This "Pick Extension Segment" should be a subset of the "Pick Extensions" range here. This feature is for the GXP series phones that support selecting extension to be provisioned via phone's LCD.</li> <li>• Auto Provision Extensions: 5000-6299<br/>This sets the range for "Zero Config Extension Segment" which is the extensions can be assigned on the UCM6200 to provision the end device.</li> </ul> |



- Conference Extensions: 6300-6399
- Ring Group Extensions: 6400-6499
- Queue Extensions: 6500-6599
- Voicemail Group Extensions: 6600-6699
- IVR Extensions: 7000-7100
- Dial By Name Extensions: 7101-7199
- Fax Extensions: 7200-8200

## Internal Options/Custom Prompt

### Record New Custom Prompt

In the UCM6200 web UI->**PBX**->**Internal Options**->**Custom Prompt** page, click on “Record New Custom Prompt” and follow the steps below to record new IVR prompt.

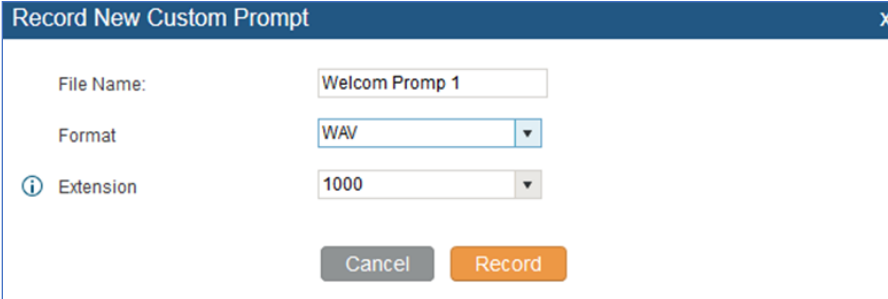


Figure 175: Record New Custom Prompt

- Specify the IVR file name.
- Select the format (GSM or WAV) for the IVR prompt file to be recorded.
- Select the extension to receive the call from the UCM6200 to record the IVR prompt.
- Click the “Record” button. A request will be sent to the UCM6200. The UCM6200 will then call the extension for recording the IVR prompt from the phone.
- Pick up the call from the extension and start the recording following the voice prompt.
- The recorded file will be listed in the IVR Prompt web page. Users could select to re-record, play or delete the recording.





## Upload Custom Prompt

If the user has a pre-recorded IVR prompt file, click on “Upload Custom Prompt” in Web GUI->**PBX->Internal Options->Custom Prompt** page to upload the file to the UCM6200. The following are required for the IVR prompt file to be successfully uploaded and used by the UCM6200:

- PCM encoded.
- 16 bits.
- 8000Hz mono.
- In .mp3 or .wav format; or raw/ulaw/alaw/gsm file with .ulaw or .alaw suffix.
- File size under 5M.

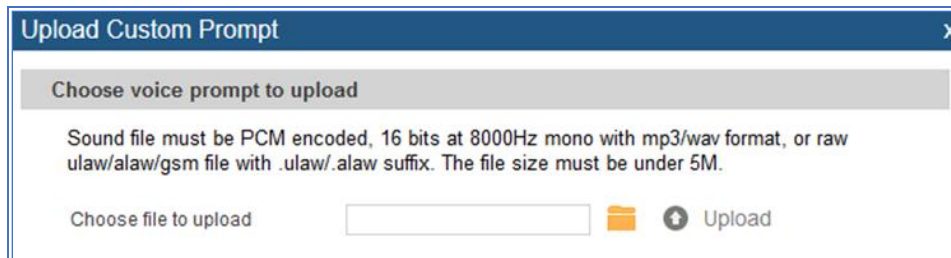




Figure 176: Upload Custom Prompt

Click on  to select audio file from local PC and click on  to start uploading. Once uploaded, the file will appear in the Custom Prompt web page.

## Download All Custom Prompt

On the UCM62XX, the users can download all custom prompts from UCM web UI to local PC. To download all custom prompt, log in UCM web UI and navigate to **PBX->Internal Options->Custom Prompt** and click on

. The following window will pop up in order to set a name for the downloaded file.

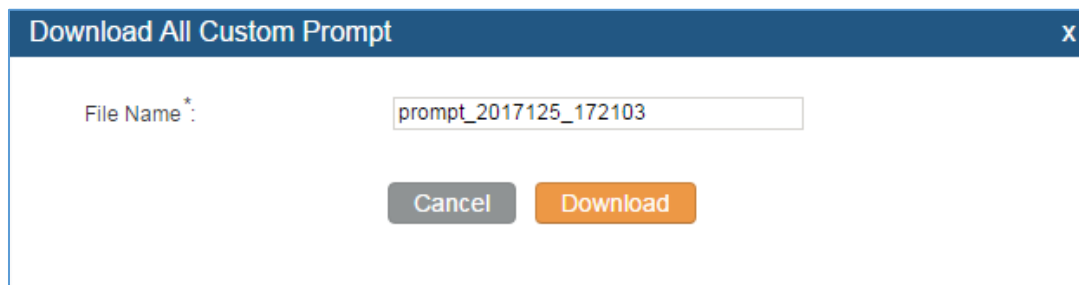


Figure 177: Download All Custom Prompt

**Note:** The downloaded file will have a .tar extension.



## Internal Options/Jitter Buffer

Table 83: Internal Options/Jitter Buffer

| SIP Jitter Buffer           |  |
|-----------------------------|--|
| <b>Enable Jitter Buffer</b> | Select to enable jitter buffer on the sending side of the SIP channel. The default setting is "No".  |
| <b>Jitter Buffer Size</b>   | Configure the time (in ms) to buffer. This is the jitter buffer size used in "Fixed" jitter buffer, or used as the initial time for "adaptive" jitter buffer. The default setting is 100.  |
| <b>Max Jitter Buffer</b>    | Configure the maximum time (in ms) to buffer for "Adaptive" jitter buffer implementation, or used as the jitter buffer size for "Fixed" jitter buffer implementation. The default setting is 200.  |
| <b>Implementation</b>       | <p>Configure the jitter buffer implementation on the sending side of a SIP channel. The default setting is "Fixed".</p> <ul style="list-style-type: none"> <li>• <b>Fixed</b><br/>The size is always equal to the value of "Max Jitter Buffer".</li> <li>• <b>Adaptive</b><br/>The size is adjusted automatically and the maximum value equals to the value of "Max Jitter Buffer".</li> </ul> |

## Internal Options/RTP Settings

Table 84: Internal Options/RTP Settings

|                      |   |
|----------------------|---|
| <b>RTP Start</b>     | Configure the RTP port starting number. The default setting is 10000.   |
| <b>RTP End</b>       | Configure the RTP port ending address. The default setting is 20000.  |
| <b>Strict RTP</b>    | Configure to enable or disable strict RTP protection. If enabled, RTP packets that do not come from the source of the RTP stream will be dropped. The default setting is "Disable". |
| <b>RTP Checksums</b> | Configure to enable or disable RTP Checksums on RTP traffic. The default setting is "Disable".  |



|                    |  |
|--------------------|--|
| <b>ICE Support</b> | <p>Configure whether to support ICE. The default setting is enabled.</p> <p>ICE is the integrated use of STUN and TURN structure to provide reliable VoIP or video calls and media transmission, via a SIP request/ response model or multiple candidate endpoints exchanging IP addresses and ports, such as private addresses and TURN server address.</p>   |
| <b>STUN Server</b> | <p>Configure STUN server address. STUN protocol is a Client/Server and also a Request/Response protocol. It's used to check the connectivity between the two terminals, such as maintaining a NAT binding entries keep-alive agreement. The default STUN Server is stun.ipvideotalk.com.</p> <p>Valid format:<br/>       [(hostname   IP-address) [:' port]</p> <p>The default port number is 3478 if not specified.</p> |

## Internal Options/Payload

The UCM6200 payload type for audio codecs and video codes can be configured here.

**Table 85: Internal Options/Payload**

|                         |  |
|-------------------------|--|
| <b>AAL2-G.726</b>       | Configure payload type for ADPCM (G.726, 32kbps, AAL2 codeword packing). The default setting is 112. |
| <b>DTMF</b>             | Configured payload type for DTMF. The default setting is 101.  |
| <b>G.721 Compatible</b> | Configure to enable/disable G.721 compatible. The default setting is Yes.                            |
| <b>G.726</b>            | Configure the payload type for G.726 if "G.721 Compatible" is disabled. The default setting is 111.  |
| <b>iLBC</b>             | Configure the payload type for iLBC. The default setting is 97.                                      |
| <b>H.264</b>            | Configure the payload type for H.264. The default setting is 99.                                     |
| <b>H.263P</b>           | Configure the payload type for H.263+. The default setting is 100 103.                               |
| <b>VP8</b>              | Configure the payload type for VP8. The default settings is 108.                                     |

## Internal Options/PIN Groups


The UCM6200 supports pin group. Once this feature is configured, users can apply pin group to specific outbound routes. When placing a call on pin protected outbound routes, caller will be asked to input the group pin number, this feature can be found on the webGUI under “ PBX->Internal Options->PIN Groups ”.



**Table 86: Internal Options/PIN Group**



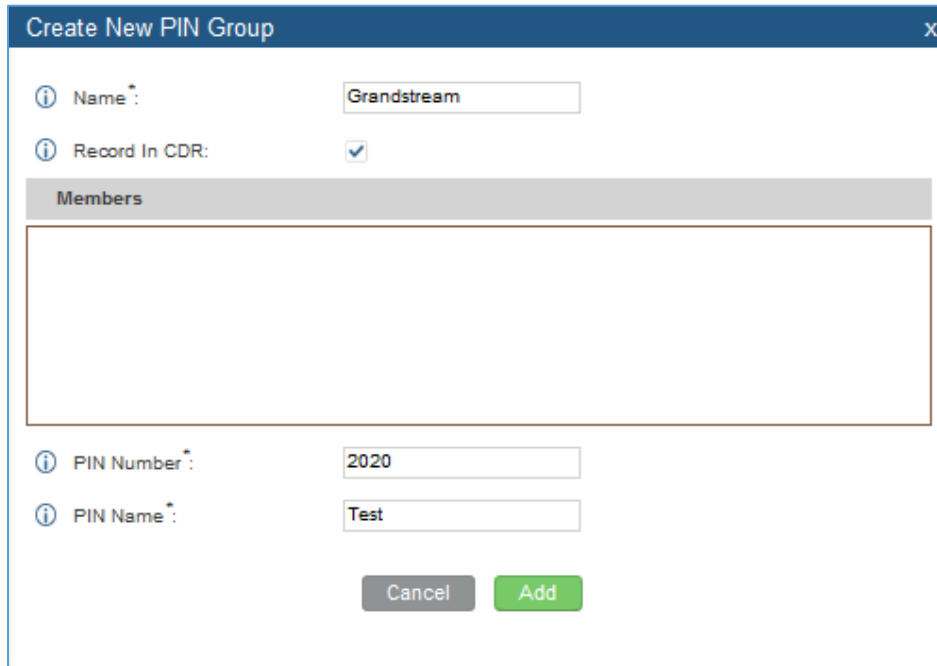

|                      |   |
|----------------------|---|
| <b>Name</b>          | Specify the name of the group                             |
| <b>Record In CDR</b> | Specify whether to enable/disable record in CDR           |
| <b>PIN Number</b>    | Specify the code that will asked once dialing via a trunk |
| <b>PIN Name</b>      | Specify the name of the PIN                               |

Once user click on [Create New PIN Group](#) the following figure pop's up for configuring the new Pin.



**Figure 178: Create New PIN Group**

Once PIN Groups and members Created it should look like:


| Name           | Record In CDR | Options   |
|----------------|---------------|---|
| - Grandstream  | yes           |   |
| PIN Number     |               | PIN Name  |
| 2020           |               | Test  |
| 2021           |               | test2   |
| 2022           |               | test3   |
| - Grandstream1 | no            |   |
| PIN Number     |               | PIN Name  |
| 3031           |               | test6   |
| 3032           |               | test5   |
| 3034           |               | test4   |

Total: 2 Show: 1/1 Go to:

**Figure 179: PIN members**



Please note, if pin group is enabled on outbound route level, password, privilege level and enable filter on source caller ID will be disabled.

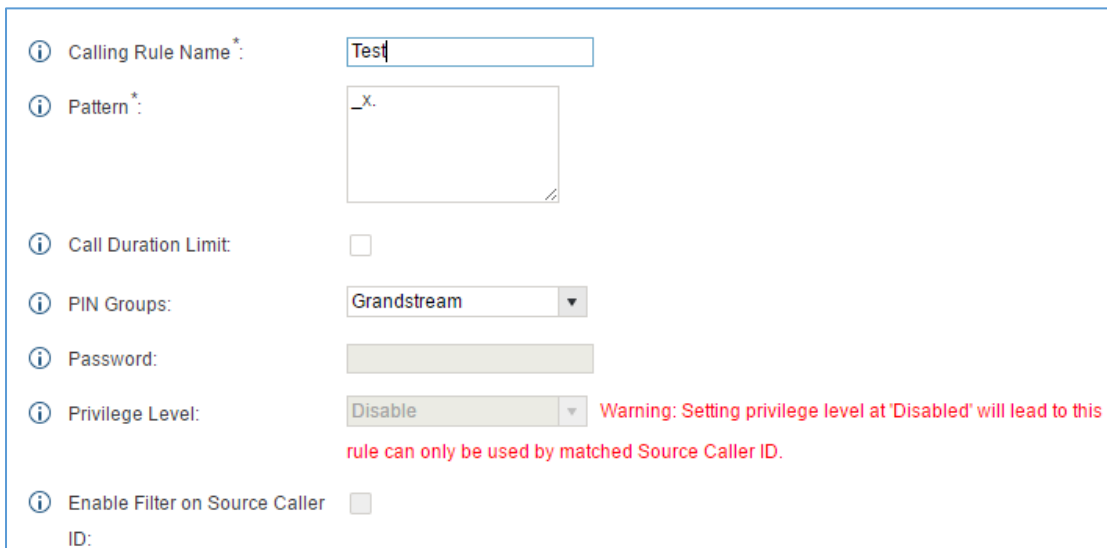

Calling Rule Name\*:

Pattern\*:

Call Duration Limit:

PIN Groups:

Password:

Privilege Level: 
Warning: Setting privilege level at 'Disabled' will lead to this rule can only be used by matched Source Caller ID.

Enable Filter on Source Caller ID:

**Figure 180: Outbound PIN**

If pin group CDR is enabled, the call with pin group information will be displayed as part of CDR under Account Code field.

| No. | Start Time          | Call Type | Call From      | Call To                | Call Time | Talk Time | Account Code      | Status | Recording | File Optio      | Options |  |
|-----|---------------------|-----------|----------------|------------------------|-----------|-----------|-------------------|--------|-----------|-----------------|---------|--|
| 1   | 2016-06-17 06:18:10 | DIAL      | "Hicham" 2000  | 22222 [Trunk: UCM6202] | 0:00:06   | 0:00:06   | Test/Grandstream  |        | No        | Recording Files |         |  |
| 2   | 2016-06-17 06:17:52 | DIAL      | "Mohamed" 2001 | 22222 [Trunk: UCM6202] | 0:00:05   | 0:00:05   | test2/Grandstream |        | No        | Recording Files |         |  |
| 3   | 2016-06-17 06:17:35 | DIAL      | "Mhammed" 2002 | 22222 [Trunk: UCM6202] | 0:00:05   | 0:00:05   | test3/Grandstream |        |           |                 |         |  |

**Figure 181: CDR Record**



## IAX SETTINGS

The UCM6200 IAX global settings can be accessed via Web GUI->**PBX**->**IAX Settings**.

### IAX Settings/General

Table 87: IAX Settings/General

|                                |  |
|--------------------------------|--|
| <b>Bind Port</b>               | Configure the port number that the IAX2 will be allowed to listen to. The default setting is 4569.   |
| <b>Bind Address</b>            | Configure the address that the IAX2 will be forced to bind to. The default setting is 0.0.0.0, which means all addresses.  |
| <b>IAX1 Compatibility</b>      | Select to configure IAX1 compatibility. The default setting is "No".   |
| <b>No Checksums</b>            | If selected, UDP checksums will be disabled and no checksums will be calculated/checked on systems supporting this features. The default setting is "No".  |
| <b>Delay Reject</b>            | If enabled, the IAX2 will delay the rejection of calls to avoid DOS. The default setting is "No".  |
| <b>ADSI</b>                    | Select to enable ADSI phone compatibility. The default setting is "No".  |
| <b>Music On Hold Interpret</b> | Specify which Music On Hold class this channel would like to listen to when being put on hold. This music class is only effective if this channel has no music class configured and the bridged channel putting the call on hold has no "Music On Hold Suggest" setting. |
| <b>Music On Hold Suggest</b>   | Specify which Music On Hold class to suggest to the bridged channel when putting the call on hold.   |
| <b>Bandwidth</b>               | Configure the bandwidth for IAX settings. The default setting is "Low".  |

### IAX Settings/Registration

Table 88: IAX Settings/Registration

| IAX Registration Options    |   |
|-----------------------------|---|
| <b>Min Reg Expire</b>       | Configure the minimum period (in seconds) of registration. The default setting is 60.   |
| <b>Max Reg Expire</b>       | Configure the maximum period (in seconds) of registration. The default setting is 3600. |
| <b>IAX Thread Count</b>     | Configure the number of IAX helper threads. The default setting is 10.                  |
| <b>IAX Max Thread Count</b> | Configure the maximum number of IAX threads allowed. The default setting is 100.        |



|                                 |   |
|---------------------------------|---|
| <b>Auto Kill</b>                | If set to "yes", the connection will be terminated if ACK for the NEW message is not received within 2000ms. Users could also specify number (in milliseconds) in addition to "yes" and "no". The default setting is "yes".   |
| <b>Authentication Debugging</b> | If enabled, authentication traffic in debugging will not show. The default setting is "No".   |
| <b>Codec Priority</b>           | Configure codec negotiation priority. The default setting is "Reonly". <ul style="list-style-type: none"> <li>• Caller<br/>Consider the callers preferred order ahead of the host's.</li> <li>• Host<br/>Consider the host's preferred order ahead of the caller's.</li> <li>• Disabled<br/>Disable the consideration of codec preference all together.</li> <li>• Reonly<br/>This is almost the same as "Disabled", except when the requested format is not available. The call will only be accepted if the requested format is available.</li> </ul> |
| <b>Type of Service</b>          | Configure ToS bit for preferred IP routing.   |
| <b>IAX Trunk Options</b>        |   |
| <b>Trunk Frequency</b>          | Configure the frequency of trunk frames (in milliseconds). The default setting is 20.   |
| <b>Trunk Time Stamps</b>        | If enabled, time stamps will be attached to trunk frames. The default setting is "No".  |

## IAX Settings/Static Defense

**Table 89: IAX Settings/Static Defense**

|                                     |   |
|-------------------------------------|---|
| <b>Call Token Optional</b>          | Enter a single IP address (e.g., 11.11.11.11) or a range of IP addresses (11.11.11.11/22.22.22.22) for which call token validation is not required. |
| <b>Max Call Numbers</b>             | Configure the maximum number of calls allowed for a single IP address.  |
| <b>Max Unvalidated Call Numbers</b> | Configure the maximum number of unvalidated calls for all IP addresses.   |
| <b>Call Number Limits</b>           | Configure to limit the number of calls for a give IP address of IP range.   |
| <b>IP or IP Range</b>               | Enter the IP address (11.11.11.11) or a range of IP addresses (11.11.11.11/22.22.22.22) to be considered for call number limits.                    |



## SIP SETTINGS

The UCM6200 SIP global settings can be accessed via Web GUI->**PBX**->**SIP Settings**.

### SIP Settings/General

Table 90: SIP Settings/General

|  |   |
|--|---|
| <b>Realm For Digest Authentication</b> | Configure the host name or domain name for the UCM6200. Realms MUST be globally unique according to RFC3261. The default setting is Grandstream.  |
| <b>Bind UDP Port</b>                   | Configure the UDP port used for SIP. The default setting is 5060.   |
| <b>Bind IP Address</b>                 | Configure the IP address to bind to. The default setting is 0.0.0.0, which means binding to all addresses.  |
| <b>Allow Guest Calls</b>               | <p>If enabled, the UCM6200 allows unauthorized INVITE coming into the PBX and the call can be made. The default setting is "No".</p> <p><b>Warning:</b><br/>Please be aware of the potential security risk when enabling "Allow Guest Calls" as this will allow any user with the UCM6200 address to dial into the UCM6200.</p> |
| <b>Allow Transfer</b>                  | If set to "No", all transfers initiated by the endpoint in the UCM6200 will be disabled (unless enabled in peers or users). The default setting is "Yes".   |
| <b>MWI From</b>                        | When sending MWI NOTIFY requests, this value will be used in the "From:" header as the "name" field. If no "From User" is configured, the "user" field of the URI in the "From:" header will be filled with this value.   |

### SIP Settings/MISC

Table 91: SIP Settings/Misc

| Outbound SIP Registrations        |  |
|-----------------------------------|--|
| <b>Register Timeout</b>           | Configure the register retry timeout (in seconds). The default setting is 20.  |
| <b>Register Attempts</b>          | Configure the number of registration attempts before the UCM6200 gives up. The default setting is 0, which means the UCM6200 will keep trying until the server side accepts the registration request.  |
| Video                             |  |
| <b>Max Bit Rate (kb/s)</b>        | Configure the maximum bit rate (in kb/s) for video calls. The default setting is 384.  |
| <b>Support SIP Video</b>          | Select to enable video support in SIP calls. The default setting is "Yes".   |
| <b>Reject Non-Matching INVITE</b> | If enabled, when rejecting an incoming INVITE or REGISTER request, the UCM6200 will always reject with "401 Unauthorized" instead of notifying the requester whether there is a matching user or peer for the request. This reduces the ability of an attacker to scan for valid SIP usernames. The default setting is "No". |





## SIP Settings/Session Timer

**Table 92: SIP Settings/Session Timer**

|                          |   |
|--------------------------|---|
| <b>Session Timers</b>    | <p>Select the session timer mode. The default setting is "Accept".</p> <p>The options are:</p> <ul style="list-style-type: none"> <li>• Originate<br/>Always request and run session timer.</li> <li>• Accept<br/>Run session timer only when requested by other UA.</li> <li>• Refuse<br/>Do not run session timer.</li> </ul> |
| <b>Session Expire</b>    | Configure the maximum session refresh interval (in seconds). The default setting is 1800.   |
| <b>Min SE</b>            | Configure the minimum session refresh interval (in seconds). The default setting is 90.   |
| <b>Session Refresher</b> | Select the session refresher to be UAC or UAS. The default setting is UAC.  |

## SIP Settings/TCP and TLS

**Table 93: SIP Settings/TCP and TLS**

|                            |   |
|----------------------------|---|
| <b>TCP Enable</b>          | Configure to allow incoming TCP connections with the UCM6200. The default setting is "No".  |
| <b>TCP Bind Address</b>    | Configure the IP address for TCP server to bind to. 0.0.0.0 means binding to all interfaces. The port number is optional. If not specified, 5060 will be used.  |
| <b>TLS Enable</b>          | Configure to allow incoming TLS connections with the UCM6200. The default setting is "No".  |
| <b>TLS Bind Address</b>    | <p>Configure the IP address for TLS server to bind to. 0.0.0.0 means binding to all interfaces. The port number is optional. If not specified, 5061 will be used.</p> <p><b>Note:</b></p> <p>The IP address must match the common name (hostname) in the certificate. Please do not bind a TLS socket to multiple IP addresses. For details on how to construct a certificate for SIP, please refer to the following document:<br/> <a href="http://tools.ietf.org/html/draft-ietf-sip-domain-certs">http://tools.ietf.org/html/draft-ietf-sip-domain-certs</a></p> |
| <b>TLS Client Protocol</b> | Select the TLS protocol for outbound client connections. The default setting is TLSv1.  |
| <b>TLS Do Not Verify</b>   | If enabled, the TLS server's certificate won't be verified when acting as a client. The default setting is "Yes".   |
| <b>TLS Self-Signed CA</b>  | This is the CA certificate if the TLS server being connected to requires self-signed certificate, including server's public key. This file will be renamed as "TLS.ca" automatically.   |



|                    |  |
|--------------------|--|
|                    | <b>Note:</b><br>The size of the uploaded ca file must be under 2MB.  |
| <b>TLS Cert</b>    | This is the Certificate file (*.pem format only) used for TLS connections. It contains private key for client and signed certificate for the server. This file will be renamed as "TLS.pem" automatically.<br><b>Note:</b><br>The size of the uploaded certificate file must be under 2MB. |
| <b>TLS CA Cert</b> | This file must be named with the CA subject name hash value. It contains CA's (Certificate Authority) public key, which is used to verify the accessed servers.<br><b>Note:</b><br>The size of the uploaded CA certificate file must be under 2MB.   |
| <b>TLS CA List</b> | Display a list of files under the CA Cert directory.   |

## SIP Settings/NAT

**Table 94: SIP Settings/NAT**

|                              |   |
|------------------------------|---|
| <b>External Host</b>         | Configure a static IP address and port (optional) used in outbound SIP messages if the UCM6200 is behind NAT. If it is a host name, it will only be looked up once.   |
| <b>Use IP address in SDP</b> | If enabled, the SDP connection will use the IP address resolved from the external host.   |
| <b>External TCP Port</b>     | Configure the externally mapped TCP port when the UCM6200 is behind a static NAT or PAT.  |
| <b>External TLS Port</b>     | Configures the externally mapped TLS port when UCM6200 is behind a static NAT or PAT.   |
| <b>Local Network Address</b> | Specify a list of network addresses that are considered inside of the NAT network. Multiple entries are allowed. If not configured, the external IP address will not be set correctly.<br>A sample configuration could be as follows:<br>192.168.0.0/16 |

## SIP Settings/TOS

**Table 95: SIP Settings/ToS**

|  |  |
|--|--|
| <b>ToS For SIP</b>                                 | Configure the Type of Service for SIP packets. The default setting is None.                                |
| <b>ToS For RTP Audio</b>                           | Configure the Type of Service for RTP audio packets. The default setting is None.                          |
| <b>ToS For RTP Video</b>                           | Configure the Type of Service for RTP video packets. The default setting is None.                          |
| <b>Default Incoming/Outgoing Registration Time</b> | Configure the default duration (in seconds) of incoming/outgoing registration. The default setting is 120. |
| <b>Max</b>   | Configure the maximum duration (in seconds) of incoming registration and                                   |



|   |   |
|---|---|
| <b>Registration/Subscription Time</b>     | subscription allowed by the UCM6200. The default setting is 3600.   |
| <b>Min Registration/Subscription Time</b> | Configure the minimum duration (in seconds) of incoming registration and subscription allowed by the UCM6200. The default setting is 60.  |
| <b>Enable Relaxed DTMF</b>                | Select to enable relaxed DTMF handling. The default setting is "No".  |
| <b>DTMF Mode</b>                          | Select DTMF mode to send DTMF. The default setting is RFC2833. If "Info" is selected, SIP INFO message will be used. If "Inband" is selected, 64-kbit codec PCMU and PCMA are required. When "Auto" is selected, "RFC2833" will be used if offered, otherwise "Inband" will be used. The default setting is "RFC2833".  |
| <b>RTP Timeout</b>                        | During an active call, if there is no RTP activity within the timeout (in seconds), the call will be terminated. The default setting is no timeout.<br><b>Note:</b><br>This setting doesn't apply to calls on hold.   |
| <b>RTP Hold Timeout</b>                   | When the call is on hold, if there is no RTP activity within the timeout (in seconds), the call will be terminated. This value of RTP Hold Timeout should be larger than RTP Timeout. The default setting is no timeout.  |
| <b>RTP Keep-alive</b>                     | This feature can be used to avoid abnormal call drop when the remote provider requires RTP traffic during proceeding.<br>For example, when the call goes into voicemail and there is no RTP traffic sent out from UCM, configuring this option can avoid voicemail drop.<br>When configured, RTP keep-alive packet will be sent to remote party at the configured interval. If set to 0, RTP keep-alive is disabled.  |
| <b>100rel</b>                             | Configure the 100rel setting on UCM6200. The default setting is "Yes".  |
| <b>Trust Remote Party ID</b>              | Configure whether the Remote-Party-ID should be trusted. The default setting is "No".   |
| <b>Send Remote Party ID</b>               | Configure whether the Remote-Party-ID should be sent or not. The default setting is "No".   |
| <b>Generate In-Band Ringing</b>           | Configure whether the UCM6200 should generate inband ringing or not. The default setting is "Never". <ul style="list-style-type: none"> <li>• <b>Yes:</b> The UCM6200 will send 180 Ringing followed by 183 Session Progress and in-band audio.</li> <li>• <b>No:</b> The UCM6200 will send 180 Ringing if 183 Session Progress has not been sent yet. If audio path is established already with 183 then send in-band ringing.</li> <li>• <b>Never:</b> Whenever ringing occurs, the UCM6200 will send 180 Ringing as long as 200OK has not been set yet. Inband ringing will not be generated even the end point device is not working properly.</li> </ul> |
| <b>Server User Agent</b>                  | Configure the user agent string for the UCM6200.  |




**Send Compact SIP  
Headers**


If enabled, compact SIP headers will be sent. The default setting is "No".



## PORTS CONFIG


The analog hardware (FXS port and FXO port) on the UCM6200 will be listed in this page. Click on  to edit signaling preference for FXS port or configure ACIM settings for FXO port.

Select "Loop Start" or "Kewl Start" for each FXS port. And then click on "Update" to save the change.

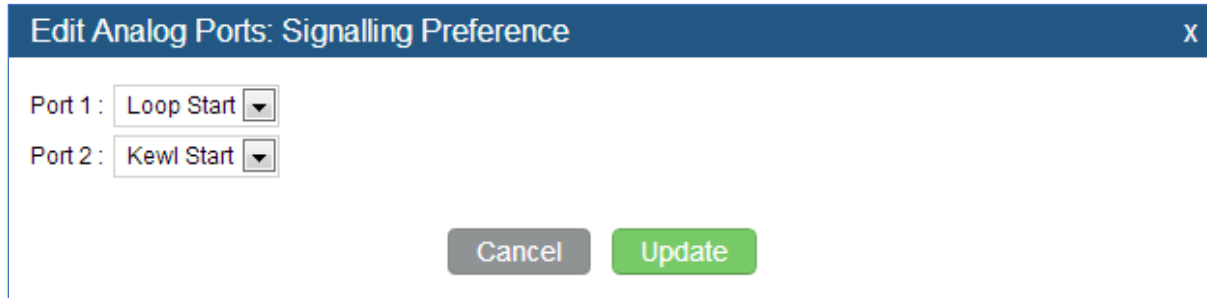

**Figure 182: FXS Ports Signaling Preference**

For FXO port, users could manually enter the ACIM settings by selecting the value from dropdown list for each port. Or users could click on "Detect" and choose the detection algorithm, two algorithm exists (ERL, Pr) for the UCM6200 to automatically detect the ACIM value. The detecting value will be automatically filled into the settings.

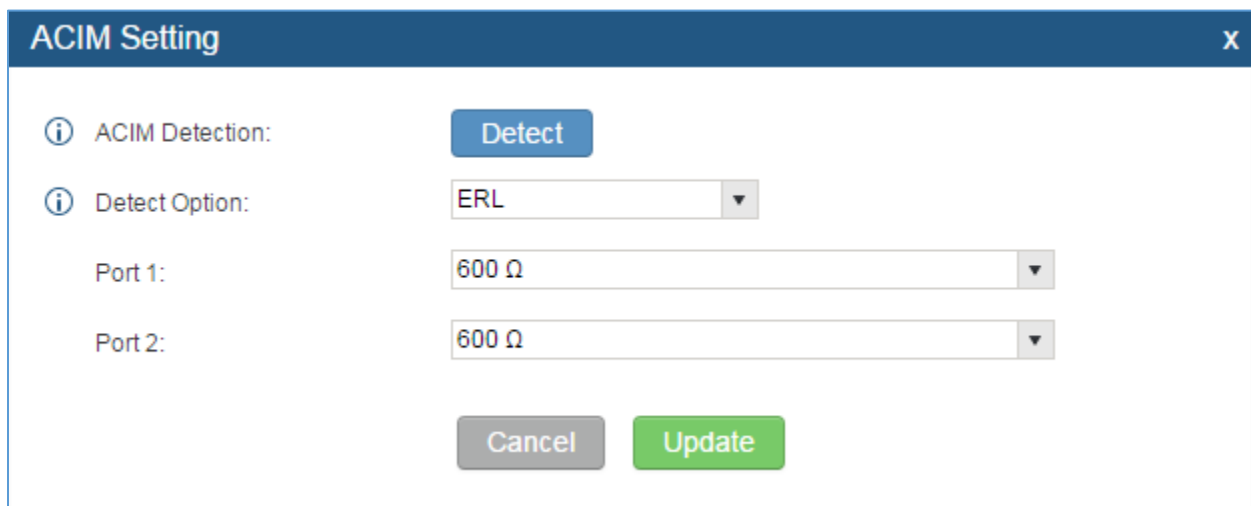

**Figure 183: FXO Ports ACIM Settings**

**Table 96: Internal Options/Ports Config**

|                    |  |
|--------------------|--|
| <b>Tone Region</b> | Select country to set the default tones for dial tone, busy tone, ring tone and etc to be sent from the FXS port. The default setting is "United States of America (USA)". |
|--------------------|--|



| Advanced Settings        |   |
|--------------------------|---|
| <b>FXO Opermode</b>      | Select country to set the On Hook Speed, Ringer Impedance, Ringer Threshold, Current Limiting, TIP/RING voltage adjustment, Minimum Operational Loop Current, and AC Impedance as predefined for your country's analog line characteristics. The default setting is "United States of America (USA)". |
| <b>FXS Opermode</b>      | Select country to set the On Hook Speed, Ringer Impedance, Ringer Threshold, Current Limiting, TIP/RING voltage adjustment, Minimum Operational Loop Current, and AC Impedance as predefined for your country's analog line characteristics. The default setting is "United States of America (USA)". |
| <b>FXS TISS Override</b> | <p>Configure to enable or disable override Two-Wire Impedance Synthesis (TISS). The default setting is No.</p> <p>If enabled, users can select the impedance value for Two-Wire Impedance Synthesis (TISS) override. The default setting is 600Ω.</p>   |
| <b>PCMA Override</b>     | <p>Select the codec to be used for analog lines. North American users should choose PCMU. All other countries, unless already known, should be assumed to be PCMA. The default setting is PCMU.</p> <p><b>Note:</b><br/>This option requires system reboot to take effect.</p>                        |
| <b>Boost Ringer</b>      | Configure whether normal ringing voltage (40V) or maximum ringing voltage (89V) for analog phones attached to the FXS port is required. The default setting is "Normal".  |
| <b>Fast Ringer</b>       | Configure to increase the ringing speed to 25HZ. This option can be used with "Low Power" option. The default setting is "Normal".  |
| <b>Low Power</b>         | Configure the peak voltage up to 50V during "Fast Ringer" operation. This option is used with "Fast Ringer". The default setting is "Normal".   |
| <b>Ring Detect</b>       | If set to "Full Wave", false ring detection will be prevented for lines where Caller ID is sent before the first ring and proceeded by a polarity reversal, as in UK. The default setting is "Standard".  |
| <b>FXS MWI Mode</b>      | <p>Configure the type of Message Waiting Indicator on FXS lines. The default setting is "FSK".</p> <ul style="list-style-type: none"> <li>• FSK: Frequency Shift Key Indicator</li> <li>• NEON: Light Neon Bulb Indicator.</li> </ul>   |




## VALUE-ADDED FEATURES

### FAX Sending

The UCM6200 supports sending Fax via web UI access. This feature can be found on web UI->**PBX->Value-added Features->Fax Sending** page. In order to send fax, pre-setup for analog trunk and outbound route is required. Please refer to [\[Analog Trunks\]](#), [\[VOIP Trunks\]](#) and [\[Outbound Routes\]](#) sections for configuring analog trunk and outbound route.

After making sure analog trunk or VoIP Trunk is setup properly and UCM6200 can reach out to PSTN numbers via the trunk, on Fax Sending page, enter the fax number and upload the file to be faxed. Then click on “Send” to start. The progress of sending fax will be displayed in web UI. Users can also view the sending history in the same web page.

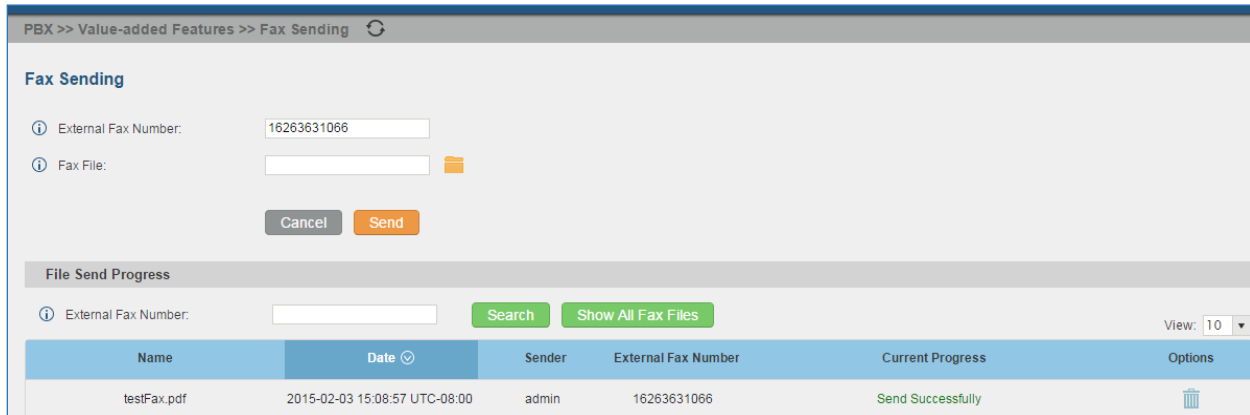

| Name        | Date                          | Sender | External Fax Number | Current Progress  | Options |
|-------------|-------------------------------|--------|---------------------|-------------------|---------|
| testFax.pdf | 2015-02-03 15:08:57 UTC-08:00 | admin  | 16263631066         | Send Successfully |         |

Figure 184: Fax Sending in Web UI

### Announcements Center

The UCM6200 supports Announcements Center feature which allows users to pre-record and store voice message into UCM6200 with a specified code. The users can also create group with specified extensions. When the code and the group number are dialed together in the combination of **code + group number**, the specified voice message is sent to all group members and only extensions in the group will hear the voice message.



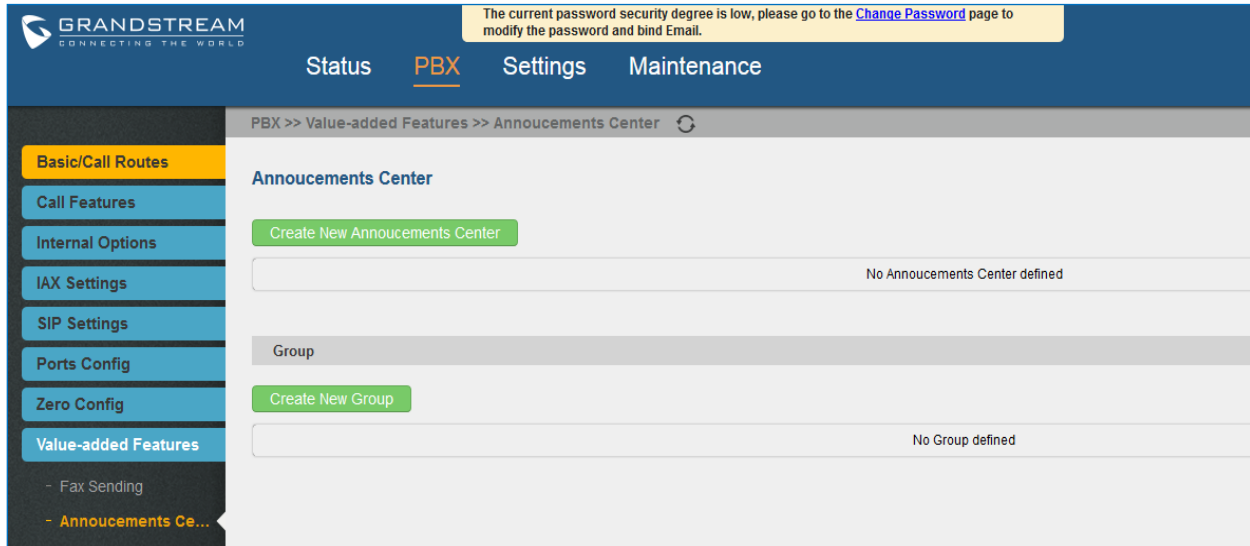


Figure 185: Announcements Center

## Announcements Center Settings

Table 97: Announcements Center Settings

|                      |  |
|----------------------|--|
| <b>Name</b>          | Configure a name for the newly created Announcements Center to identify this announcement center.  |
| <b>Code</b>          | <p>Enter a code number for the custom prompt. This code will be used in combination with the group number. For example, if the code is 55, and group number is 666. The user can dial 55666 to send prompt 55 to all members in group 666.</p> <p><b>Note:</b><br/>The combination number must not conflict with any number in the system such as extension number or conference number.</p> |
| <b>Custom Prompt</b> | This option is to set a custom prompt as an announcement to notify group members. The file can be uploaded from page 'Custom Prompt'. Click 'Prompt' to add additional record.   |
| <b>Ring Timeout</b>  | Configure the ring timeout for the group members. The default value is 30 seconds.   |






## Group Settings

Table 98: Group Settings

|               |   |
|---------------|---|
| <b>Name</b>   | Configure a name for the newly created group to identify the group.   |
| <b>Number</b> | <p>Configure the group number. The group number is used in combination with the code. For example, if group number is 666, and code is 55. The user can dial 55666 to send prompt 55 to all members in group 666.</p> <p><b>Note:</b><br/>The combination number must not conflict with any number in the system such as extension number or conference number.</p> |

Announcements Center feature can be found under **web UI->PBX->Value-added Features-> Announcements Center**. The following example demonstrates the usage of this feature.

1. Click  to create new group.
2. Give a name to the newly created group.
3. Create a group number which is used with code to send voice message.
4. Select the extensions to be included in the group, who will receive the voice message.

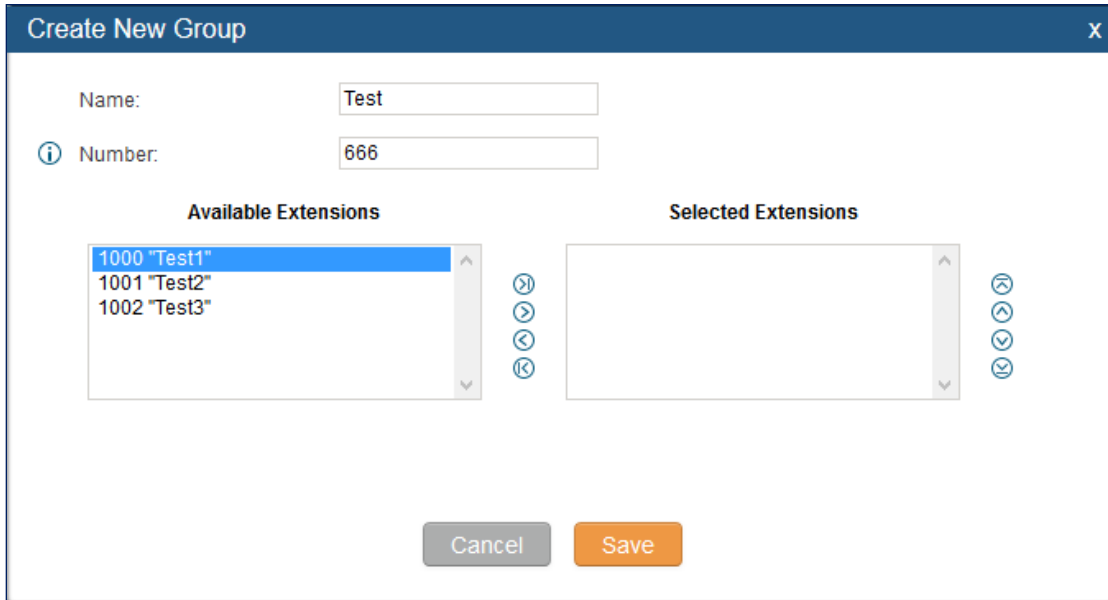



Figure 186: Announcements Center Group Configuration

In this example, group “Test” has number 666. Extension 1000, 1001 and 1002 are in this group.

5. Click  to create a new Announcement Center.



6. Give a name to the newly created Announcement Center.
7. Specify the code which will be used with group number to send the voice message to.
8. Select the message that will be used by the code from the Custom Prompt drop down menu. To create a new Prompt, please click “Prompt” link and follow the instructions in that page.

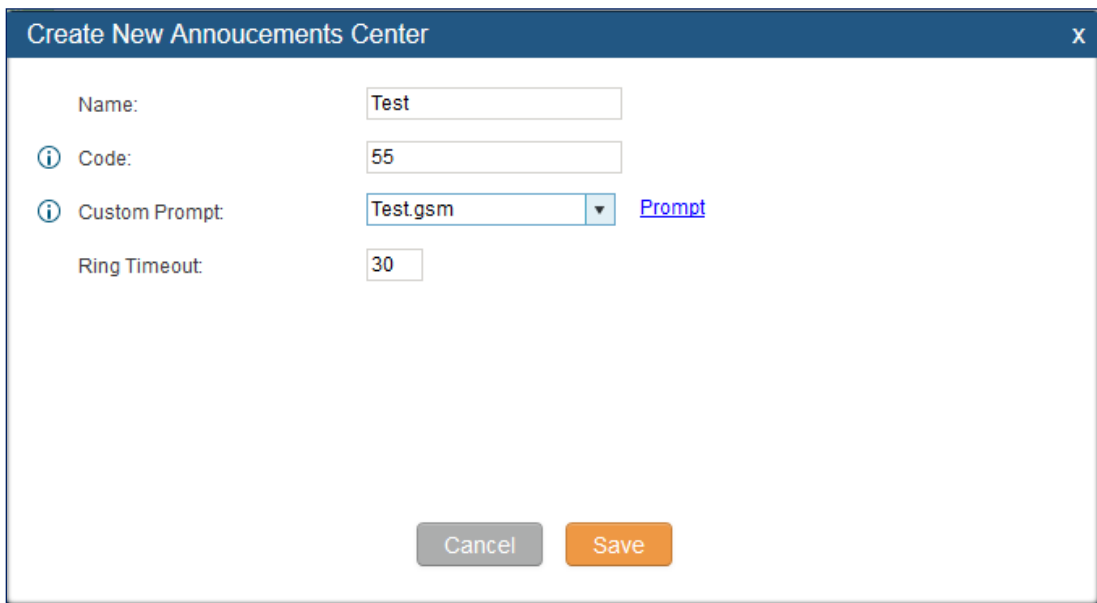

**Create New Announcements Center**

Name:


**i** Code:

**i** Custom Prompt:  [Prompt](#)

Ring Timeout:

**Figure 187: Announcements Center Code Configuration**

Code and Group number are used together to direct specified message to the target group. All extensions in the group will receive the message. For example, we can send code 55 to group 666 by dialing 55666 from any extension registered to the UCM6200. All the members in group 666 which are extension 1000, 1001 and 1002 will receive this voice message after they pick up the call.

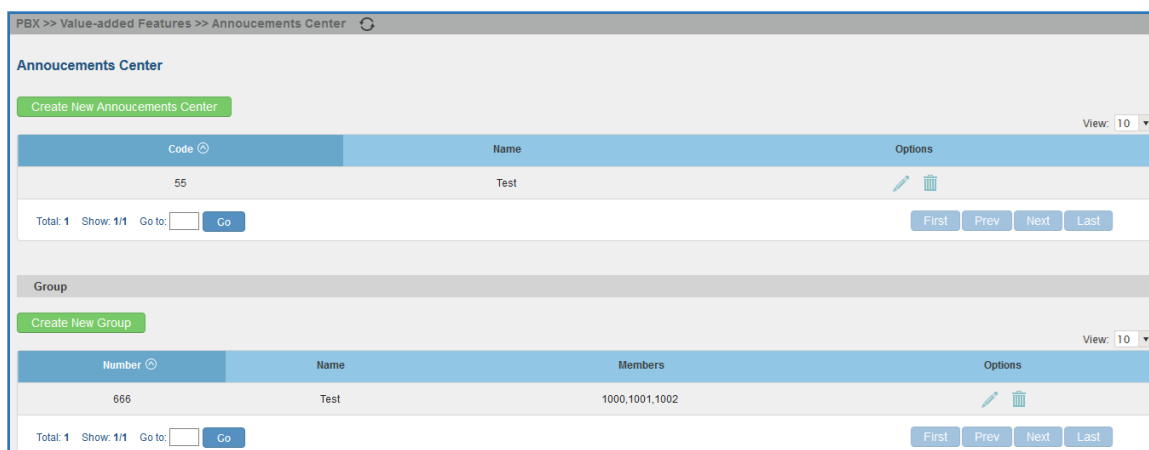

PBX >> Value-added Features >> Announcements Center

**Announcements Center**

[Create New Announcements Center](#)

| Code | Name | Options                                     |
|------|------|---|
| 55   | Test | <a href="#">Edit</a> <a href="#">Delete</a> |

Total: 1 Show: 1/1 Go to:   [First](#) [Prev](#) [Next](#) [Last](#)

**Group**

[Create New Group](#)

| Number | Name | Members        | Options                                     |
|--------|------|----------------|---|
| 666    | Test | 1000,1001,1002 | <a href="#">Edit</a> <a href="#">Delete</a> |

Total: 1 Show: 1/1 Go to:   [First](#) [Prev](#) [Next](#) [Last](#)

**Figure 188: Announcements Center Example**



## PMS

UCM6200 Series support Hotel Property Management System PMS, including check-in/check-out services, wakeup calls, room status, Do Not Disturb which provide an ease of management for hotel applications. This feature can be found on web UI->**PBX->PMS**.

**Note:** The PMS integration on UCM was made with HMobile/Mitel for now; more PMS software might be supported in future releases.

PMS system supports the following features:

**Table 99: PMS Supported Features**

| Feature                 | Mitel | HMobile |
|-------------------------|-------|---------|
| Check-In                | ✓     | ✓       |
| Check-out               | ✓     | ✓       |
| Wake-up Call            | ✓     | ✓       |
| Name Change             | ✓     | ✗       |
| Update                  | ✗     | ✓       |
| Set Credit              | ✓     | ✗       |
| Set Station Restriction | ✓     | ✗       |
| Room Status             | ✗     | ✓       |
| Room Move               | ✗     | ✓       |
| Do Not Disturb          | ✗     | ✓       |
| Mini Bar                | ✗     | ✓       |
| MSG                     | ✗     | ✓       |

In order to use all PMS features please activate the feature code associated under “**PBX->Internal Options->Feature Codes**”

- Enable PMS
- Update PMS Room Status
- PMS Wake Up Service Activate
- PMS Wake Up Service Deactivate

### Basic Settings

On the UCM WebGUI under “**PBX->PMS->Basic Settings**” set the connection information for the HMobile platform.




**Table 100: PMS Basic Settings**

| Field                 | Description   |
|-----------------------|---|
| <b>PMS Module</b>     | Users can select the desired PMS module from the drop down list.<br>Hmobile.<br>Mitel.                        |
| <b>Wake Up Prompt</b> | Prompt used when answering the wakeup calls it can be customized from<br>"PBX>Internal Options>Custom Propmpt |
| <b>PMS URL</b>        | Enter the PMS system URL  |
| <b>UCM Port</b>       | Enter the Port used by the PMS system   |
| <b>Username</b>       | Enter the Username to connect to the PMS system   |
| <b>Password</b>       | Enter the password to connect to the PMS system   |


## Room Status

User can create Rooms by clicking on [Create New Room](#), the following Figure will be displayed then.

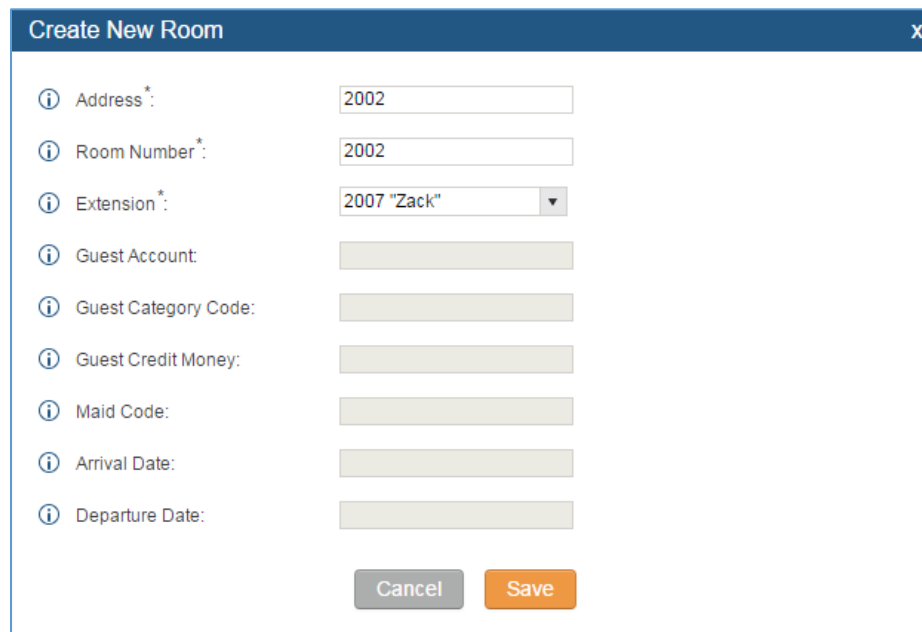
**Figure 189: Create New Room**


Click "Save" to create the new room, the fields above can be configured from the HMobile platform, once set the following screen will be shown:



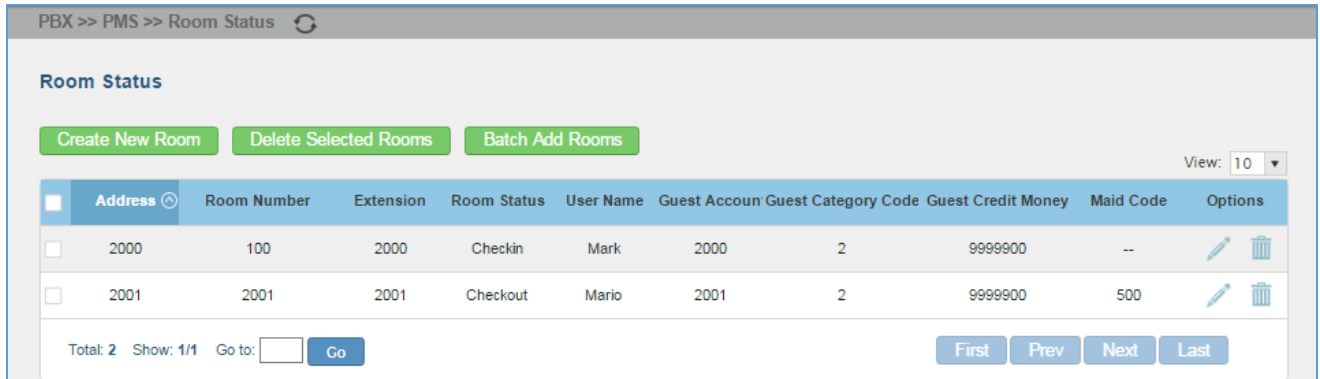

**Figure 190: Room Status**

User can Create a Batch of rooms as well by clicking on [Batch Add Rooms](#), the following window will pop up:

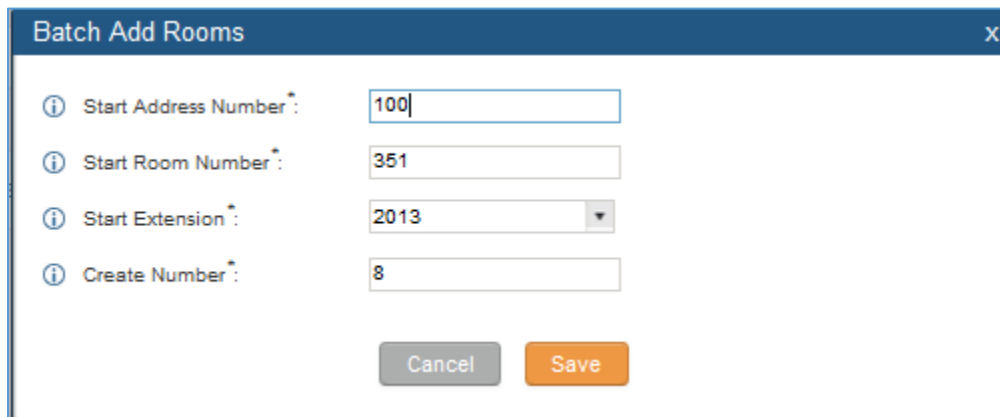

**Figure 191: Add batch rooms**

## Wake Up Service

In order to create a New Wake up service, user can click on [Create New Wake Up Service](#), the following window will pop up:



**Create New Wake Up Service**

Room Number : 2000

Time : 2016/06/24 06:29

Action Status: Programmed

Type: Single

Cancel Save

Figure 192: Create New Wake Up Service

Table 101: PMS Wake up Service

| Field         | Description   |
|---------------|---|
| Room Number   | Select the room number where to call  |
| Time          | Set the time of the wakeup call   |
| Action Status | Show the status of the call: <ul style="list-style-type: none"> <li>Programmed: the call is scheduled for the time set</li> <li>Cancelled: the call is canceled</li> <li>Executed: the wakeup call is made</li> </ul> |
| Type          | <ul style="list-style-type: none"> <li>Single: The call will be made once on the specific time.</li> <li>Daily: The call will be repeated every day on the specific time</li> </ul>                                   |

Once the call is made on the time specified, the following figure show the status of the wakeup call.

| Room Number | Action Status | Type   | Answer Status | Date       | Time  | Options |
|-------------|---------------|--------|---------------|------------|-------|---------|
| 350         | Executed      | Single | Busy          | 2016/06/24 | 06:27 |         |

Total: 1 Show: 1/1 Go to:  Go First Prev Next Last


Figure 193: Wakeup Call executed

This call has been executed but has been rejected, that why we can see the “**Busy**” status.



## Mini Bar

In order to create a new mini bar, click on **Create New Mini Bar** under UCM webGUI -> **PBX** -> **PMS** -> **Mini Bar**, the following window will pop up :

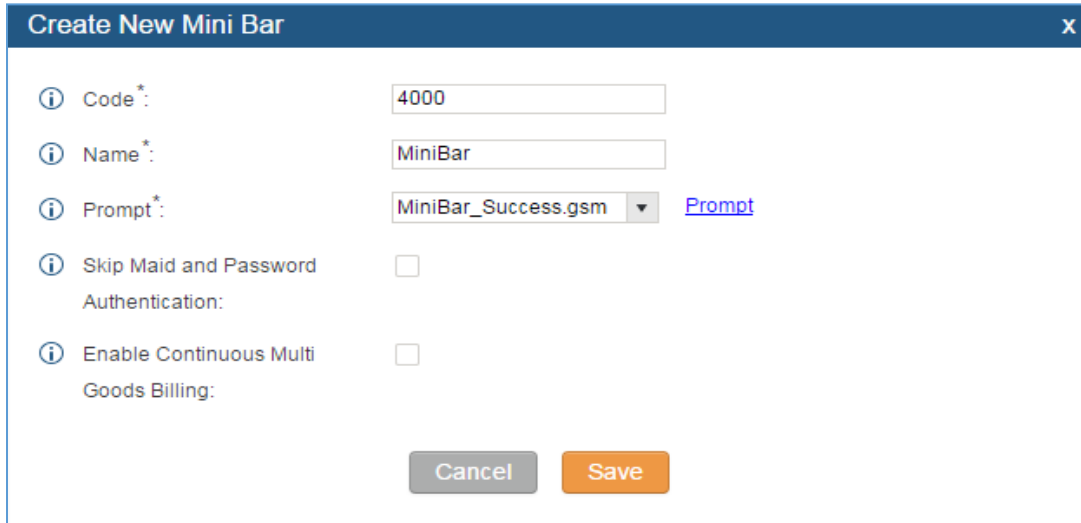


**Figure 194: Create New Mini Bar**

**Table 102: Create New Mini Bar**

|  |   |
|--|---|
| <b>Code</b>                                  | Enter a non-existing extension number to be dialed when using the mini bar feature.   |
| <b>Name</b>                                  | Enter a name for the mini bar.  |
| <b>Prompt</b>                                | Select the Prompt to play once connected to the mini bar.   |
| <b>Skip Maid and Password Authentication</b> | If enabled, the default maid code will be 0000, no authentication is required.(enter 0000 followed by # to access the consumer goods) |
| <b>Enable Continuous Multi Goods Billing</b> | If enabled, please separate the goods' codes by*.   |

In order to create a new maid, click on **Create New Maid** under UCM webGUI -> **PBX** -> **PMS** -> **Mini Bar**, the following window will popup.



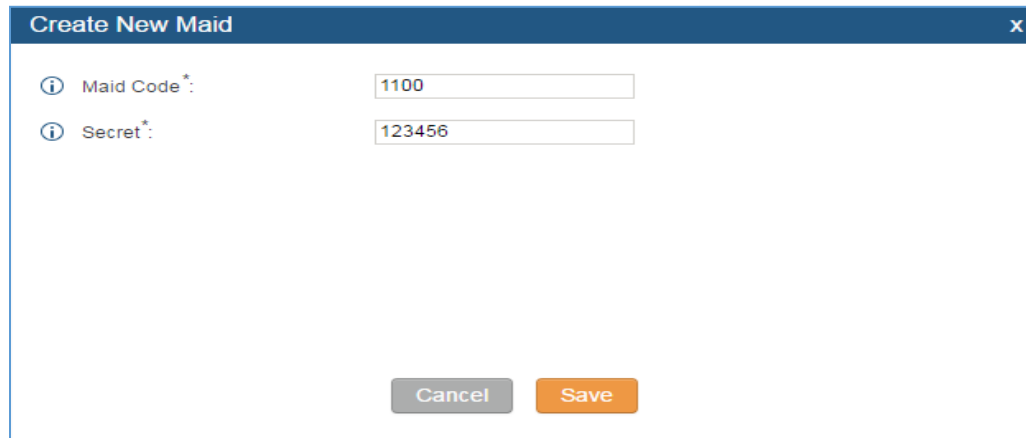


**Figure 195: Create New Maid**

**Table 103: Create New Maid**

|                  |   |
|------------------|---|
| <b>Maid Code</b> | Enter the Code to use when the maid want to use the Mini Bar. |
| <b>Secret</b>    | Enter the password associated with the maid.                  |

In order to create a new consumer goods, click on [Create New Consumer Goods](#) under UCM webGUI - > **PBX** -> **PMS** -> **Mini Bar**, the following window will popup.

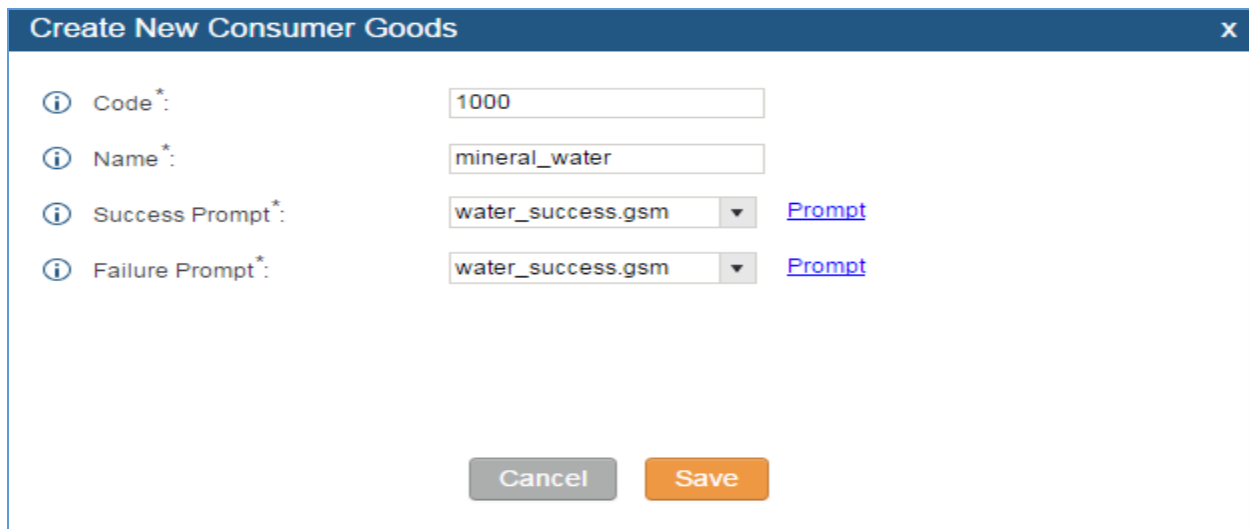

**Figure 196: Create New Consumer Goods**

|                       |  |
|-----------------------|--|
| <b>Code</b>           | Enter the Goods Code.  |
| <b>Name</b>           | Enter the Name of the Goods  |
| <b>Success Prompt</b> | Select the success prompt when typing the code of the goods by the maid. |





**Failure Prompt** Select the failure prompt.

The Minibar page look like the following:

**Mini Bar**

Create New Mini Bar
View: 10 ▾

| Code | Name ↕  | Options   |
|------|---------|---|
| 4000 | MiniBar | <span style="font-size: 1.2em;">✎</span> <span style="font-size: 1.2em;">🗑</span> |

Total: 1 Show: 1/1 Go to:  Go

First
Prev
Next
Last

Create New Maid
View: 10 ▾

| Maid Code ↕ | Secret | Options   |
|-------------|--------|---|
| 1100        | 123456 | <span style="font-size: 1.2em;">✎</span> <span style="font-size: 1.2em;">🗑</span> |

Total: 1 Show: 1/1 Go to:  Go

First
Prev
Next
Last

Create New Consumer Goods
View: 10 ▾

| Code | Name ↕        | Options   |
|------|---------------|---|
| 1003 | emergency     | <span style="font-size: 1.2em;">✎</span> <span style="font-size: 1.2em;">🗑</span> |
| 1000 | mineral_water | <span style="font-size: 1.2em;">✎</span> <span style="font-size: 1.2em;">🗑</span> |

**Figure 197: Mini Bar**




## CRM

**Customer relationship management (CRM)** is a term that refers to practices, strategies and technologies that companies use to manage and analyze customer interactions and data throughout the customer lifecycle, with the goal of improving business relationships with customers.

The UCM6200 support two CRM API, SugarCRM and Salesforce CRM, which allows users to look for contact information in the Contacts, Leads and / or Accounts tables, shows the contact record in CRM page, and saves the call information in the contact's history.

### SugarCRM

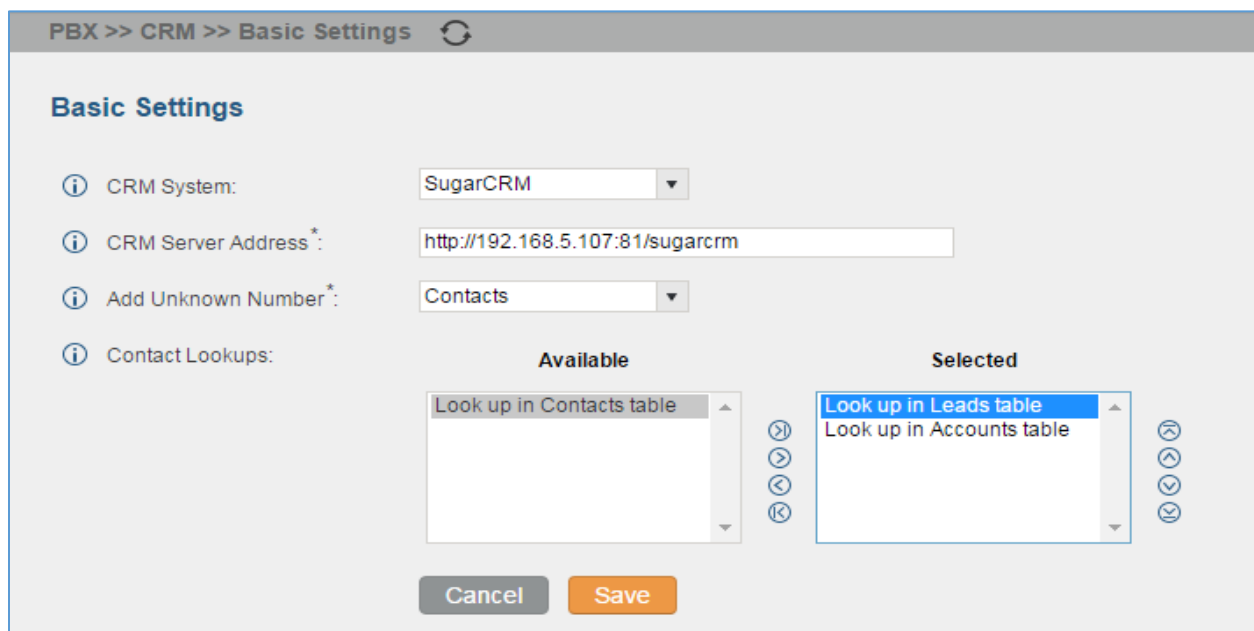

Configuration page of the SugarCRM can be accessed via admin login, on the UCM webGUI under “PBX -> CRM -> Basic Settings”.



**Figure 198: SugarCRM Basic Settings**

Select “SugarCRM” from the CRM System Dropdown in order to use SugarCRM.

**Table 104: SugarCRM Settings**

|                           |  |
|---------------------------|--|
| <b>CRM System</b>         | Select a CRM system from the Drop down, two CRM systems are available: Salesforce and SugarCRM.  |
| <b>CRM Server Address</b> | Enter the IP address of the CRM server.  |
| <b>Add Unknown Number</b> | Add the new number to this module if it can't be found in the selected module.   |
| <b>Contact Lookups</b>    | Select from the “ <b>Available</b> ” list of lookups and press   to select where the UCM can perform the lookups on the CRM tables, Leads, Accounts, and Contacts. |




Once settings on admin access are configured:

- Click on **Save** and **Apply Changes**.
- Logout from admin access.
- Login to the UCM as user and navigate under “User Portal -> Value-added Feature -> CRM User Settings”.

Click on “**Enable CRM**” and enter the username/password associated with the CRM account then click on **Save** and **Apply Changes**. The status will change from “Logged Out” to “Logged In”.

User can start then using SugarCRM features.

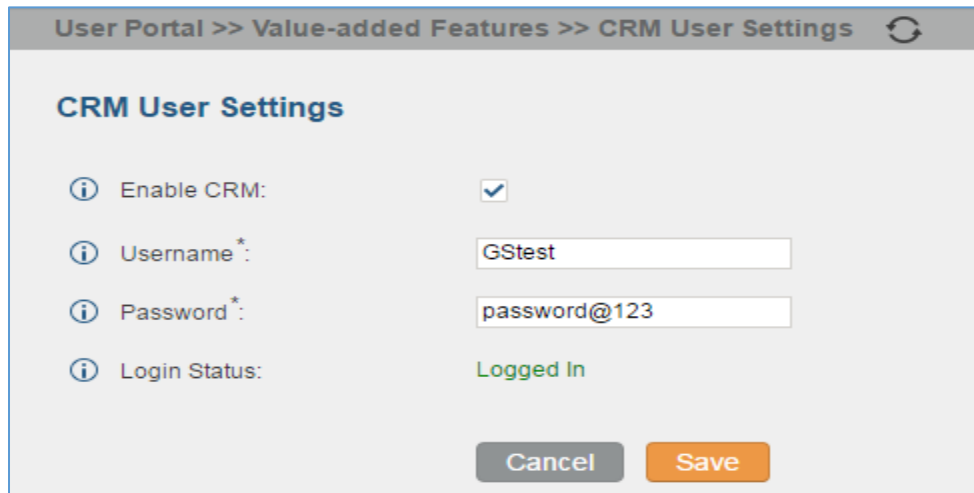

The screenshot shows the 'CRM User Settings' configuration page. The breadcrumb trail at the top reads 'User Portal >> Value-added Features >> CRM User Settings'. The page title is 'CRM User Settings'. There are four settings listed:

- Enable CRM:** A checkbox that is checked.
- Username \*:** A text input field containing 'GStest'.
- Password \*:** A text input field containing 'password@123'.
- Login Status:** A status indicator showing 'Logged In' in green text.


At the bottom of the form, there are two buttons: a grey 'Cancel' button and an orange 'Save' button.

Figure 199: CRM User Settings

## Salesforce CRM

Configuration page of the Salesforce CRM can be accessed via admin login, on the UCM webGUI under “PBX -> CRM -> Basic Settings”.



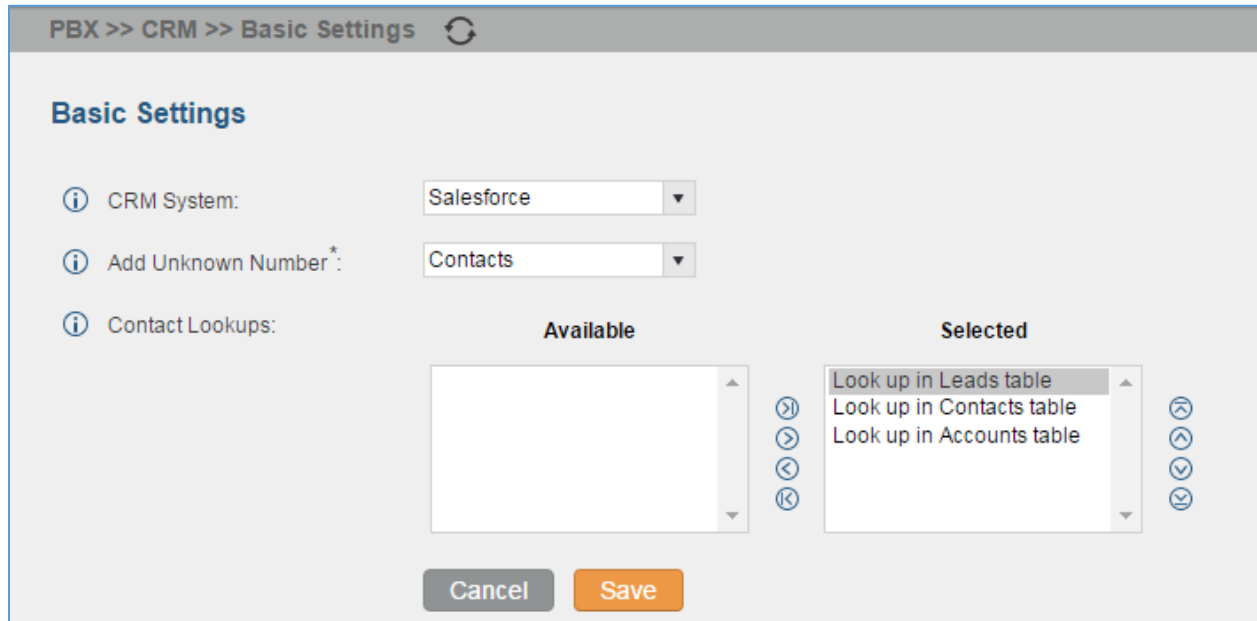





**Figure 200: Salesforce Basic Settings**



Select “Salesforce” from the CRM System Dropdown in order to use Salesforce CRM.

**Table 105: Salesforce Settings**

|                           |  |
|---------------------------|--|
| <b>CRM System</b>         | Select a CRM system from the Drop down, two CRM systems are available: Salesforce and SugarCRM.  |
| <b>Add Unknown Number</b> | Add the new number to this module if it can't be found in the selected module.   |
| <b>Contact Lookups</b>    | Select from the “ <b>Available</b> ” list of lookups and press   to select where the UCM can perform the lookups on the CRM tables, Leads, Accounts, and Contacts. |


Once settings on admin access are configured:

- Click on  and .
- Logout from admin access.
- Login to the UCM as user and navigate under “User Portal -> Value-added Feature -> CRM User Settings”.


Click on “**Enable CRM**” and enter the **username**, **password** and **Security Token** associated with the CRM account then click on  and . The status will change from “Logged Out” to “Logged In”.


User can start then using Salesforce CRM features.





User Portal >> Value-added Features >> CRM User Settings 


### CRM User Settings

 Enable CRM:

 Username\*:

 Password\*:

 Security Token\*:

 Login Status: Logged In

**Figure 201: Salesforce User Settings**


After calling the outbound number (0655443322). The CRM will automatically record the new number to Contacts



## STATUS AND REPORTING

### PBX Status

The UCM6200 monitors the status for Trunks, Extensions, Queues, Conference Rooms, Interfaces and Parking lot. It presents administrators the real time status in different sections under web GUI->**Status->PBX Status**.

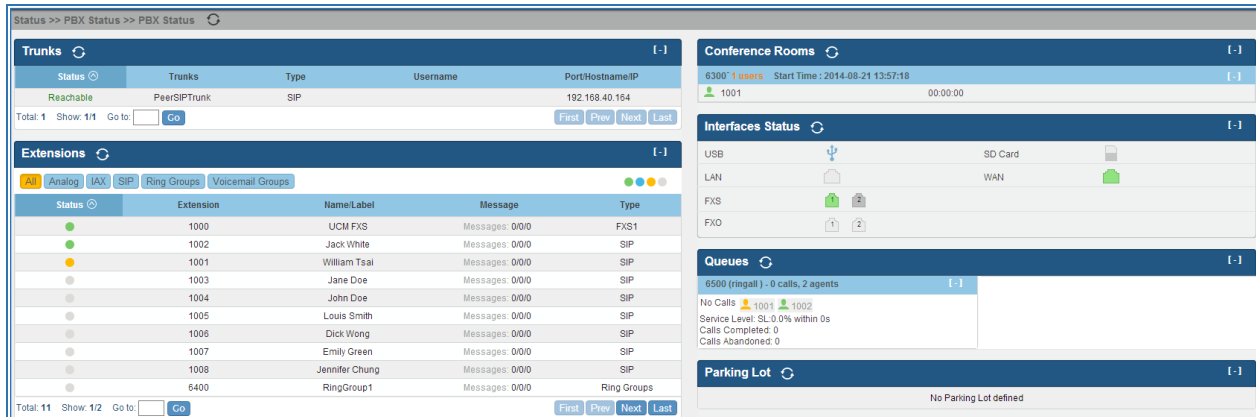

The screenshot displays the PBX Status web GUI with the following sections:

- Trunks:** A table showing trunk status with columns for Status, Trunks, Type, Username, and Port/Hostname/IP. The status is 'Reachable' and the peer is 'SIPTrunk'.
- Extensions:** A table listing extensions with columns for Status, Extension, Name/Label, Message, and Type. Extensions include UCM FXS, Jack White, William Tsai, Jane Doe, John Doe, Louis Smith, Dick Wong, Emily Green, Jennifer Chung, and RingGroup1.
- Conference Rooms:** Shows 6300 users and a start time of 2014-08-21 13:57:18.
- Interfaces Status:** Shows status for USB, LAN, FXS, and FXD.
- Queues:** Shows 6500 (ringall) with 0 calls and 2 agents.
- Parking Lot:** Shows 'No Parking Lot defined'.

Figure 202: Status->PBX Status

### Trunks

Users could see all the configured trunk status in this section.

| Status      | Trunks      | Type   | Username | Port/Hostname/IP |
|-------------|-------------|--------|----------|------------------|
| Unmonitored | Grandstream | SIP    |          | 192.168.40.140   |
| Unavailable | Trunk1      | Analog |          | Ports 1          |

Figure 203: Trunk Status


Table 106: Trunk Status

| Status | Display trunk status.  |
|--------|--|
|        | <ul style="list-style-type: none"> <li>Analog trunk status:                             <ul style="list-style-type: none"> <li><b>Available</b></li> <li><b>Busy</b></li> <li><b>Unavailable</b></li> <li><b>Unknown Error</b></li> </ul> </li> <li>SIP Peer trunk status:                             <ul style="list-style-type: none"> <li><b>Unreachable:</b> The hostname cannot be reached.</li> </ul> </li> </ul> |




|                         |  |
|-------------------------|--|
|                         | <b>Unmonitored:</b> QUALIFY feature is not turned on to be monitored.<br><b>Reachable:</b> The hostname can be reached. <ul style="list-style-type: none"> <li>SIP Register trunk status:             <ul style="list-style-type: none"> <li><b>Registered</b></li> <li><b>Unrecognized Trunk</b></li> </ul> </li> </ul> |
| <b>Trunks</b>           | Display trunk name   |
| <b>Type</b>             | Display trunk Type: <ul style="list-style-type: none"> <li>Analog</li> <li>SIP</li> <li>IAX</li> </ul>   |
| <b>Username</b>         | Display username for this trunk.   |
| <b>Port/Hostname/IP</b> | Display Port for analog trunk, or Hostname/IP for VoIP (SIP/IAX) trunk.  |

Other operations are also available in trunk status section:

- Click on "Trunks", the web page will redirect to trunk configuration page which can also be accessed via web GUI->**PBX->Basic/Call Routes->Analog Trunks**.
- Click on  to refresh the trunk status.
- Click on [ + ] to expand the status detail table.
- Click on [ - ] to hide the status detail table.

## Extensions

Extensions in this section will be automatically sorted based on their status: idle, ringing, talking or unavailable, and display them accordingly on the web UI status section.











| Status  | Extension | Name/Label | Message         | Type |
|---|-----------|------------|-----------------|------|
|  | 1000      |            | Messages: 0/0/0 | SIP  |
|  | 1002      |            | Messages: 0/0/0 | SIP  |
|  | 1001      |            | Messages: 0/0/0 | SIP  |
|  | 2000      |            | Messages: 0/0/0 | SIP  |








Figure 204: Extension Status

Table 107: Extension Status



|                   |  |
|-------------------|--|
| <b>Status</b>     | <p>Display extension number (including feature code). The color indicator has the following definitions.</p> <ul style="list-style-type: none"> <li> Green: Free</li> <li> Blue: Ringing</li> <li> Yellow: In Use</li> <li> Grey: Unavailable</li> </ul> |
| <b>Extension</b>  | Display the extension number.  |
| <b>Name/Label</b> | First name and last name of the extension.   |
| <b>Message</b>    | <p>Display message status for the extension.<br/>           Example: 2/4/1<br/>           Description: There are 2 urgent messages, 4 messages in total and 1 message that has been already read.</p>  |
| <b>Type</b>       | <p>Displays extension type.</p> <ul style="list-style-type: none"> <li>SIP User</li> <li>IAX User</li> <li>Analog User</li> <li>Ring Groups</li> <li>Voicemail Groups</li> </ul>   |

Other operations are also available in extension status section:


- Click on "Extensions", the web page will redirect to extension configuration page which can also be accessed via web GUI->**PBX->Basic/Call Routes->Extensions**.
- Click on  to refresh the extension status.
- Click on one of the tabs       to display the corresponding extensions accordingly.
- Click on [ + ] to expand the status detail table.
- Click on [ - ] to hide the status detail table.

## Queues

Users could see all the configured call queue status in this section. The following figure shows the call queue 6500 being in used.





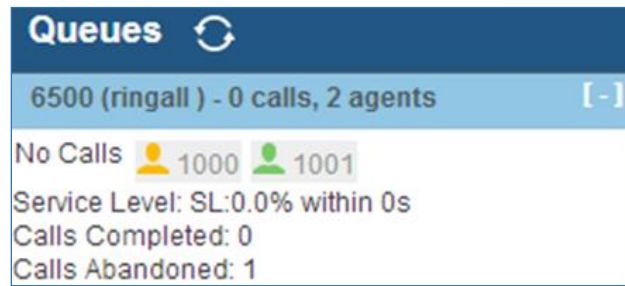





**Figure 205: Queue Status**


The current call status (caller ID, duration), agent status, service level, calls summary (completed/abandoned) are shown for the call queue. The agent status is defined as below.

**Table 108: Agent Status**

|   |                                |
|---|--------------------------------|
|  | The agent is available/idle.   |
|  | The agent is ringing.          |
|  | The agent is talking/busy.     |
|  | The agent has been logged out. |


On the UCM6200, **Service Level** is defined as the percentage of high-quality calls over all calls in the call queue, where high-quality call means calls answered within 10 seconds.

Other operations are also available in queue status section:

- Click on "Queues", the web page will redirect to call queue configuration page which can also be accessed via web GUI->**PBX**->**Call Features**->**Call Queue**.
- Click on  to refresh the call queue status.
- Click on [ + ] to expand the call queue detail.
- Click on [ - ] to hide the call queue detail.


## Conference Rooms

Users could see all the conference room status in this section. It shows all the configured conference rooms, current users, call duration for each user and conference call.

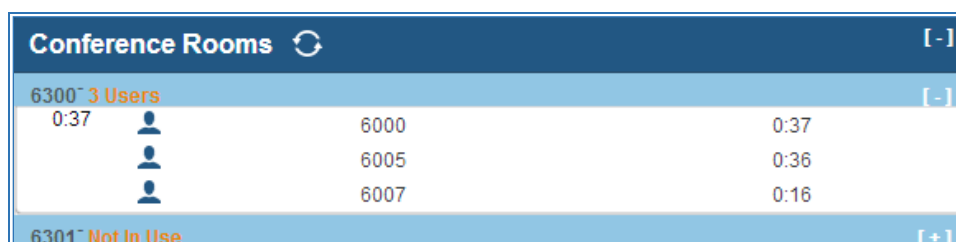

**Figure 206: Conference Room Status**

Other operations are also available in conference room status section:

- Click on "Conference Rooms", the web page will redirect to conference room configuration page which can also be accessed via web GUI->**PBX->Call Features->Conference**.
- Click on  to refresh the conference room status.
- Click on [ + ] to expand the conference room details.
- Click on [ - ] to hide the conference room details.









## Interfaces Status





This section displays interface/port connection status on the UCM6200. The following example shows the interface status for UCM6204 with USB, WAN port, FXS1, FXS2 and FXO1 connected.




**Figure 207: UCM6204 Interfaces Status**

**Table 109: Interface Status Indicators**

|   |                         |
|---|-------------------------|
|  | USB connected.          |
|  | USB disconnected.       |
|  | SD Card connected.      |
|  | SD Card disconnected.   |
|  | LAN/WAN connected.      |
|  | LAN/WAN not configured. |
|  | LAN/WAN disconnected.   |
|  | FXS/FXO connected.      |

|   |                         |
|---|-------------------------|
|  | FXS/FXO waiting.        |
|  | FXS/FXO busy.           |
|  | FXS/FXO not configured. |
|  | FXS/FXO disconnected.   |

Other operations are also available in interface status section:

- Click on "Interfaces Status", the web page will redirect to ports configuration page which can also be accessed via web GUI->**PBX->Internal Options->Ports Config**.
- Click on  to refresh the interface status.
- Click on [ + ] to expand the interface details.
- Click on [ - ] to hide the interface details.

## Parking Lot

The UCM6200 supports call park using feature code. When there is call being parked, this section will display the parking lot status.



| Parking Lot  |                   |           |         | [-] |
|---|-------------------|-----------|---------|-----|
| Caller ID   | Channel           | Extension | Timeout |     |
| 6010  | SIP/6010-00000050 | 701       | 96      |     |
| 6005  | SIP/6005-00000052 | 702       | 113     |     |

Figure 208: Parking Lot Status

Table 110: Parking Lot Status

|                  |  |
|------------------|--|
| <b>Caller ID</b> | Display the caller ID who parks the call.  |
| <b>Channel</b>   | Display channel for the call park.   |
| <b>Extension</b> | Display the parking lot number where the call is parked/retrieved.   |
| <b>Timeout</b>   | Display timeout (in seconds) for the parked call. The status page will dynamically update this timer from 120 seconds (default) to 0. When the timer reaches 0, the caller who parks the call will be called back. |

Other operations are also available in parking lot status section:

- Click on "Parking Lot", the web page will redirect to feature codes page which can also be accessed via web GUI->**PBX->Internal Options->Feature Codes**.
- Click on  to refresh the parking lot status.



- Click on [ + ] to expand the parking lot details.
- Click on [ - ] to hide the parking details.

## System Status

The UCM6200 system status can be accessed via Web GUI->**Status->System Status**, which displays the following system information.

- **General**
- **Network**
- **Storage Usage**
- **Resource Usage**

### General

Under Web GUI->**Status->System Status->General**, users could check the hardware and software information for the UCM6200. Please see details in the following table.

Table 111: System Status->General

| Status ->System Status -> General |   |
|-----------------------------------|---|
| <b>Model</b>                      | Product model.  |
| <b>Part Number</b>                | Product part number.  |
| <b>System Time</b>                | Current system time. The current system time is also available on the upper right of each web page. |
| <b>Up Time</b>                    | System up time since the last reboot.   |
| <b>Boot</b>                       | Boot version.   |
| <b>Core</b>                       | Core version.   |
| <b>Base</b>                       | Base version.   |
| <b>Program</b>                    | Program version. This is the main software release version.   |
| <b>Recovery</b>                   | Recovery version.   |

### Network

Under Web GUI->**Status->System Status->Network**, users could check the network information for the UCM6200. Please see details in the following table.

Table 112: System Status->Network

| Status -> System Status -> Network |  |
|------------------------------------|--|
|------------------------------------|--|



|                    |   |
|--------------------|---|
| <b>MAC Address</b> | Global unique ID of device, in HEX format. The MAC address can be found on the label coming with original box and on the label located on the bottom of the device. |
| <b>IP Address</b>  | IP address.   |
| <b>Gateway</b>     | Default gateway address.  |
| <b>Subnet Mask</b> | Subnet mask address.  |
| <b>DNS Server</b>  | DNS Server address.   |

## Storage Usage

Users could access the storage usage information from web UI->**Status**->**System Status**->**Storage Usage**. It shows the available and used space for Space Usage and Inode Usage.

### Space Usage includes:

- Configuration partition  
This partition contains PBX system configuration files and service configuration files.
- Data partition  
Voicemail, recording files, IVR file, Music on Hold files and etc.
- USB disk  
USB disk will display if connected.
- SD Card  
SD Card will display if connected.

### Inode Usage includes:

- Configuration partition
- Data partition

**Note:** Inode is the pointer used for file reference in the system. The system usually has limited resources of pointers



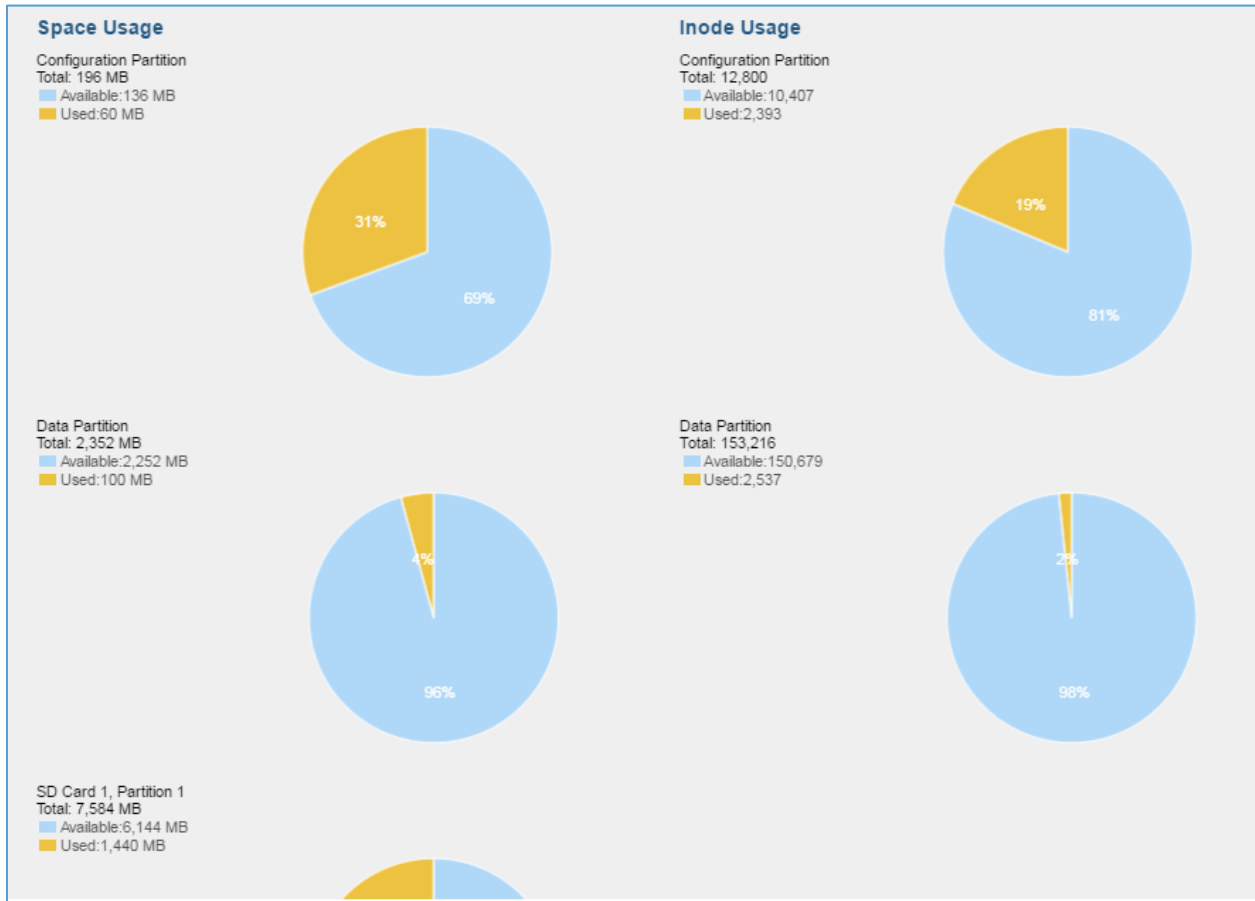


Figure 209: System Status->Storage Usage

### Resource Usage

When configuring and managing the UCM6200, users could access resource usage information to estimate the current usage and allocate the resources accordingly. Under web UI->**Status->System Status->Resource Usage**, the current CPU usage and Memory usage are shown in the pie chart.

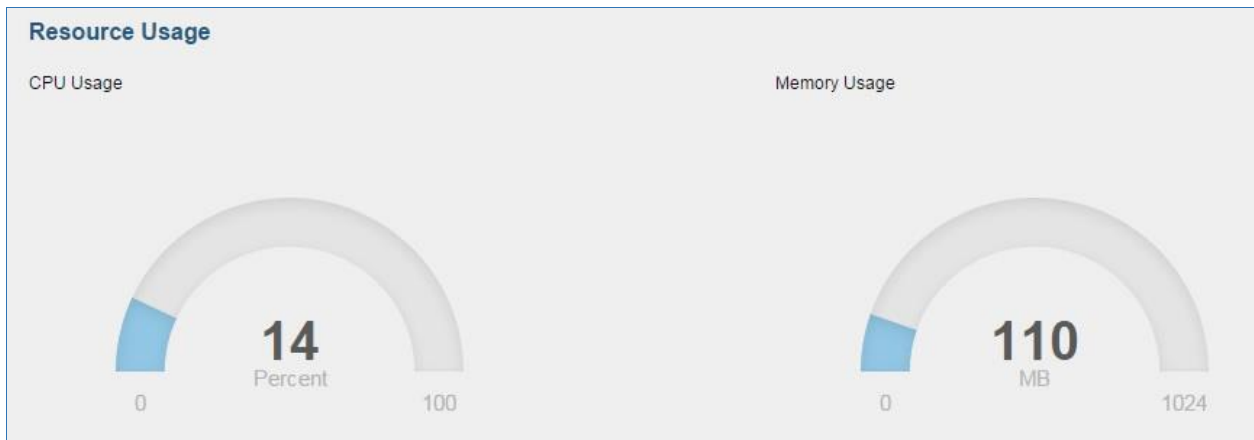


Figure 210: System Status->Resource Usage



## System Events

The UCM6200 can monitor important system events, log the alerts and send Email notifications to the system administrator.

### Alert Events List

The system alert events list can be found under Web GUI->**Status->System Events->Alert Events List**. The following event are currently supported on the UCM6200 which will have alert and/or Email generated if occurred:

***Disk Usage***

***External Disk Usage***

***Modify Admin Password***

***Memory Usage***

***System Reboot***

***System Update***

***System Crash***

***Register SIP Failed***

***Register SIP Trunk Failed***

***Restore Config***

***User Login Success***

***User Login Failed***

***SIP Internal Call Failure***

***SIP Outgoing Call through Trunk Failure***


***Fail2ban Blocking***

***SIP Lost Registration***

***SIP Peer Trunk Status***

Click on  to configure the parameters for each event. See examples below.

1. Disk Usage.

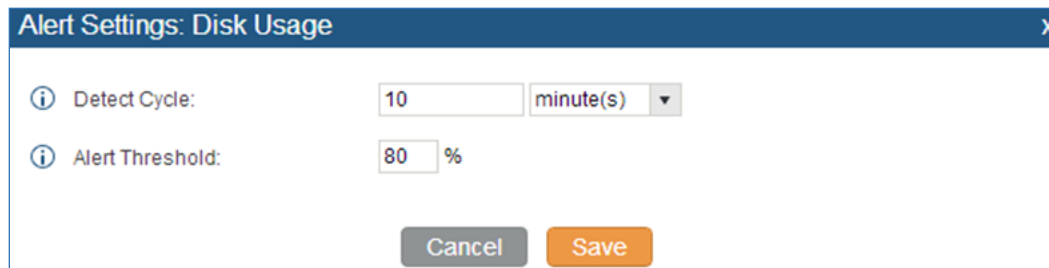

The screenshot shows a dialog box titled "Alert Settings: Disk Usage" with a close button (X) in the top right corner. It contains two configuration fields:

- Detect Cycle:** A text input field containing "10" and a dropdown menu set to "minute(s)".
- Alert Threshold:** A text input field containing "80" followed by a percentage sign "%".


At the bottom of the dialog box, there are two buttons: "Cancel" (grey) and "Save" (orange).



Figure 211: System Events->Alert Events Lists: Disk Usage

- **Detect Cycle:** The UCM6200 will perform the internal disk usage detection based on this cycle. Users can enter the number and then select second(s)/minute(s)/hour(s)/day(s) to configure the cycle.
- **Alert Threshold:** If the detected value exceeds the threshold (in percentage), the UCM6200 system will send the alert.

## 2. External Disk Usage

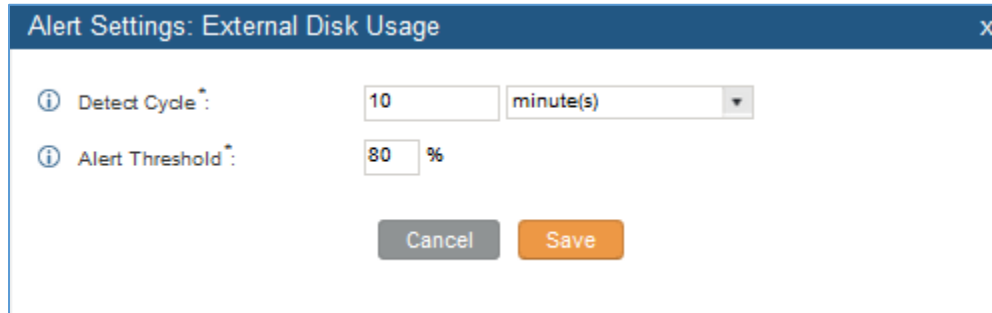


The dialog box titled "Alert Settings: External Disk Usage" contains two configuration fields. The first field, "Detect Cycle", has a text input with the value "10" and a dropdown menu set to "minute(s)". The second field, "Alert Threshold", has a text input with the value "80" followed by a percentage sign "%". At the bottom of the dialog are two buttons: "Cancel" and "Save".

Figure 212: System Events->Alert Events Lists: External Disk Usage

- **Detect Cycle:** The UCM6200 will perform the External disk usage detection based on this cycle. Users can enter the number and then select second(s)/minute(s)/hour(s)/day(s) to configure the cycle.
- **Alert Threshold:** If the detected value exceeds the threshold (in percentage), the UCM6200 system will send the alert.

## 3. Memory Usage

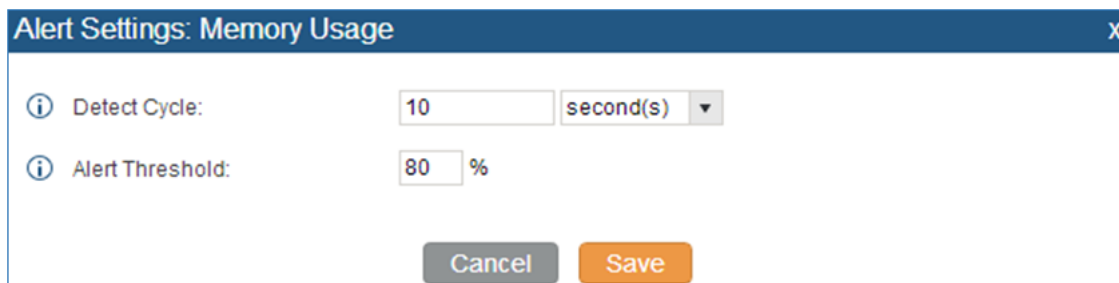

The dialog box titled "Alert Settings: Memory Usage" contains two configuration fields. The first field, "Detect Cycle", has a text input with the value "10" and a dropdown menu set to "second(s)". The second field, "Alert Threshold", has a text input with the value "80" followed by a percentage sign "%". At the bottom of the dialog are two buttons: "Cancel" and "Save".

Figure 213: System Events->Alert Events Lists: Memory Usage

- **Detect Cycle:** The UCM6200 will perform the memory usage detection based on this cycle. Users can enter the number and then select second(s)/minute(s)/hour(s)/day(s) to configure the cycle.
- **Alert Threshold:** If the detected value exceeds the threshold (in percentage), the UCM6200 system will send the alert.

## 4. System Reboot





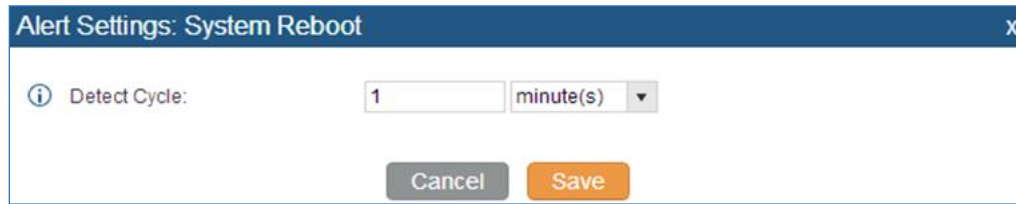


Figure 214: System Events->Alert Events Lists: System Reboot

- **Detect Cycle:** The UCM6200 will check the system reboot based on this cycle. Users can enter the number and then select second(s)/minute(s)/hour(s)/day(s) to configure the cycle.

## 5. System Crash

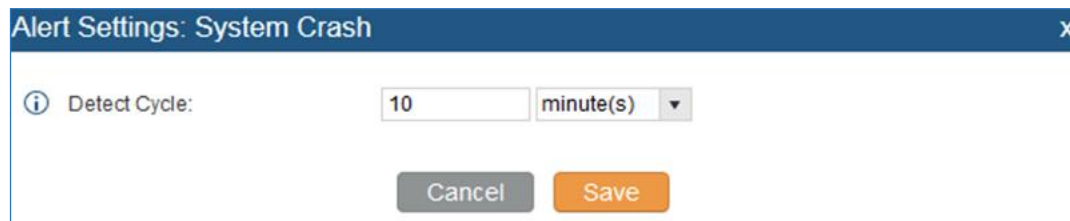




Figure 215: System Events->Alert Events Lists: System Crash


- **Detect Cycle:** The UCM will detect the event at each cycle based on the specified time. Users can enter the number and then select second(s)/minute(s)/hour(s)/day(s) to configure the cycle.

Click on the switch   to turn on/off the alert and Email notification for the event. Users could also select the checkbox for each event and then click on button "Alert On", "Alert Off", "Email Notification On", "Email Notification Off" to control the alert and Email notification configuration.

## Alert Log

Under Web GUI->**Status->System Events->Alert Log**, system messages from triggered system events are listed as alert logs. The following screenshot shows system crash alert logs.



Status >> System Events >> Alert Log 

**Alert Log**

Event Name:

Type:

Start Time:

End Time:

View: 10

| Time                | Event Name   | Type           | Content  |
|---------------------|--------------|----------------|--|
| 2014-12-28 16:53:58 | System Crash | Generate Alert | System crashed. System has restored automatically. The core dump file is: <a href="#">Here</a> |
| 2014-12-26 05:33:54 | System Crash | Generate Alert | System crashed. System has restored automatically. The core dump file is: <a href="#">Here</a> |
| 2014-12-23 20:03:50 | System Crash | Generate Alert | System crashed. System has restored automatically. The core dump file is: <a href="#">Here</a> |
| 2014-12-21 14:43:50 | System Crash | Generate Alert | System crashed. System has restored automatically. The core dump file is: <a href="#">Here</a> |
| 2014-12-19 08:01:23 | System Crash | Generate Alert | System crashed. System has restored automatically. The core dump file is: <a href="#">Here</a> |

**Figure 216: System Events->Alert Log**

User could also filter alert logs by selecting a certain event category, type of alert log, and/or specifying a certain time period. The matching results will be displayed after clicking on . Alert logs are classified into two types by the system:

1. **Generate Alert:** Generated when alert events happen, for example, alert logs for disk usage exceeding the alert threshold.
2. **Restore to Normal:** Generated when alert events being cleared, for example, logs for disk usage dropping back below the alert threshold.

User could filter out alert logs of “Generate Alert” or “Restore to Normal” by specifying the type according to need. The following figure shows an example of filtering out alert logs of type of “Restore to Normal”.

**Alert Log**

Event Name:

Type:

Start Time:

End Time:

View: 10

| Time                | Event Name            | Type              | Content   |
|---------------------|-----------------------|-------------------|---|
| 2014-10-20 10:03:25 | SIP Peer Trunk Status | Restore to normal | SIP peer trunk service return to normal! Trunk name is: HZPBX.        |
| 2014-10-20 09:44:27 | SIP Peer Trunk Status | Restore to normal | SIP peer trunk service return to normal! Trunk name is: MoroccoPBX.   |
| 2014-10-20 09:21:10 | SIP Peer Trunk Status | Restore to normal | SIP peer trunk service return to normal! Trunk name is: MoroccoPBX.   |
| 2014-10-20 09:17:53 | SIP Peer Trunk Status | Restore to normal | SIP peer trunk service return to normal! Trunk name is: VenezuelaUCM. |
| 2014-10-20 09:08:55 | SIP Peer Trunk Status | Restore to normal | SIP peer trunk service return to normal! Trunk name is: MoroccoPBX.   |
| 2014-10-20 08:54:53 | SIP Peer Trunk Status | Restore to normal | SIP peer trunk service return to normal! Trunk name is: HZPBX.        |
| 2014-10-20 08:52:37 | SIP Peer Trunk Status | Restore to normal | SIP peer trunk service return to normal! Trunk name is: MoroccoPBX.   |
| 2014-10-20 08:23:32 | SIP Peer Trunk Status | Restore to normal | SIP peer trunk service return to normal! Trunk name is: VenezuelaUCM. |
| 2014-10-20 08:21:20 | SIP Peer Trunk Status | Restore to normal | SIP peer trunk service return to normal! Trunk name is: VenezuelaUCM. |

**Figure 217: Filter for Alert Log**



## Alert Contact

Users could add administrator's Email address under Web GUI->**Status->System Events->Alert Contact** to send the alert notification to. Up to 10 Email addresses can be added.

## CDR

CDR (Call Detail Record) is a data record generated by the PBX that contains attributes specific to a single instance of phone call handled by the PBX. It has several data fields to provide detailed description for the call, such as phone number of the calling party, phone number of the receiving party, start time, call duration, and etc.

On the UCM6200, the CDR can be accessed under web UI->**Status->CDR->CDR**. Users could filter the call report by specifying the date range and criteria, depending on how the users would like to include the logs to the report. Click on "Search" button to display the generated report.

### Call Detail Report

Call Type: Inbound Calls  
Outbound Calls  
Internal Calls

Source Trunk Name: test

Action Type: DIAL  
ANNOUNCEMENTS  
CALLBACK

Start Time: 14

Caller Number:

Callee Number:

Status: Answered  
No Answer  
Busy

Destination Trunk Name: test

Account Code: test/PIN1  
test/PIN2  
test/PIN1

End Time: 14

Caller Name:

Search
Download Search Result (s)
Download All Records
Automatic Download Settings
Delete All

Note: If the subrecord of one CDR record matches the search conditions, then the CDR record will be displayed. Click on the title of the column to sort by column. Click on the Details button to display full record.

View: 10

| No. | Start Time          | Action Type | Call from       | Call to            | Call Time | Talk Time | Account Code | Status | Recording File Option: | Options |
|-----|---------------------|-------------|-----------------|--------------------|-----------|-----------|--------------|--------|------------------------|---------|
| 1   | 2016-11-15 17:00:04 | DIAL        | "test" 2001     | 1000 [Trunk: test] | 0:00:04   | 0:00:04   | test/PIN1    |        | No Recording Files     |         |
| 2   | 2016-11-15 16:58:12 | DIAL        | "test" 2001     | 1000               | 0:00:13   | 0:00:13   |              |        | No Recording Files     |         |
| 3   | 2016-11-15 16:57:28 | DIAL        | "John Doe" 2001 | 1000 [Trunk: test] | 0:00:04   | 0:00:04   | test/PIN2    |        | No Recording Files     |         |
| 4   | 2016-11-15 16:57:06 | DIAL        | "Mhammed" 2000  | 1001 [Trunk: test] | 0:00:05   | 0:00:05   | test/PIN2    |        | No Recording Files     |         |

Figure 218: CDR Filter

Table 113: CDR Filter Criteria

|                  |   |
|------------------|---|
| <b>Call Type</b> | Groups the following: <ul style="list-style-type: none"> <li><b>Inbound calls:</b> Inbound calls are calls originated from a non-internal source (like a VoIP trunk) and sent to an internal extension.</li> <li><b>Outbound calls:</b> Outbound calls are calls sent to a non-internal source (like</li> </ul> |
|------------------|---|



|                               |   |
|-------------------------------|---|
|                               | <p>a VoIP trunk) from an internal extension.</p> <ul style="list-style-type: none"> <li>• <b>Internal calls:</b> Internal calls are calls from one internal extension to another extension, which are not sent over a trunk.</li> <li>• <b>External calls:</b> External calls are calls sent from one trunk to another trunk, which are not sent to any internal extension.</li> </ul>  |
| <b>Status</b>                 | <p>Filter with the call status, the available statuses are the following:</p> <ul style="list-style-type: none"> <li>• Answered</li> <li>• No Answer</li> <li>• Busy</li> <li>• Failed</li> </ul>   |
| <b>Source Trunk Name</b>      | <p>Select source trunk(s) and the CDR of calls going through inbound the trunk(s) will be filtered out.</p>   |
| <b>Destination Trunk Name</b> | <p>Select destination trunk(s) and the CDR of calls going outbound through the trunk(s) will be filtered out.</p>   |
| <b>Action Type</b>            | <p>Filter calls using the Action Type, the following actions are available:</p> <ul style="list-style-type: none"> <li>• Dial</li> <li>• Announcements</li> <li>• Callback</li> <li>• Call Forward</li> <li>• Conference</li> <li>• Disa</li> <li>• Fax</li> <li>• Follow Me</li> <li>• IVR</li> <li>• Page</li> <li>• Parked Call</li> <li>• Queue</li> <li>• Ring Group</li> <li>• Transfer</li> <li>• VFax</li> <li>• VM</li> <li>• VMG</li> <li>• Wakeup</li> </ul> |
| <b>Account Code</b>           | <p>Select the account Code to filter with. If pin group CDR is enabled, the call with pin group information will be displayed as part of the CDR under Account Code Field.</p>  |
| <b>Start Time</b>             | <p>Specify the start time to filter the CDR report. Click on the calendar icon on the right and the calendar will show for users to select the exact date and time.</p>   |
| <b>End Time</b>               | <p>Specify the end time to filter the CDR report. Click on the calendar icon on the right and the calendar will show for users to select the exact date and time.</p>   |
| <b>Caller Number</b>          | <p>Enter the caller number to filter the CDR report. CDR with the matching caller number</p>  |



|                      |   |
|----------------------|---|
|                      | <p>will be filtered out.</p> <p>User could specify a particular caller number or enter a pattern. '.' matches zero or more characters, only appears in the end. 'X' matches any digit from 0 to 9, case-insensitive, repeatable, only appears in the end.</p> <p>For example:</p> <p>3XXX: It will filter out CDR that having caller number with leading digit 3 and of 4 digits' length.</p> <p>3.: It will filter out CDR that having caller number with leading digit 3 and of any length.</p> |
| <b>Caller Name</b>   | Enter the caller name to filter the CDR report. CDR with the matching caller name will be filtered out.   |
| <b>Callee Number</b> | Enter the callee number to filter the CDR report. CDR with the matching callee number will be filtered out.   |

The call report will display as the following figure shows.

| No. | Start Time          | Action Type | Call from             | Call to                | Call Time | Talk Time | Account Coc      | Status | Recording File Opti | Options |
|-----|---------------------|-------------|-----------------------|------------------------|-----------|-----------|------------------|--------|---------------------|---------|
| 1   | 2016-09-03 00:10:02 | WAKEUP      | "Wake Up Call" WakeUp | 2000                   | 0:00:15   | 0:00:01   |                  |        | No Recording Files  |         |
| 2   | 2016-09-03 00:06:34 | DIAL        | 2000                  | 95002 [Trunk: UCM6202] | 0:00:09   | 0:00:09   | Grandstream/Test |        | No Recording Files  |         |
| 3   | 2016-09-03 00:06:16 | DIAL        | "John Doe" 2000       | 2002                   | 0:00:02   | 0:00:00   |                  |        | No Recording Files  |         |

**Figure 219: Call Report**

The CDR report has the following data fields:

- Start Time**  
 Format: 2016-09-03 00:06:16
- Call Type**  
 Example:  
 IVR  
 DIAL  
 WAKEUP
- Call From**  
 Example format:  
 "John Doe" 2000
- Call To**  
 Example format:






2002

- **Call Time**  
Format: 0:00:02
- **Talk Time**  
Format: 0:00:00
- **Account Code**  
Example format:  
Grandstream/Test
- **Status**  
Answered, Busy, No answer or Failed.

Users could perform the following operations on the call report.

- **Sort by “Start Time”**
  - Click on the header of the column to sort the report by "Start Time". Clicking on "Start Time" again will reverse the order.
- **Download Searched Results**  
Click on “Download Search Result(s)” to export the records filtered out to a .csv file.
- **Download All Records**  
Click on “Download All Records” to export all the records to a .csv file.
- **Delete All**  
On the bottom of the page, click on "Delete All" button to remove all the call report information.
- **Play/Download/Delete Recording File (per entry)**  
If the entry has audio recording file for the call, the three icons on the most right column will be activated for users to select. In the following picture, the second entry has audio recording file for the call.

Click on  to play the recording file; click on  to download the recording file in .wav format; click on

 to delete the recording file (the call record entry will not be deleted).






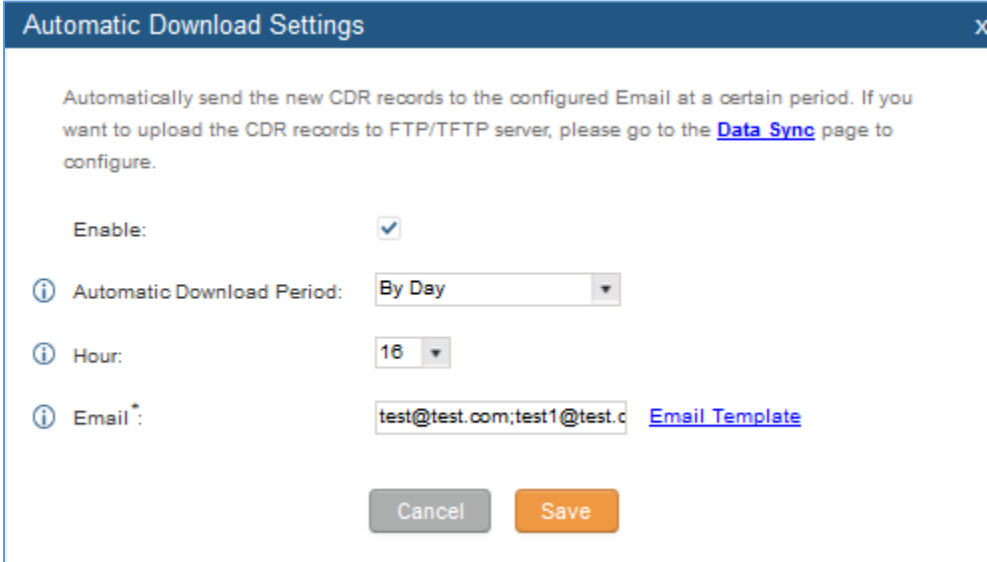
|   |                     |      |                 |      |         |         |   |   |   |   |   |
|---|---------------------|------|-----------------|------|---------|---------|---|---|---|---|---|
| 1 | 2016-09-03 00:13:20 | DIAL | "John Doe" 2001 | 2000 | 0:00:19 | 0:00:16 |  |  |  |  |  |
|---|---------------------|------|-----------------|------|---------|---------|---|---|---|---|---|

Figure 220: Call Report Entry with Audio Recording File

- **Automatic Download CDR Records**



User could configure the UCM6200 to automatically download the CDR records and send the records to multiple Email recipients in a specific hour. Click on “Automatic Download Settings”, and configure the parameters in the dialog below.



**Figure 221: Automatic Download Settings**

To receive CDR record automatically from Email, check “Enable” and select a time period “By Day” “By Week” or “By Month”, select Hour of the day as well for the automatic download period. Make sure you have entered an Email or multiple email addresses where to receive the CDR records.

### CDR Improvement

Starting from UCM6200 firmware 1.0.10.x, transferred call will no longer be displayed as a separate call entry in CDR. It will display within call record in the same entry. CDR new features can be found under **web UI-> Status->CDR->CDR**. The user can click on the option icon for a specific call log entry to view details about this entry, such as premier caller and transferred call information.



| No. | Start Time          | Call Type | Call From | Call To | Call Time | Talk Time | Account Code | Status | Recording File     | Options |
|-----|---------------------|-----------|-----------|---------|-----------|-----------|--------------|--------|--------------------|---------|
| 1   | 2016-06-30 07:09:04 | DIAL      | 2008      | 2003    | 0:00:12   | 0:00:10   |              |        | No Recording Files |         |
| 2   | 2016-06-30 07:08:56 | VM        | 2007      | 2002    | 0:00:03   | 0:00:02   |              |        | No Recording Files |         |

Figure 222: CDR Report

| Start Time          | Premier Caller | Call Type | Call From | Call To | Call Time | Talk Time | Account Code | Status | Recording File     | Options |
|---------------------|----------------|-----------|-----------|---------|-----------|-----------|--------------|--------|--------------------|---------|
| 2016-06-30 07:09:04 | 2008           | DIAL      | 2008      | 2003    | 0:00:07   | 0:00:05   |              |        | No Recording Files |         |
| 2016-06-30 07:09:12 | 2003           | TRANSFER  | 2008      | 2000    | 0:00:05   | 0:00:05   |              |        | No Recording Files |         |

Figure 223: Detailed CDR Information

## Downloaded CDR File

The downloaded CDR (.csv file) has different format from the web UI CDR. Here are some descriptions.

- **Caller number, Callee number**

"Caller number": the caller ID.

"Callee number": the callee ID.

If the "Source Channel" contains "DAHDI", this means the call is from FXO/PSTN line.

| caller number | callee number | context         | calerid                 | source channel                      | dest channel           | lastapp |
|---------------|---------------|-----------------|-------------------------|-------------------------------------|------------------------|---------|
|               | 2009          | from-internal   | "Wake Up Call" <WakeUp> | Local/2009@from-internal-00000001;2 | PJSIP/2009-00000013    | Dial    |
| 2007          | 31100         | from-internal   | "" <2007>               | PJSIP/2007-00000014                 | DAHDI/1-1              | Dial    |
| 2009          | 1100          | from-internal   | "John Doe" <2009>       | PJSIP/2009-00000015                 | PJSIP/trunk_1-00000016 | Dial    |
| 1100          | 2014          | from-did-direct | "1100" <1100>           | DAHDI/1-1                           | PJSIP/2014-00000017    | Dial    |

Figure 224: Downloaded CDR File Sample

- **Context**

There are different context values that might show up in the downloaded CDR file. The actual value can vary case by case. Here are some sample values and their descriptions.

**from-internal**: internal extension makes outbound calls.

**ext-did-XXXXX**: inbound calls. It starts with "ext-did", and "XXXXX" content varies case by case, which also relate to the order when the trunk is created.

**ext-local**: internal calls between local extensions.

- **Source Channel, Dest Channel**

Sample 1:

| caller number | callee number | context       | calerid   | source channel      | dest channel | disposition |
|---------------|---------------|---------------|-----------|---------------------|--------------|-------------|
| 2007          | 31100         | from-internal | "" <2007> | PJSIP/2007-00000014 | DAHDI/1-1    | ANSWERED    |





**Figure 225: Downloaded CDR File Sample - Source Channel and Dest Channel 1**

DAHDI means it is an analog call, FXO or FXS.

For UCM6202, DAHDI/(1-2) are FXO ports, and DAHDI(3-4) are FXS ports.

For UCM6204, DAHDI/(1-4) are FXO ports, and DAHDI(5-6) are FXS ports.

For UCM6208, DAHDI/(1-8) are FXO ports, and DAHDI(9-10) are FXS ports.

**Sample 2:**

| caller number | callee number | context       | calerid           | source channel      | dest channel           | lastapp |
|---------------|---------------|---------------|-------------------|---------------------|------------------------|---------|
| 2009          | 1100          | from-internal | "John Doe" <2009> | PJSIP/2009-00000015 | PJSIP/trunk_1-00000016 | Dial    |

**Figure 226: Downloaded CDR File Sample - Source Channel and Dest Channel 2**

"SIP" means it's a SIP call. There are three possible format:

(a) **PJSIP/NUM-XXXXXX**, where NUM is the local SIP extension number. The last XXXXX is a random string and can be ignored.

(c) **PJSIP/trunk\_X/NUM**, where trunk\_X is the internal trunk name, and NUM is the number to dial out through the trunk.

(c) **PJSIP/trunk\_X-XXXXXX**, where trunk\_X is the internal trunk name and it is an inbound call from this trunk. The last XXXXX is a random string and can be ignored.

There are some other possible values, but these values are almost the application name which are used by the dialplan.

**IAX2/NUM-XXXXXXX**: it means this is an IAX call.

**Local/@from-internal-XXXXX**: it is used internally to do some special feature procedure. We can simply ignore it.


**Hangup**: the call is hung up from the dialplan. This indicates there are some errors or it has run into abnormal cases.

**Playback**: play some prompts to you, such as 183 response or run into an IVR.

**ReadExten**: collect numbers from user. It may occur when you input PIN codes or run into DISA

**Statistics**

CDR Statistics is an additional feature on the UCM6200 which provides users a visual overview of the call report across the time frame. Users can filter with different criteria to generate the statistics chart.

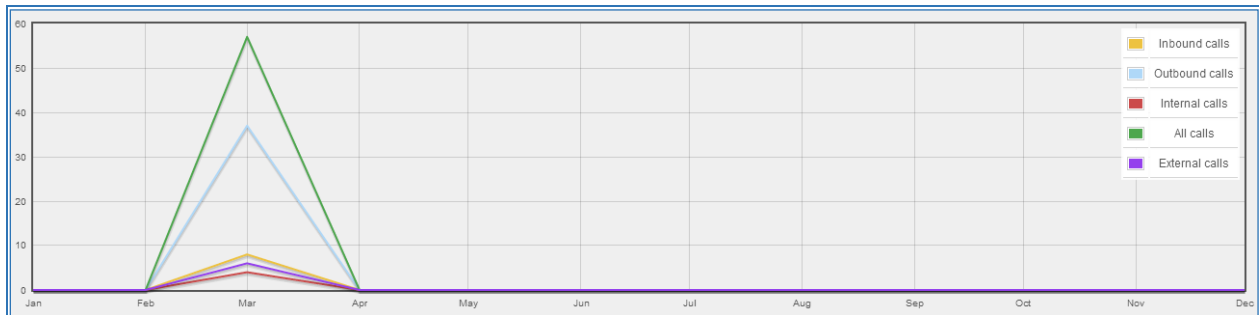

**Figure 227: CDR Statistics**

**Table 114: CDR Statistics Filter Criteria**

|                   |  |
|-------------------|--|
| <b>Trunk Type</b> | Select one of the following trunk type. <ul style="list-style-type: none"> <li>• All</li> <li>• SIP Calls</li> <li>• PSTN Calls</li> </ul>   |
| <b>Call Type</b>  | Select one or more in the following checkboxes. <ul style="list-style-type: none"> <li>• Inbound calls</li> <li>• Outbound calls</li> <li>• Internal calls</li> <li>• External calls</li> <li>• All calls</li> </ul>   |
| <b>Time Range</b> | <ul style="list-style-type: none"> <li>• By month (of the selected year).</li> <li>• By week (of the selected year).</li> <li>• By day (of the specified month for the year).</li> <li>• By hour (of the specified date).</li> <li>• By range. For example, 2016-01 To 2016-03.</li> </ul> |

## Recording Files

This page lists all the recording files recorded by "Auto Record" per extension/ring group/call queue/trunk, or via feature code "Audio Mix Record". If external storage device is plugged in, for example, SD card or USB drive, the files are stored on the external storage. Otherwise, internal storage will be used on the UCM6200.

Status >> CDR >> Recording Files ↻

**File List**

View: 10 ▾

Delete Selected Recording Files
Delete All Recording Files
Batch Download Recording Files
Download All Recording Files



|                          | Caller | Callee | Call Time                     | Size      | Options  |
|--------------------------|--------|--------|-------------------------------|-----------|--|
| <input type="checkbox"/> | 2002   | 2009   | 2016-06-30 09:22:25 UTC-04:00 | 167.86 KB | <span>▶</span> <span>🗑️</span> <span>⬇️</span> |

Total: 1 Show: 1/1 Go to:  Go

First Prev Next Last



**Figure 228: CDR->Recording Files**

- Click on “Delete Selected Recording Files” to delete the recording files.
- Click on “Delete All Recording Files” to delete all recording files.
- Click on  to download the recording file in .wav format.
- Click on  to delete the recording file.
- To sort the recording file, click on the title "Caller", "Callee" or "Call Time" for the corresponding column. Click on the title again can switch the sorting mode between ascending order or descending order.

### API Configuration

The UCM6200 supports third party billing interface API for external billing software to access CDR and call recordings on the PBX. The API uses HTTPS to request the CDR data and call recording data matching given parameters as configured on the third party application.

Before accessing the API, the administrators need enable API and configure the access/authentication information on the UCM6200 first. The API configuration parameters are listed in the table below.

**Table 115: API Configuration Files**

|                         |   |
|-------------------------|---|
| <b>Enable</b>           | Enable/Disable API. The default setting is disabled.  |
| <b>TLS Bind Address</b> | Configure the IP address for TLS server to bind to. "0.0.0.0" means binding to all interfaces. The port number is optional and the default port number is 8443. The IP address must match the common name (host name) in the certificate so that the TLS socket won't bind to multiple IP addresses. The default setting is 0.0.0.0:8443.                                   |
| <b>TLS Private Key</b>  | Upload TLS private key. The size of the key file must be under 2MB. This file will be renamed as 'private.pem' automatically.   |
| <b>TLS Cert</b>         | Upload TLS cert. The size of the certificate must be under 2MB. This is the certificate file (*.pem format only) for TLS connection. This file will be renamed as "certificate.pem" automatically. It contains private key for the client and signed certificate for the server.  |
| <b>Username</b>         | Configure the Username for API Authentication.  |
| <b>Password</b>         | Configure the Password for API Authentication.  |
| <b>Permitted</b>        | Specify a list of IP addresses permitted by API. This creates an AIP-specific access control list. Multiple entries are allowed.<br>For example, "192.168.5.20/255.255.255.255" denies access from all IP addresses except 192.168.5.20.<br>The default setting is blank, meaning all IPs will be denied. Users must set permitted IP address before connecting to the API. |



For more details on CDR API (Access to Call Detail Records) and REC API (Access to Call Recording Files), please refer the document in the link here:

[http://www.grandstream.com/sites/default/files/Resources/ucm61xx\\_cdr\\_rec\\_api\\_guide.pdf](http://www.grandstream.com/sites/default/files/Resources/ucm61xx_cdr_rec_api_guide.pdf)



## UPGRADING AND MAINTENANCE

### Upgrading

The UCM6200 can be upgraded to a new firmware version remotely or locally. This section describes how to upgrade your UCM6200 via network or local upload.


#### Upgrading Via Network

The UCM6200 can be upgraded via TFTP/HTTP/HTTPS by configuring the URL/IP Address for the TFTP/HTTP/HTTPS server and selecting a download method. Configure a valid URL for TFTP, HTTP or HTTPS; the server name can be FQDN or IP address.

#### Examples of valid URLs:

firmware.grandstream.com/BETA

The upgrading configuration can be accessed via **Web GUI->Maintenance->Upgrade**.

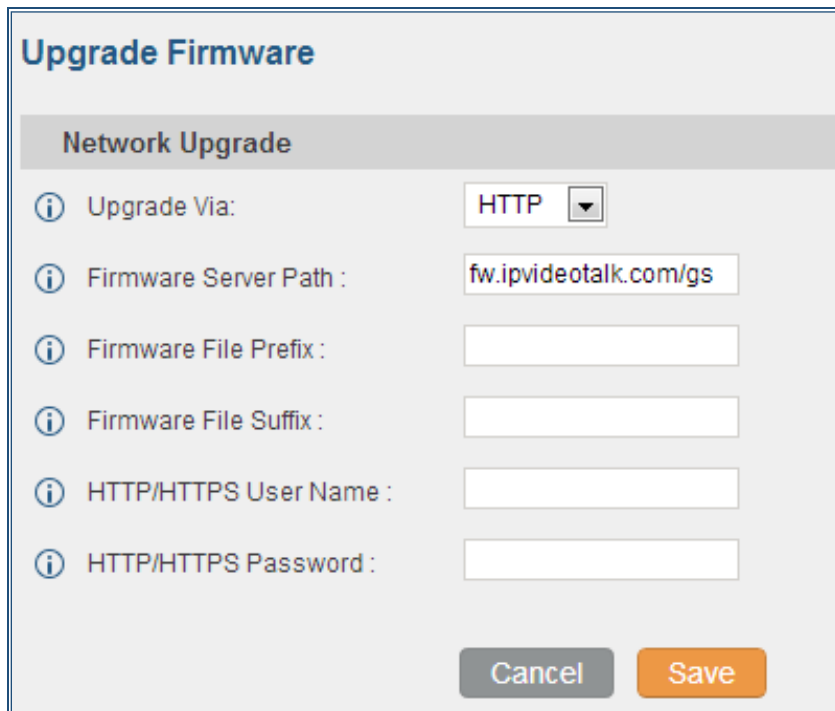

**Upgrade Firmware**

**Network Upgrade**

Upgrade Via: HTTP

Firmware Server Path : fw.ipvideotalk.com/gs

Firmware File Prefix :

Firmware File Suffix :

HTTP/HTTPS User Name :

HTTP/HTTPS Password :

Cancel Save

Figure 229: Network Upgrade



**Table 116: Network Upgrade Configuration**


|                             |   |
|-----------------------------|---|
| <b>Upgrade Via</b>          | Allow users to choose the firmware upgrade method: TFTP, HTTP or HTTPS.   |
| <b>Firmware Server Path</b> | Define the server path for the firmware server.   |
| <b>Firmware File Prefix</b> | If configured, only the firmware with the matching encrypted prefix will be downloaded and flashed into the UCM6200.  |
| <b>Firmware File Suffix</b> | If configured, only the firmware with the matching encrypted postfix will be downloaded and flashed into the UCM6200. |
| <b>HTTP/HTTPS User Name</b> | The user name for the HTTP/HTTPS server.  |
| <b>HTTP/HTTPS Password</b>  | The password for the HTTP/HTTPS server.   |


Please follow the steps below to upgrade the firmware remotely.

- Enter the firmware server path under **web UI->Maintenance->Upgrade**.
- Click on "Save". Then reboot the device to start the upgrading process.
- Please be patient during the upgrading process. Once done, a reboot message will be displayed in the LCD.
- Manually reboot the UCM6200 when it's appropriate to avoid immediate service interruption. After it boots up, log in the web GUI to check the firmware version.

### Upgrading Via Local Upload

If there is no HTTP/TFTP server, users could also upload the firmware to the UCM6200 directly via Web GUI. Please follow the steps below to upload firmware locally.

- Download the latest UCM6200 firmware file from the following link and save it in your PC.  
<http://www.grandstream.com/support/firmware>
- Log in the Web GUI as administrator in the PC.
- Go to Web GUI->**Maintenance->Upgrade**, upload the firmware file by clicking on  and select the firmware file from your PC. The default firmware file name is ucm6200fw.bin

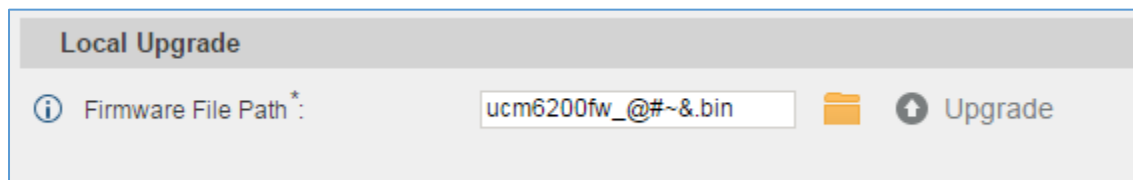
**Figure 230: Local Upgrade**

- Click on  to start upgrading.



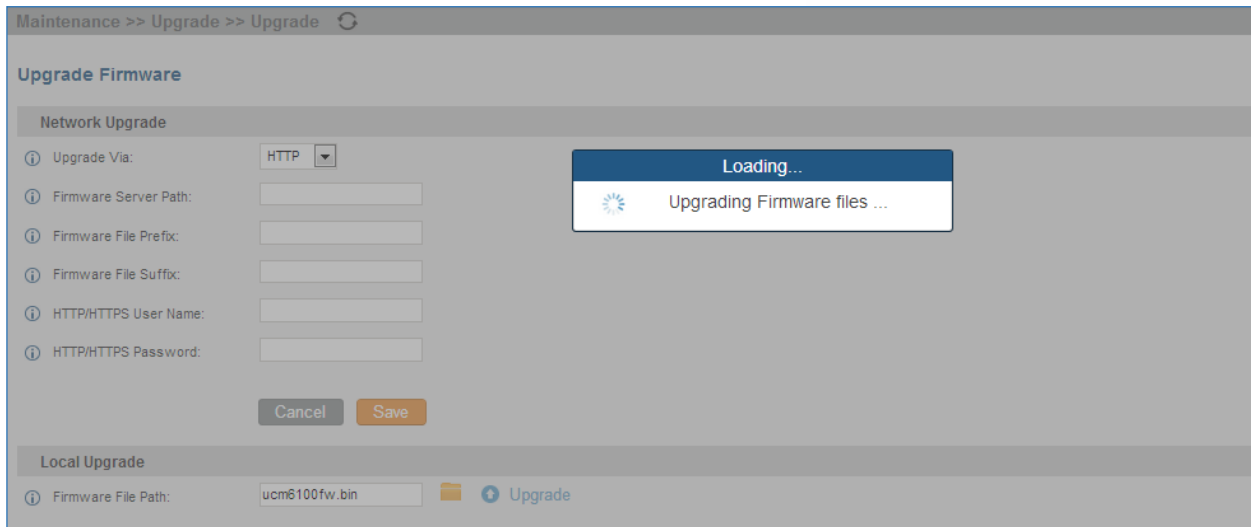


Figure 231: Upgrading Firmware Files

- Wait until the upgrading process is successful and a window will be popped up in the Web GUI.

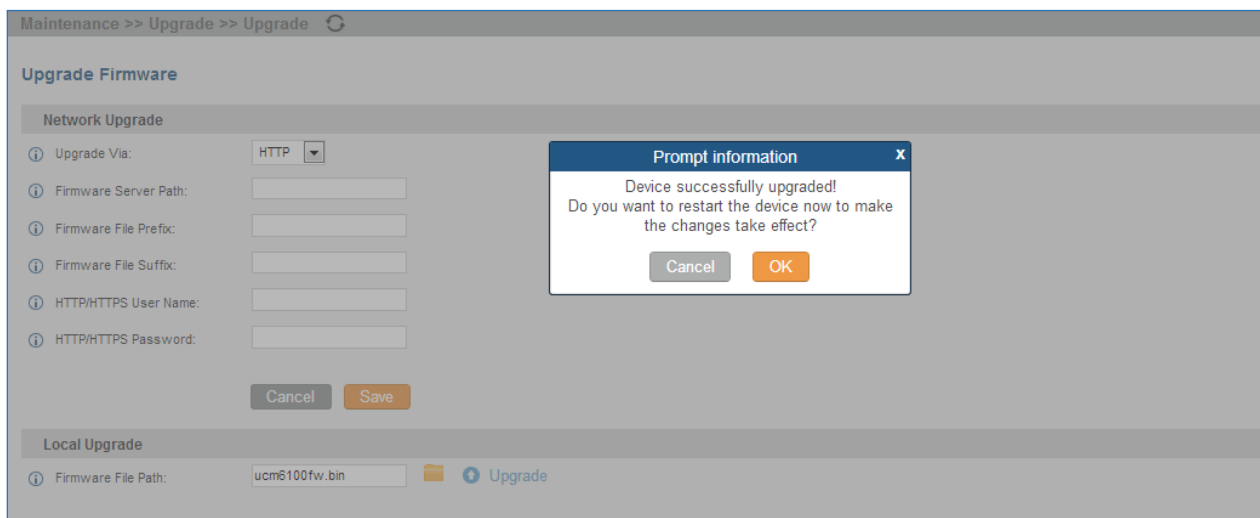


Figure 232: Reboot UCM6200

- Click on "OK" to reboot the UCM6200 and check the firmware version after it boots up.

**Notes:**

- Please do not interrupt or power cycle the UCM6200 during upgrading process.
- The firmware file name allows the use of the following special characters: “\_@#\*~&”.



## No Local Firmware Servers

Service providers should maintain their own firmware upgrade servers. For users who do not have TFTP/HTTP/HTTPS server, some free windows version TFTP servers are available for download from [http://www.solarwinds.com/products/freetools/free\\_tftp\\_server.aspx](http://www.solarwinds.com/products/freetools/free_tftp_server.aspx)  
<http://tftpd32.jounin.net>

Please check our website at <http://www.grandstream.com/support/firmware> for latest firmware.

Instructions for local firmware upgrade via TFTP:

1. Unzip the firmware files and put all of them in the root directory of the TFTP server;
2. Connect the PC running the TFTP server and the UCM6200 to the same LAN segment;
3. Launch the TFTP server and go to the File menu->Configure->Security to change the TFTP server's default setting from "Receive Only" to "Transmit Only" for the firmware upgrade;
4. Start the TFTP server and configure the TFTP server in the UCM6200 web configuration interface;
5. Configure the Firmware Server Path to the IP address of the PC;
6. Update the changes and reboot the UCM6200.


End users can also choose to download a free HTTP server from <http://httpd.apache.org/> or use Microsoft IIS web server.

## Backup

The UCM6200 configuration can be backed up locally or via network. The backup file will be used to restore the configuration on UCM6200 when necessary.


### Backup/Restore

Users could backup the UCM6200 configurations for restore purpose under Web GUI->**Maintenance**->**Backup**->**Local Backup**.

Click on  to create a new backup file. Then the following dialog will show.



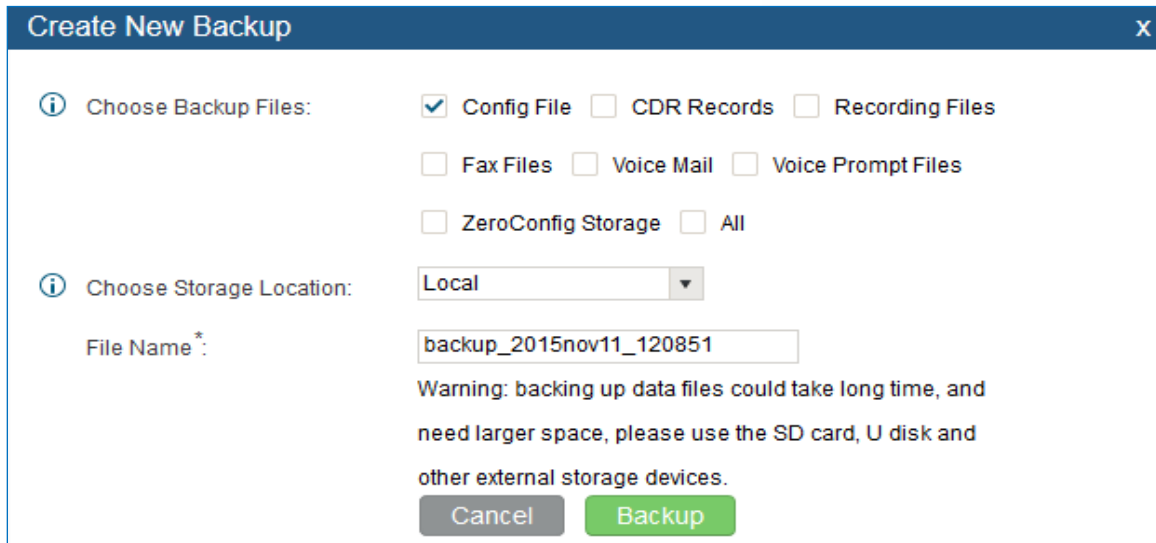







**Figure 233: Create New Backup**


1. Choose the type(s) of files to be included in the backup.
2. Choose where to store the backup file: USB Disk, SD Card or Local.
3. Name the backup file.
4. Click on "Backup" to start backup.

Once the backup is done, the list of the backups will be displayed with date and time in the web page. Users can download , restore , or delete  it from the UCM6200 internal storage or the external device.

Click on  to upload backup file from the local device to UCM6200. The uploaded backup file will also be displayed in the web page and can be used to restore the UCM6200.

It is also possible to load backup files from UCM6100 to UCM6200 and vice versa.

Please make sure the FXO port settings, total number of extensions and total number of conference rooms are compactable before restore to another UCM model. Otherwise it will prompt a warning and stop the restore process as shown below:

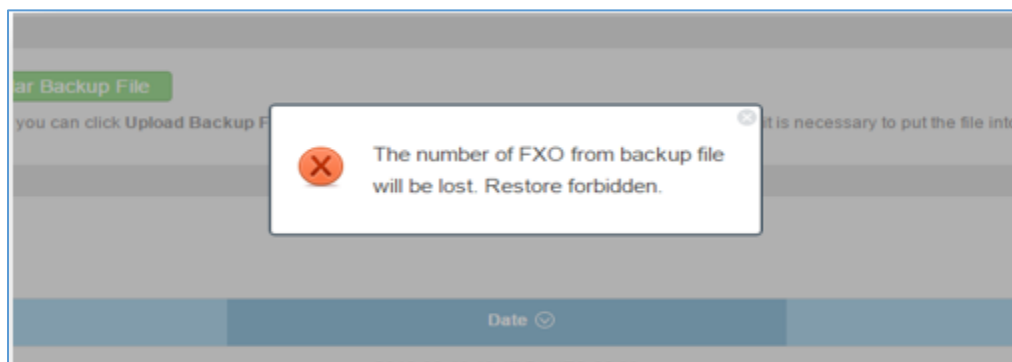


**Figure 234: Restore Warning**





**Figure 235: Backup / Restore**

**Regular Backup File** option allows UCM to perform automatically backup on the user specified time. Regular backup file can only be stored in USB / SD card / SFTP server. User is allowed to set backup time from 0-23 and how frequent the backup will be performed.

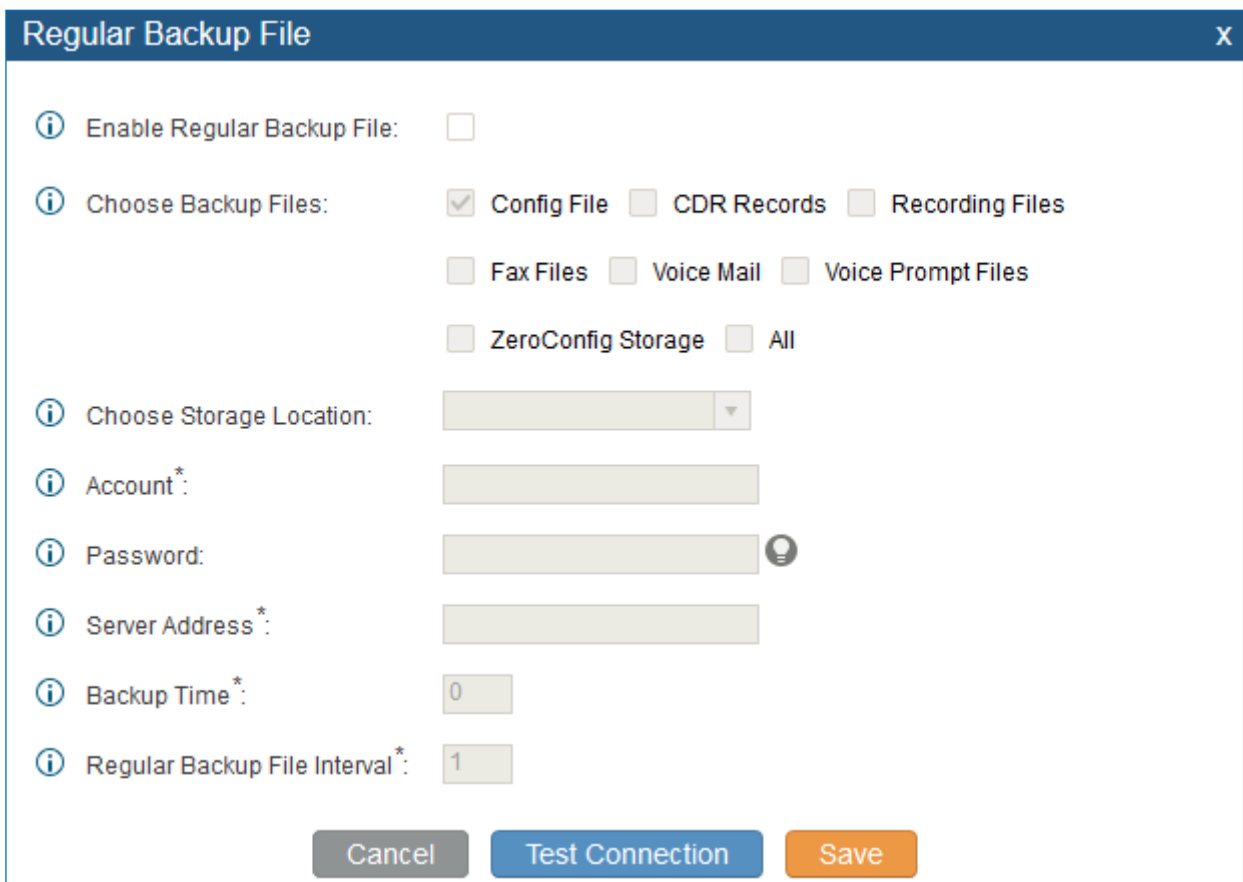

**Figure 236: Local Backup**



## Data Sync

Besides local backup, users could backup the voice records/voice mails/CDR/FAX in a daily basis to a remote server via SFTP protocol automatically under Web GUI->**Maintenance->Backup->Data Sync**.

The client account supports special characters such as @ or ".". This change allows user to use email address as SFTP accounts. It allows users as well to specify the destination directory on SFTP server for backup file. If the directory doesn't exist on the destination, UCM6200 will create the directory automatically

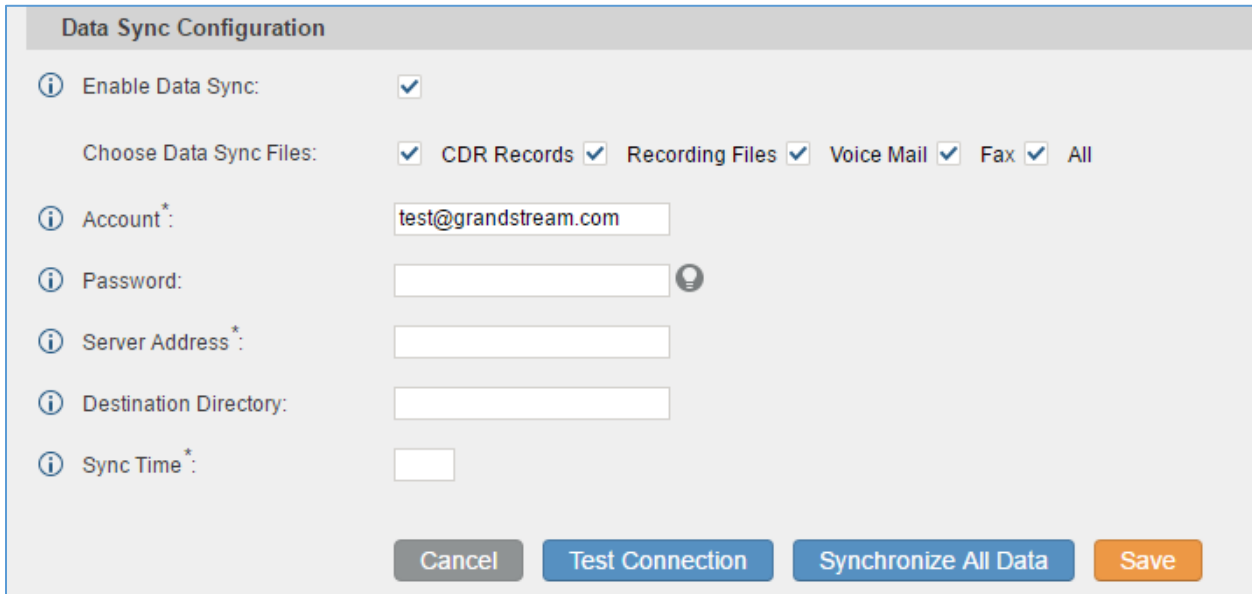


Figure 237: Data Sync

Table 117: Data Sync Configuration



|                              |  |
|------------------------------|--|
| <b>Enable Data Sync</b>      | Enable the auto data sync function. The default setting is "No".   |
| <b>Account</b>               | Enter the Account name on the SFTP backup server.  |
| <b>Password</b>              | Enter the Password associate with the Account on the SFTP backup server.   |
| <b>Server Address</b>        | Enter the SFTP server address.   |
| <b>Destination Directory</b> | Specify the directory in SFTP server to keep the backup file. Format: 'xxx/xxx/xxx', If this directory does not exist, UCM will create this directory automatically. |
| <b>Sync Time</b>             | Enter 0-23 to specify the backup hour of the day.  |


Before saving the configuration, users could click on "Test Connection". The UCM6200 will then try connecting the server to make sure the server is up and accessible for the UCM6200. Save the changes and all the backup logs will be listed on the web page. After data sync is configured, users could also manually synchronize all data by clicking on **Synchronize All Data** instead of waiting for the backup time interval to come.



## Restore Configuration from Backup File

To restore the configuration on the UCM6200 from a backup file, users could go to Web GUI->**Maintenance->Backup->Local Backup**.

- A list of previous configuration backups is displayed on the web page. Users could click on  of the desired backup file and it will be restored to the UCM6200.
- If users have other backup files on PC to restore on the UCM6200, click on "Upload Backup File" first and select it from local PC to upload on the UCM6200. Once the uploading is done, this backup file will be displayed in the list of previous configuration backups for restore purpose. Click on  to restore from the backup file.

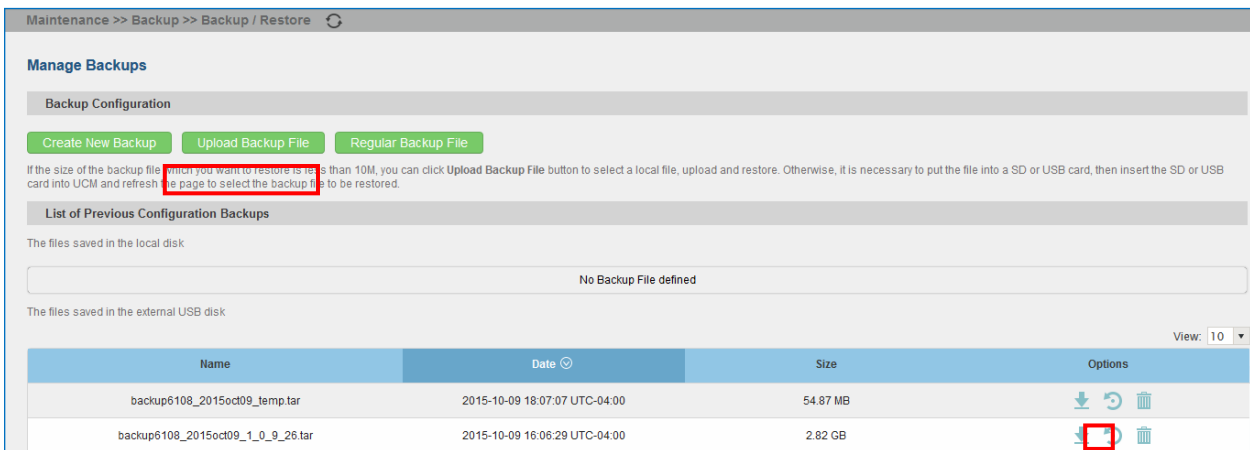

**Figure 238: Restore UCM6200 from Backup File**

### Note:

- The uploaded backup file must be a tar file with no special characters like \*,!,#,@,&,\$,%^,(,)/,\\,space in the file name.
- The uploaded back file size must be under 10MB.

## Cleaner

### Cleaner

Users could configure to clean the Call Detail Report/Voice Records/Voice Mails/FAX automatically under Web



GUI->Maintenance->Cleaner->Cleaner.

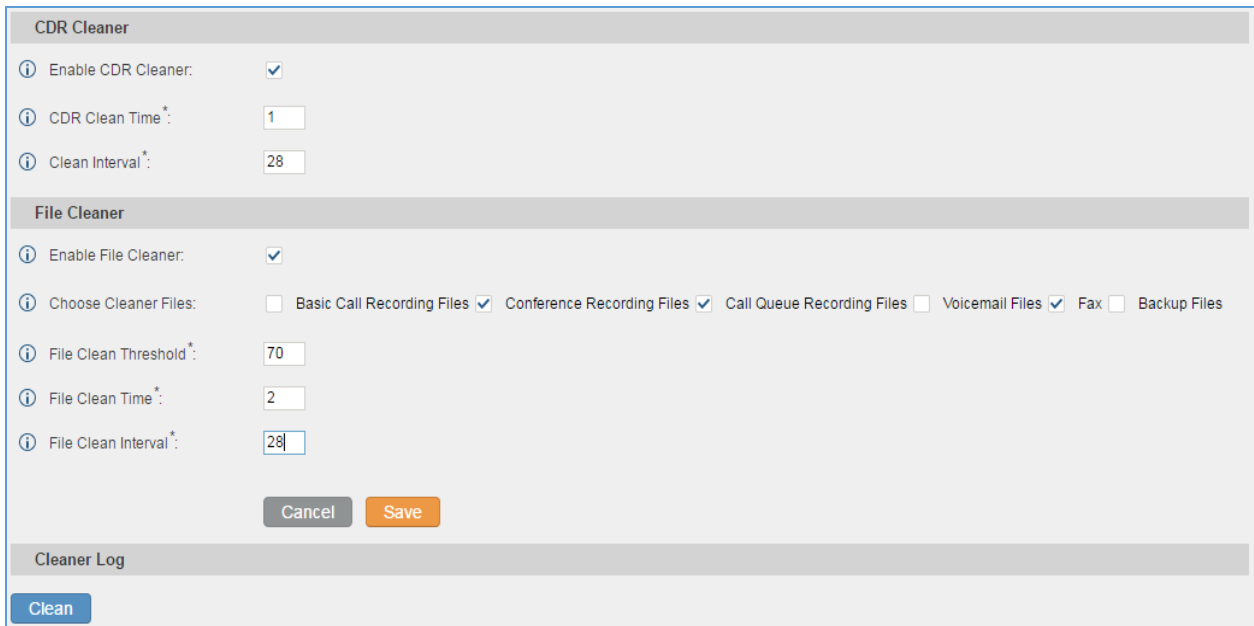


Figure 239: Cleaner

Table 118: Cleaner Configuration

|                             |  |
|-----------------------------|--|
| <b>Enable CDR Cleaner</b>   | Enable the CDR Cleaner function.   |
| <b>CDR Clean Time</b>       | Enter 0-23 to specify the hour of the day to clean up CDR.   |
| <b>Clean Interval</b>       | Enter 1-30 to specify the day of the month to clean up CDR.  |
| <b>Enable File Cleaner</b>  | Enter the Voice Records Cleaner function.  |
| <b>Choose Cleaner File</b>  | Select the files for system automatic clean. <ul style="list-style-type: none"> <li>• Basic Call Recording Files.</li> <li>• Conference Recording Files.</li> <li>• Call Queue Recording Files.</li> <li>• Voicemail Files.</li> <li>• Fax</li> <li>• Backup Files.</li> </ul> |
| <b>File Clean Threshold</b> | Specify the threshold of local storage usage from 0 to 99 (in percentage).   |
| <b>File Clean Time</b>      | Enter 0-23 to specify the hour of the day to clean up the files.   |
| <b>File Clean Interval</b>  | Enter 1-30 to specify the day of the month to clean up the files.  |

All the cleaner logs will be listed on the bottom of the page.




 **Note:**

Cleaner will delete data based on Recording Storage selection. If **USB Disk** is selected, Cleaner will only clean data in USB and local data will leave untouched. If **Enable auto change** is selected and USB disk is connected, Cleaner will only delete data in USB drive. Recordings Storage function can be found under web **UI-> Settings-> Recordings Storage-> Recordings Storage**.

### USB/SD Card Files Cleanup

Users could configure to clean the Call Detail Report/Voice Records/Voice Mails/FAX automatically under Web GUI->**Maintenance->Cleaner->USB / SD Card Files Cleanup**.

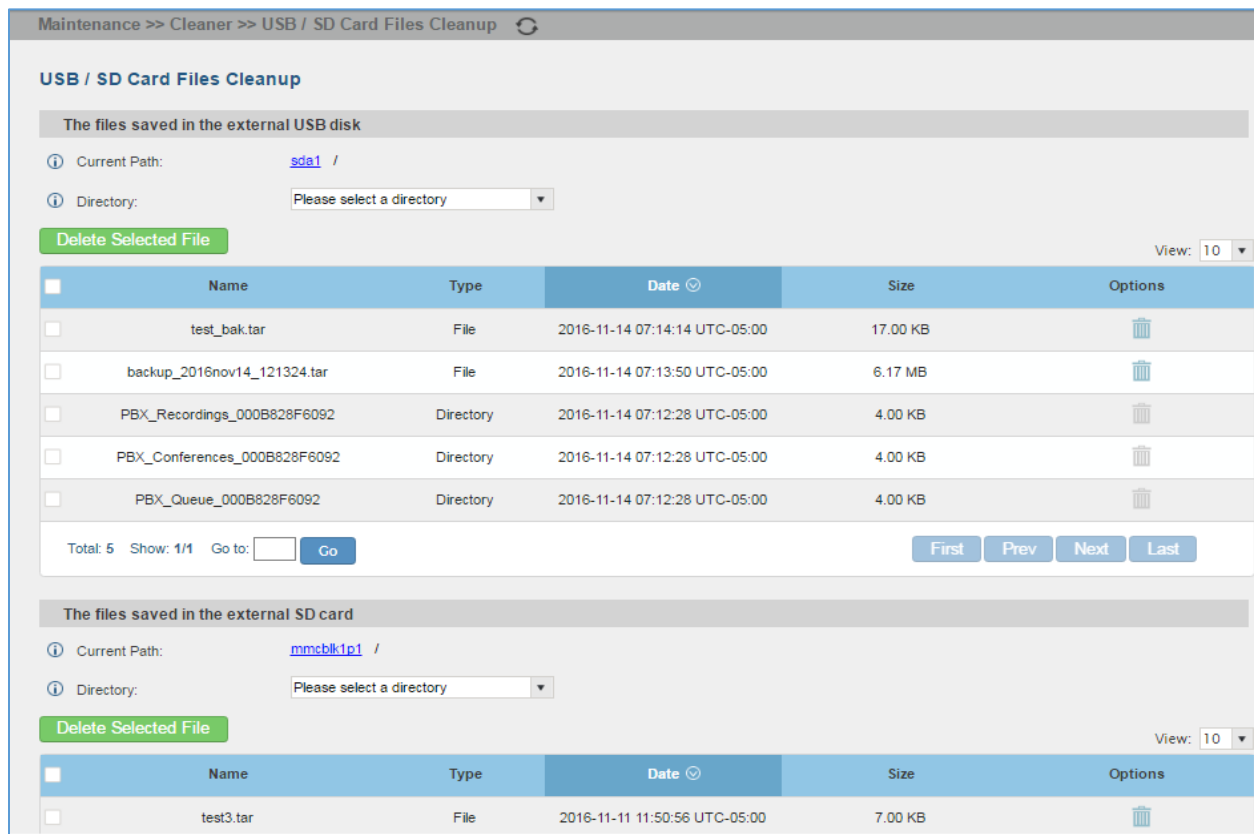

Maintenance >> Cleaner >> USB / SD Card Files Cleanup

#### USB / SD Card Files Cleanup

The files saved in the external USB disk

Current Path: [sda1 /](#)

Directory:

Delete Selected File View: 10

| <input type="checkbox"/> | Name                         | Type      | Date                          | Size     | Options |
|--------------------------|------------------------------|-----------|-------------------------------|----------|---------|
| <input type="checkbox"/> | test_bak.tar                 | File      | 2016-11-14 07:14:14 UTC-05:00 | 17.00 KB |         |
| <input type="checkbox"/> | backup_2016nov14_121324.tar  | File      | 2016-11-14 07:13:50 UTC-05:00 | 6.17 MB  |         |
| <input type="checkbox"/> | PBX_Recordings_000B828F6092  | Directory | 2016-11-14 07:12:28 UTC-05:00 | 4.00 KB  |         |
| <input type="checkbox"/> | PBX_Conferences_000B828F6092 | Directory | 2016-11-14 07:12:28 UTC-05:00 | 4.00 KB  |         |
| <input type="checkbox"/> | PBX_Queue_000B828F6092       | Directory | 2016-11-14 07:12:28 UTC-05:00 | 4.00 KB  |         |

Total: 5 Show: 1/1 Go to:

The files saved in the external SD card

Current Path: [mmcblk1p1 /](#)

Directory:

Delete Selected File View: 10

| <input type="checkbox"/> | Name      | Type | Date                          | Size    | Options |
|--------------------------|-----------|------|-------------------------------|---------|---------|
| <input type="checkbox"/> | test3.tar | File | 2016-11-11 11:50:56 UTC-05:00 | 7.00 KB |         |

Figure 240: USB/SD Card Files Cleanup

Table 119: USB/SD Card files Cleanup

|                             |  |
|-----------------------------|--|
| <b>Current Path</b>         | Displays the current path.                             |
| <b>Directory</b>            | Select the directory user want to clean.               |
| <b>Delete Selected File</b> | Select multiple entries to delete from USB or SD card. |



## Reset and Reboot

Users could perform reset and reboot under Web GUI->**Maintenance**->**Reset and Reboot**.

To factory reset the device, select the mode type first. There are two different types for reset.

- User Data: All the data including voicemail, recordings, IVR Prompt, Music on Hold, CDR and backup files will be cleared.
- All: All the configurations and data will be reset to factory default.

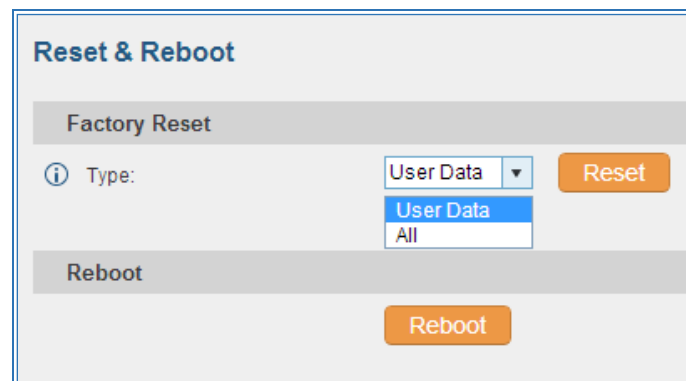


Figure 241: Reset and Reboot

## Syslog

On the UCM6200, users could dump the syslog information to a remote server under Web GUI->**Maintenance**->**Syslog**. Enter the syslog server hostname or IP address and select the module/level for the syslog information.

The default syslog level for all modules is "error", which is recommended in your UCM6200 settings because it can be helpful to locate the issues when errors happen.

Some typical modules for UCM6200 functions are as follows and users can turn on "notic" and "verb" levels besides "error" level.

pbx: This module is related to general PBX functions.

chan\_sip: This module is related to SIP calls.

chan\_dahdi: This module is related to analog calls (FXO/FXS).

app\_meetme: This module is related to conference bridge.



 **Note:**

Syslog is usually for debugging and troubleshooting purpose. Turning on all levels for all syslog modules is not recommended for daily usage. Too many syslog print might cause traffic and affect system performance.


---

## Troubleshooting

On the UCM6200, users could capture traces, ping remote host and traceroute remote host for troubleshooting purpose under Web GUI->**Maintenance**->**Troubleshooting**.

### Ethernet Capture

The captured trace can be downloaded for analysis. Also the instructions or result will be displayed in the web GUI output result.

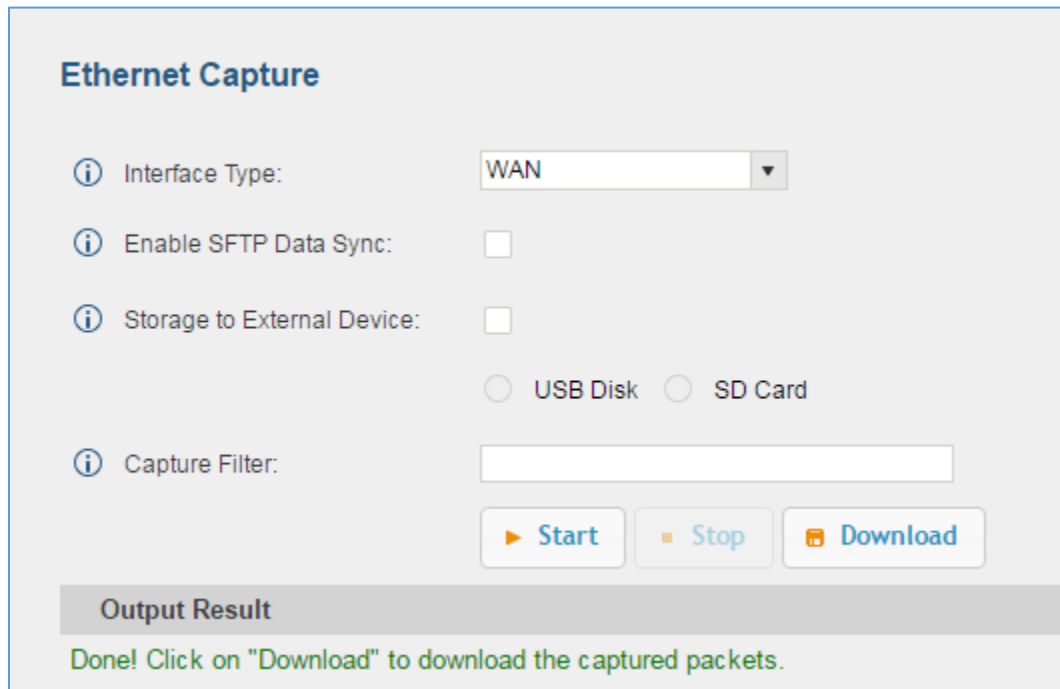

**Figure 242: Ethernet Capture**

**Table 120: Ethernet Capture**

|                                   |   |
|-----------------------------------|---|
| <b>Interface Type</b>             | Select the network interface to monitor.  |
| <b>Enable SFTP Data Sync</b>      | Check this box to save the capture files in the SFTP server. Please make sure the configuration of data synchronization works before. |
| <b>Storage to External Device</b> | Check this box to activate storage of the capture either on the USB   |





|                       |  |
|-----------------------|--|
|                       | or SD Card.  |
| <b>Capture Filter</b> | Enter the filter to obtain the specific types of traffic, such as (host, src, dst, net, proto...). |
| <b>Start</b>          | Click to start the trace.  |
| <b>Stop</b>           | Click to stop the trace.   |
| <b>Download</b>       | Click to download the trace if trace is stored locally.  |

The output result is in .pcap format. Therefore, users could specify the capture filter as used in general network traffic capture tool (host, src, dst, net, protocol, port, port range) before starting capturing the trace.

## IP Ping

Enter the target host in host name or IP address. Then press "Start" button. The output result will dynamically display in the window below.

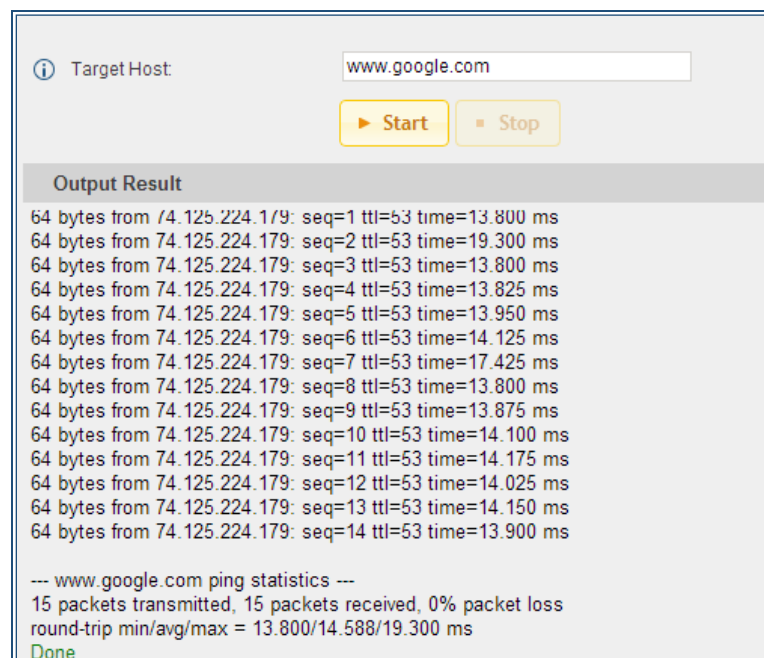


Figure 243: Ping

## Traceroute

Enter the target host in host name or IP address. Then press "Start" button. The output result will dynamically display in the window below.



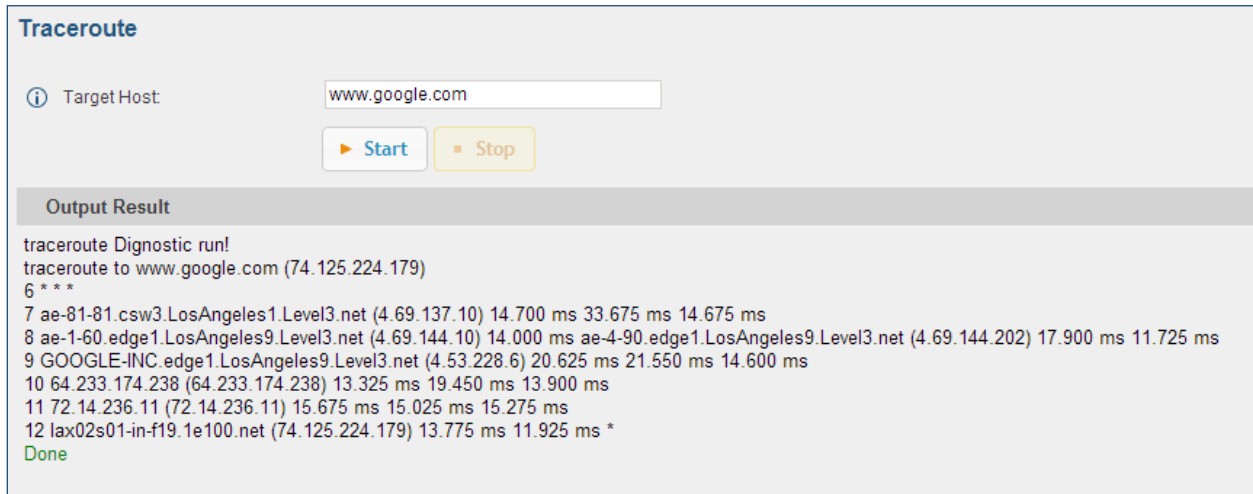


Figure 244: Traceroute

## Analog Record Trace

### - Analog Record Trace

Analog record trace can be used to troubleshoot analog trunk issue, for example, the UCM6200 user has caller ID issue for incoming call from Analog trunk. Users can access analog record trace under web GUI->**Maintenance->Troubleshooting ->Analog Record Trace**.

Here is the step to capture trace:

1. Select FXO or FXS for "Record Ports". If the issue happens on FXO 1, select FXO port 1 to record the trace.
2. Select "Record Direction".
3. Select "Record File Mode" to separate the record per direction or mix.
4. Click on "Start".
5. Make a call via the analog port that has the issue.
6. Once done, click on "Stop".
7. Click on "Download" to download the analog record trace.

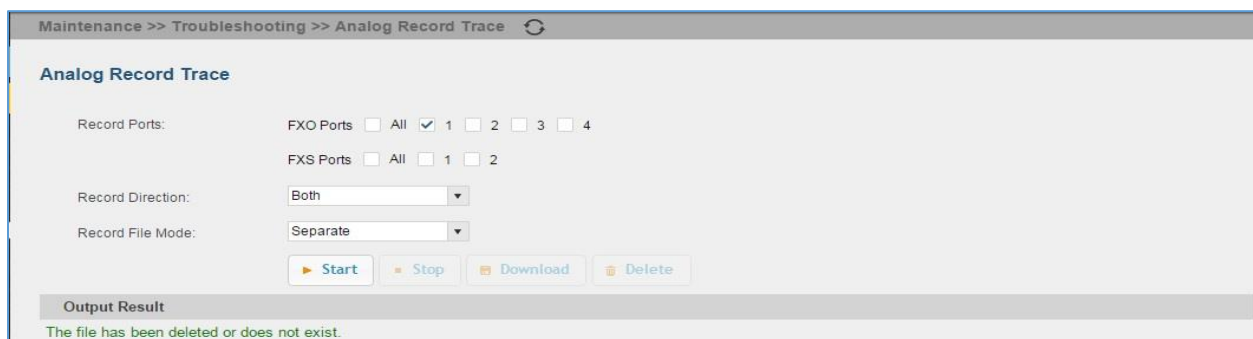


Figure 245: Troubleshooting Analog Trunks



### - A key Dial-up FXO

Users can directly set a PSTN number on the “**External Extension**” text box to troubleshoot issues related to the analog trunk easily, the following steps shows how to use this feature:

1. Configure analog trunk on UCM, including outbound route.
2. Enter a reachable external number in “**External Extension**”.
3. Press “**Start**” button. The call will be initiated to the external number.
4. Answer and finish the call before pressing “**Stop**” button.

The trace will be available for analysis to download after output result shows “Done! Click on Download to download the captured packets”.

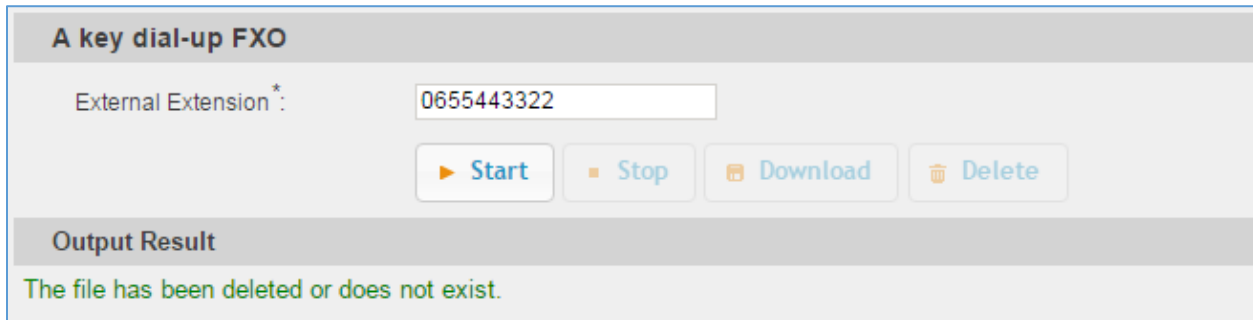


Figure 246: A Key Dial-up FXO

**Note:** When using a Key Dial-up FXO feature the outbound trunk for the analog trunk need to have internal permission. As well as it should be the trunk with the highest outbound route priority.

After capturing the trace, users can download it for basic analysis. Or you can contact Grandstream Technical support in the following link for further assistance if the issue is not resolved.

<http://www.grandstream.com/index.php/support>

### Service Check

Enable Service Check to periodically check UCM6200. Check Cycle is configurable in seconds and the default setting is 60 sec. Check Times is the maximum number of failed checks before restart the UCM6200. The default setting is 3. If there is no response from UCM6200 after 3 attempts (default) to check, current status will be stored and the internal service in UCM6200 will be restarted.

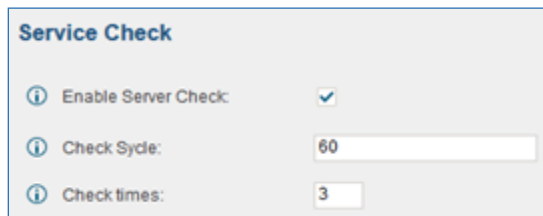



Figure 247: Service Check



## Network Status

In UCM6200 web UI->Maintenance->Troubleshooting->Network Status, the users can view active Internet connections. This information can be used to troubleshoot connection issue between UCM6200 and other services.

Maintenance >> Troubleshooting >> Network Status 

### Network Status

Active Internet Connections (Servers And Established)

| Proto | Recv-Q | Send-Q | Local-Address       | Foreign-Address     | State       |
|-------|--------|--------|---------------------|---------------------|-------------|
| tcp   | 0      | 0      | 0.0.0.0:7777        | 0.0.0.0:*           | LISTEN      |
| tcp   | 0      | 0      | 0.0.0.0:5060        | 0.0.0.0:*           | LISTEN      |
| tcp   | 0      | 0      | 0.0.0.0:5061        | 0.0.0.0:*           | LISTEN      |
| tcp   | 0      | 0      | 0.0.0.0:389         | 0.0.0.0:*           | LISTEN      |
| tcp   | 0      | 0      | 0.0.0.0:80          | 0.0.0.0:*           | LISTEN      |
| tcp   | 0      | 0      | 0.0.0.0:8089        | 0.0.0.0:*           | LISTEN      |
| tcp   | 0      | 0      | 192.168.40.151:8089 | 192.168.40.191:2852 | ESTABLISHED |
| tcp   | 0      | 1074   | 192.168.40.151:8089 | 192.168.40.191:2849 | ESTABLISHED |
| tcp   | 0      | 0      | 192.168.40.151:8089 | 192.168.40.191:2848 | ESTABLISHED |
| tcp   | 0      | 0      | 192.168.40.151:8089 | 192.168.40.191:2851 | ESTABLISHED |
| tcp   | 0      | 0      | 127.0.0.1:52450     | 127.0.0.1:7777      | ESTABLISHED |
| tcp   | 0      | 0      | 192.168.40.151:8089 | 192.168.40.191:2850 | ESTABLISHED |
| tcp   | 0      | 0      | 192.168.40.151:8089 | 192.168.40.191:2845 | TIME_WAIT   |
| tcp   | 0      | 0      | 127.0.0.1:7777      | 127.0.0.1:52450     | ESTABLISHED |
| tcp   | 0      | 0      | :::389              | :::*                | LISTEN      |

Figure 248: Network Status

## Remote Access

### SSH Access

SSH switch now is available via web UI and LCD. User can enable or disable SSH access directly from web UI or LCD screen. For web SSH access, please log in UCM6200 web interface and go to **Maintenance->Remote Access->SSH Access**. By default, SSH access is disabled for security concerns. It is highly recommended to only enable SSH access for debugging purpose.



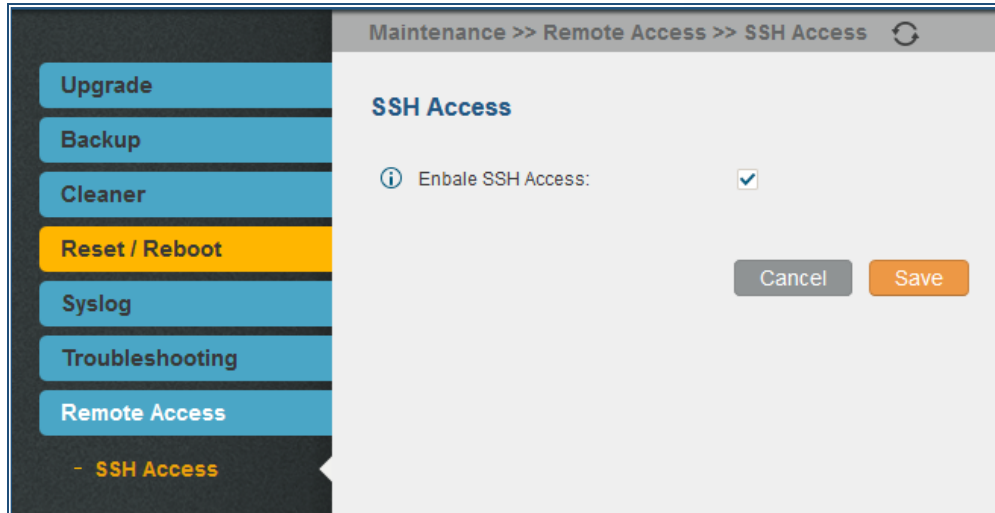


Figure 249: SSH Access



## EXPERIENCING THE UCM6200 SERIES IP PBX

Please visit our website: <http://www.grandstream.com> to receive the most up- to-date updates on firmware releases, additional features, FAQs, documentation and news on new products.

We encourage you to browse our [product related documentation](#), [FAQs](#) and [User and Developer Forum](#) for answers to your general questions. If you have purchased our products through a Grandstream Certified Partner or Reseller, please contact them directly for immediate support.

Our technical support staff is trained and ready to answer all of your questions. Contact a technical support member or [submit a trouble ticket online](#) to receive in-depth support.

Thank you again for purchasing Grandstream UCM6200 series IP PBX appliance, it will be sure to bring convenience and color to both your business and personal life.

**\* Asterisk is a Registered Trademark of Digium, Inc**